

**ATTACHMENT C: TESTING AND MONITORING PLAN**  
**40 CFR 146.90**

**CTV III**

**Facility Information**

Facility Name: CTV III

Facility Contact: William Chessum / Technical Manager  
(562) 999-8380 / [William.chessum@crc.com](mailto:William.chessum@crc.com)

Well location: Project Area, San Joaquin County, CA  
37.89 / -121.53

This Testing and Monitoring Plan describes how CTV will monitor the project site pursuant to 40 CFR 146.90. The monitoring data will be used to demonstrate that the wells are operating as planned, the carbon dioxide plume and pressure front are moving as predicted, and that there is no endangerment to USDWs. In addition, the monitoring data will be used to validate and adjust the computational model used to predict the distribution of the CO<sub>2</sub> within the storage zone, supporting AoR re-evaluations and a non-endangerment demonstration.

Results of the testing and monitoring activities described below may trigger action according to the Emergency and Remedial Response Plan.

***Quality assurance procedures***

A quality assurance and surveillance plan (QASP) for all testing and monitoring activities, required pursuant to 146.90(k), is provided in the Appendix to this Testing and Monitoring Plan.

***Reporting procedures***

CTV will report the results of all testing and monitoring activities to the EPA in compliance with the requirements under 40 CFR 146.91.

**Carbon Dioxide Stream Analysis [40 CFR 146.90(a)]**

CTV will analyze the CO<sub>2</sub> stream during the operation period to yield data representative of its chemical and physical characteristics and to meet the requirements of 40 CFR 146.90(a). Samples will be collected and analyzed quarterly, starting three months after the start of injection and every three months thereafter.

CO<sub>2</sub> will be sourced from a blue hydrogen and ammonia plant (up to 377,000 tonnes per annum) that will be located in proximity to the storage site, direct air capture and other CO<sub>2</sub> sources in

the project area. Notification will be sent to the EPA prior to switching or adding CO<sub>2</sub> sources, at which time the sampling procedures can be reassessed.

### ***Sampling location and frequency***

CO<sub>2</sub> injectate samples will be taken between the final compression stage and the wellhead. Sampling will take place three months after the date of authorization of injection and every three months thereafter.

CTV will increase the frequency and collect additional samples if the following occurs:

1. Significant changes in the chemical or physical characteristics of the CO<sub>2</sub> injectate, such as a change in the CO<sub>2</sub> injectate source; and
2. Facility or injector downtime is greater than thirty days.

### ***Analytical parameters***

CTV will analyze the water content and injectate the constituents identified in Table 1 using the methods listed. An equivalent method may be employed with the prior approval of the UIC Program Director.

**Table 1. Summary of analytical parameters for CO<sub>2</sub> stream.**

Parameter	Analytical Method(s)
Oxygen, Argon and Hydrogen	ISBT 4.0 (GC/DID) GC/TCD
Nitrogen	ISBT 4.0 (GC/DID) GC/TCD
Carbon Monoxide	ISBT 5.0 (Colorimetric) ISBT 4.0 (GC/DID)
Total Hydrocarbons	ISBT 10.0 THA (FID)
Ammonia	ISBT 6.0 (DT)
Ethanol	ISBT 11.0 (GC/FID)
Oxides of Nitrogen	ISBT 7.0 Colorimetric
Methane, Ethane, Ethylene	ISBT 10.1 (FID)
Hydrogen Sulfide and Sulfur Dioxide	ISBT 14.0 (GC/SCD)
CO <sub>2</sub> purity	ISBT 2.0 Caustic absorption Zahm-Nagel ALI method SAM 4.1 subtraction method (GC/DID) GC/TCD
δ13C	Isotope ratio mass spectrometry

### ***Sampling methods***

CO<sub>2</sub> stream sampling will occur in the last compressor station prior to being sent to the injector. A sampling station will be installed to facilitate collection of samples into a container. Sample containers will have a chain of custody form and will be labeled appropriately.

### ***Laboratory to be used/chain of custody and analysis procedures***

Samples will be sent to, and analysis conducted by is a state certified laboratory. The current plan is to use Eurofins TestAmerica (Eurofins) at 880 Riverside Parkway in Sacramento, CA. The laboratory has all the necessary equipment, experience, and certifications to complete the analysis. The detection limit and precision can be found in the QASP, Table 3.

Eurofins has a chain of custody procedure that includes the following.

1. Sample date
2. Sample description
3. Sample type
4. Relinquished by and received by signature
5. Sampler name
6. Location information

## **Continuous Recording of Operational Parameters [40 CFR 146.88(e)(1), 146.89(b) and 146.90(b)]**

CTV will install and use continuous recording devices to monitor injection pressure, rate, and volume; the pressure on the annulus between the tubing and the long string casing; the annulus fluid volume added; and the temperature of the CO<sub>2</sub> stream, as required by 40 CFR 146.88(e)(1), 146.89(b), and 146.90(b).

### ***Monitoring location and frequency***

CTV will perform the activities identified in Table 2 to monitor operational parameters and verify internal mechanical integrity of the injection well. All monitoring will take place at the locations and frequencies shown in the table.

Monitoring for the parameters, except for annulus fluid volume, will be continuous with a 10 second sampling and 30 second recording frequency for both active and shut-in periods. This will be adequate to monitor for changes in the wellbore and the reservoir.

**Table 2. Sampling devices, locations, and frequencies for continuous monitoring.**

Parameter	Device(s)	Location	Min. Sampling Frequency	Min. Recording Frequency
Injection pressure	Pressure Gauge	Surface and Downhole	10 seconds	30 seconds
Injection rate	Flowmeter	Surface	10 seconds	30 seconds
Injection volume	Calculated	Surface	10 seconds	30 seconds
Annular pressure	Pressure Gauge	Surface	10 seconds	30 seconds
Annulus fluid volume		Surface	4 hours	24 hours
Temperature	Temperature Gauge	Surface and Downhole	10 seconds	30 seconds
Temperature	DTS	Along wellbore to packer	10 seconds	30 seconds

Notes:

- Sampling frequency refers to how often the monitoring device obtains data from the well for a particular parameter. For example, a recording device might sample a pressure transducer monitoring injection pressure once every two seconds and save this value in memory.
- Recording frequency refers to how often the sampled information gets recorded to digital format (such as a computer hard drive). For example, the data from the injection pressure transducer might be recorded to a hard drive once every minute.

### ***Monitoring Details***

#### **Injection Rate and Pressure Monitoring**

Injection pressure (gauge), temperature and flow rate (flow meter) will be continuously monitored and recorded by the CTV Central Command Facility (CCF). Injection rate and pressure

limitations will be implemented to ensure adherence to the maximum allowable bottomhole injection pressure of 90% of the injection zone's fracture pressure. Pressure and temperature gauges will be calibrated as shown in QASP Table 6.

### **Calculation of Injection Volumes**

The volume of CO<sub>2</sub> injected into the Mokelumne River Formation will be calculated from the injection flow rate and CO<sub>2</sub> density. Density of CO<sub>2</sub> injected into the Mokelumne River Formation will be calculated using PVTP, a fluid thermodynamics package, developed by Petroleum Experts Ltd. PVTP is an industry standard software package that has been used extensively in CO<sub>2</sub> EOR applications to accurately model and match CO<sub>2</sub> PVT properties over a wide range of temperatures and pressures.

### **Annular Pressure Monitoring**

Annulus pressure is monitored continuously (every 10 seconds) with a surface pressure sensor to monitor for integrity of the casing, packer, and tubing. The annulus will be filled with a non-corrosive and incompressible aqueous packer fluid. Deviations in the annular pressure above certain thresholds may indicate a well integrity issue that will be investigated. Thresholds and alarms will be defined during pre-operational testing.

The surface pressure that will be maintained on the casing-tubing annulus for each injector is listed in Table 3 based on starting and ending injection conditions. The minimum surface pressure is 100 psi to ensure that any drop in pressure or annular fluid level is identified with the SCADA alarming system. The pressures are also found in the Appendix: Operating Procedure document with additional context.

**Table 3. Injector Annulus Pressure Limits.**

Well Name	Min Pressure (psi)	Max Pressure (psi)
C1	100	315
C2	100	605
E1	100	216
E2	100	396
W1	100	210
W2	100	449

## **Injection Rate**

The injection rate will be monitored with a Coriolis flowmeter. The meter will be calibrated for the expected flow rate range using accepted standards and will be accurate to within 0.1 percent.

## **Corrosion Monitoring**

To meet the requirements of 40 CFR 146.90(c), CTV will monitor well materials during the operation period for loss of mass, thickness, cracking, pitting, and other signs of corrosion to ensure that the well components meet the minimum standards for material strength and performance. CTV will monitor corrosion using corrosion coupons and collect samples according to the description below.

### ***Monitoring location and frequency***

Monitoring will be conducted quarterly during the injection period, starting three months after injection begins and quarterly thereafter. Monitoring results will be documented and submitted to the EPA as per 40 CFR 146.91 (a)(7). CTV will continually update the corrosion monitoring plan as data is acquired.

### ***Sample description***

Samples of the materials used in the construction of the surface flowline equipment, wellheads, and injection and monitoring well tubulars that are exposed to CO<sub>2</sub> injectate will be monitored for corrosion using corrosion coupons. Representative materials (Table 3) will be weighed, measured, and photographed prior to installation. General construction materials for pipeline, tubing and wellhead are shown in Table 4. Updated materials will be provided prior to injection as part of pre-operational testing.

**Table 4. List of equipment coupon with material of construction.**

<b>Equipment Coupon</b>	<b>Material of Construction</b>
Pipeline	Carbon Steel
Casing (flow-wetted)	Chrome Alloy
Tubing	Chrome Alloy
Wellhead	Chrome Alloy

### ***Monitoring details***

The corrosion coupons will be located in the pipeline that feeds CO<sub>2</sub> injectate to the injectors. Quarterly the coupons will be sent to a lab and photographed, measured, visually inspected, and weighed to a resolution of 0.1 milligram. The samples will be handled and assessed in accordance with ASTM G1-03.

A detected corrosion rate of greater than 0.3 mils/year will initiate consultation with the EPA. In addition, a casing inspection log may be run to assess the thickness and quality of the casing if the corrosion rate exceeds 0.3 mils/year.

### **Above Confining Zone Monitoring**

CTV will monitor groundwater quality and geochemical changes above the confining zone during the operation period to meet the requirements of 40 CFR 146.90(d). Monitoring above the confining zone will include the following:

1. Undifferentiated non-marine- lowermost USDW will be monitored between approximately 2,300 to 2,340 feet MD in the USDW monitoring wells.
2. Domengine Formation – between the confining layer and USDW from 5,240 – 5,400 feet MD in D1.

### ***Monitoring location and frequency***

Table 4 shows the planned monitoring methods, locations, and frequencies for ground water quality and geochemical monitoring above the confining zone. Figure 1 shows the location for the monitoring well locations with respect to the AoR. The wells are located within the project boundary, and CTV has obtained surface access for the duration of the project.

#### **Undifferentiated Non-Marine**

CTV will monitor the lowermost USDW in the undifferentiated non-marine sediments. Monitoring will include pressure, temperature, and fluid sampling. Leakage to the lowermost USDW would increase the aquifer pressure and change the composition of the formation water (increased CO<sub>2</sub> concentration). Based on having groundwater less than 10,000 ppm TDS, the proposed monitoring zone is a USDW. However, the water supply wells in the AoR are completed at much shallower depths that are above the base of fresh water, which is at about 1,000 ft MD. Monitoring of the lowermost USDW is more protective than monitoring the freshwater aquifers because impacts would occur in the lowermost USDW before the freshwater aquifers.

The locations of groundwater monitoring wells are often based on the local groundwater gradient. There are very few groundwater supply wells in this area because there is a plentiful supply of surface water. Therefore, groundwater gradient maps don't show any water level elevations this area. Thus, groundwater gradients are not expected to be significant due to the lack of pumping. The locations of the two monitoring wells are planned on opposite sides of the CO<sub>2</sub> plume to the northeast and southwest within reasonable proximity to the injection wells and well identified as requiring a corrective action plan.

Prior to injection, an updated baseline analysis will be completed for the USDW monitoring well. Future results will be compared against these baseline results for significant changes or anomalies. In particular, pH will be monitored as a key indicator of CO<sub>2</sub> presence.

Additional groundwater monitoring wells will be drilled to assess and monitor the lowermost USDW if the following occurs:

1. Domengine Formation monitoring well indicates increased pressure due to Mokelumne River Formation CO<sub>2</sub> injection.
2. Lowermost USDW aquifer pressure or composition changes due to Mokelumne River Formation CO<sub>2</sub> injection.

#### Domengine Formation


The Domengine Formation has permeable sands and is observed between the confining zone and Undifferentiated Non-marine lowermost USDW with the capacity to dissipate CO<sub>2</sub> injectate as a secondary storage reservoir. The Domengine will be monitored continuously for pressure and temperature changes and quarterly via fluid sampling within a continuous sand. Leakage from the Mokelumne River Formation to the Domengine Formation will increase the reservoir pressure and decrease the temperature of the Domengine. This is the first porous interval above the sequestration reservoir.

The Domengine zone is continuous across the AoR. As such, D1 (Figure 1) will adequately monitor for pressure and temperature changes.

Prior to injection, baseline water analysis will be acquired for the Domengine Formation monitoring zone.

**Table 5. Monitoring of ground water quality and geochemical changes above the confining zone.**

Target Formation	Monitoring Activity	Monitoring Location(s)	Frequency	Depth
Undifferentiated Non-marine	Fluid Sampling	USDW Monitoring Well	Quarterly	2,500 – 2,520' MD/TVD
	Pressure/Temperature	USDW Monitoring Well	Continuously	
Domengine Formation	Pressure/Temperature	D1	Continuously	5,240 – 5,360' MD/TVD
	Fluid Sampling	D1	Quarterly	

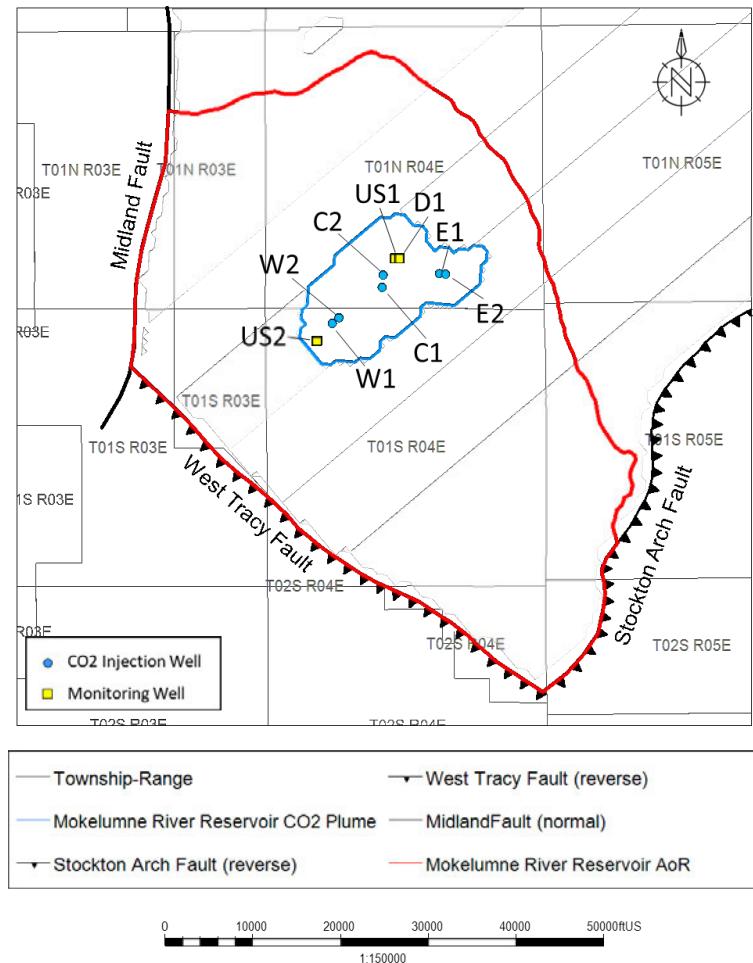

**Figure 1:** Map showing the location of wells (yellow squares) that will monitor zones above the upper confining zone. These monitoring wells will monitor the USDW (US1, US2) and the Domengine (D1).

### ***Analytical parameters***

Table 6 identifies the parameters to be monitored and the analytical methods CTV will use. Detection limits and precision are shown in QASP Table 3.

**Table 6. Summary of analytical and field parameters for water samples from the USDW monitoring well and the Domengine monitoring well.**

Parameters	Analytical Methods
<b>Undifferentiated Non-marine - Lowermost USDW</b>	
Cations (Al, Ba, Mn, As, Cd, Cr, Cu, Pb, Se, Zn, Tl)	ICP-MS EPA Method 6020
Cations (Ca, Fe, K, Mg, Na, Si)	ICP-OES EPA Method 6010B
Anions (Br, Cl, F, NO <sub>3</sub> , SO <sub>4</sub> )	Ion Chromatography, EPA Method 300.0
Dissolved CO <sub>2</sub>	Coulometric titration, ASTM D513-11
δ <sup>13</sup> C	Isotope ratio mass spectrometry
Hydrogen Sulfide	ISBT 14.0 (GC/SCD)
Total Dissolved Solids	Gravimetry; Method 2540 C
Oxygen, Aron, and Hydrogen	ISBT 4.0 (GC/DID GC/TCD)
Alkalinity	Method 2320B
pH (field)	EPA 150.1
Specific Conductance (field)	SM 2510 B
Temperature (field)	Thermocouple

### ***Sampling methods***

Samples will be collected using the following procedures:

1. Depth and elevation measurements for water level taken.
2. Wells will be purged such that existing water in the well is removed and fresh formation water is sampled.
3. Samples collected by lowering cleaned equipment downhole. Field measurements taken for pH, temperature, conductance, and dissolved oxygen.
4. Samples preserved and sent to lab as per chain of custody procedure.
5. Closure of well.

### ***Laboratory to be used/chain of custody procedures***

Samples will be sent to, and analysis conducted by is a state certified laboratory. The current plan is to use Eurofins TestAmerica (Eurofins) at 880 Riverside Parkway in Sacramento, CA. The

laboratory has all the necessary equipment, experience, and certifications to complete the analysis. The detection limit and precision can be found in the QASP, Table 3.

Eurofins has a chain of custody procedure that includes the following.

1. Sample date
2. Sample description
3. Sample type
4. Relinquished by and received by signature
5. Sampler name
6. Location information

### **Mechanical Integrity Testing**

CTV will conduct at least one test periodically during the injection phase to verify external mechanical integrity as required at 146.89(c) and 146.90. MITs on the injectors and Mokelumne River Formation monitoring wells will be performed annually, within 30 days of the commencement of the injection date, by one of two methods in Table 6. If CTV elects to conduct an alternate MIT, notification that includes the test and a description will be sent to the EPA for approval.

#### ***Testing location and frequency***

**Table 7. MITs.**

Test Description	Location
Temperature (DTS)	Along wellbore via DTS
Temperature Log	Along wellbore via wireline well log

#### ***Distributed Temperature Sensing (DTS)***

DTS is a fiber optic continuous temperature monitoring system that will measure the injector and monitoring wells annular temperature along the tubing. This will be used to assess the mechanical integrity of the well.

The following is procedures to utilize DTS for mechanical integrity analysis for an injector:

1. Establish baseline temperature profile that defines the natural gradient along the well.

2. During injection, record the temperature profile for 6 hours prior to shutting in the well. Stop injection and record the temperature for sufficient time to allow cooling.
3. Start injection and record the temperature profile for 6 hours.
4. Compare the baseline analysis to the time-lapse data for assessment of temperature anomalies that may indicate a well failure.

#### ***Temperature Logging Testing details***

CTV will follow the following procedures for MIT temperature logging:

1. Stabilize injection for 24 hours prior to running the temperature log. If possible, the wireline speed will be limited to 20 feet per minute or less. The temperature sensor should be located as close to the bottom of the tool string as possible (logging downhole).
2. Run a temperature survey from 200 feet above the Capay Shale base to the deepest point reachable in the well, while injecting at a rate that allows for safe operations.
3. Shut-in well and run multiple temperature surveys with 4 hours between runs.
4. Assess the acquired time lapse temperature profiles. As the well cools, the temperature profile is compared to the baseline. External integrity issues present themselves anomalies when compared to the baseline.
5. Evaluate data to determine if additional passes are needed for interpretation. Should CO<sub>2</sub> migration be interpreted in the topmost section of the log, additional logging runs over a higher interval will be required to find the top of migration.

#### **Pressure Fall-Off Testing**

CTV will perform pressure fall-off tests during the injection phase every five years as described below to meet the requirements of 40 CFR 146.90(f).

##### ***Testing location and frequency***

The main benefit of pressure fall-off testing is to assess injectivity, reservoir flow boundary distances and reservoir pressures. The fall-off test will be done on the two injectors every five years.

##### ***Testing details***

The following procedure will be followed:

1. Injection rate will be held constant prior to shut in. The injection rate will be high enough to produce a pressure buildup that will result in valid test data. The maximum operating pressure will not be exceeded.
2. The pressure falloff analysis will use several months of preceding injection data.
3. The test well should be shut-in at the wellhead to minimize wellbore storage and after-flow.
4. Upon shutting in the injector, surface and bottom-hole pressure and temperature measurements will be taken continuously every ten seconds. If there are offset injectors, rates will be held constant and recorded during the test.
5. The fall-off portion of the test will be conducted for a length of time sufficient that the pressure is no longer influenced by wellbore storage or skin.
6. Maintain accurate rate records for the test well and any offset wells completed in the same injection interval.
7. A report containing the pressure falloff data and interpretation of the reservoir pressure will be submitted to the EPA within 90 days of the test.

Pressure sensors used for this test will be the wellhead gauges and a downhole gauge for the pressure falloff test. Each gauge will meet or exceed ASME B 40.1 Class 2A that provides 0.5% accuracy. CTV will refer to EPA Region 9 UIC Pressure Falloff Requirements for additional procedures such as planning and evaluation.

### **Carbon Dioxide Plume and Pressure Front Tracking**


CTV will employ direct and indirect methods to track the extent of the carbon dioxide plume and the presence or absence of elevated pressure during the operation period to meet the requirements of 40 CFR 146.90(g).

#### ***Plume monitoring location and frequency***

Table 6 presents the methods that CTV will use to monitor the position of the CO<sub>2</sub> plume, including the activities, locations, and frequencies. The parameters to be analyzed as part of fluid sampling in the injection zone and associated analytical methods are presented in Table 7. Quality assurance procedures for these methods are presented in Section B – Data Generation and Acquisition of the QASP.

Figure 2 shows the location of the wells that will monitor the CO<sub>2</sub> plume directly in the targeted Mokelumne River zone. These wells will actively monitor the development of the CO<sub>2</sub> plume upon the initiation of injection. If the plume development is not consistent with computation modeling

results, CTV will assess whether additional monitoring of the plume is necessary. Determination for plume monitoring changes will be made in consultation with the UIC Program Director and would trigger an AoR reevaluation, per the AoR and Corrective Action Plan.

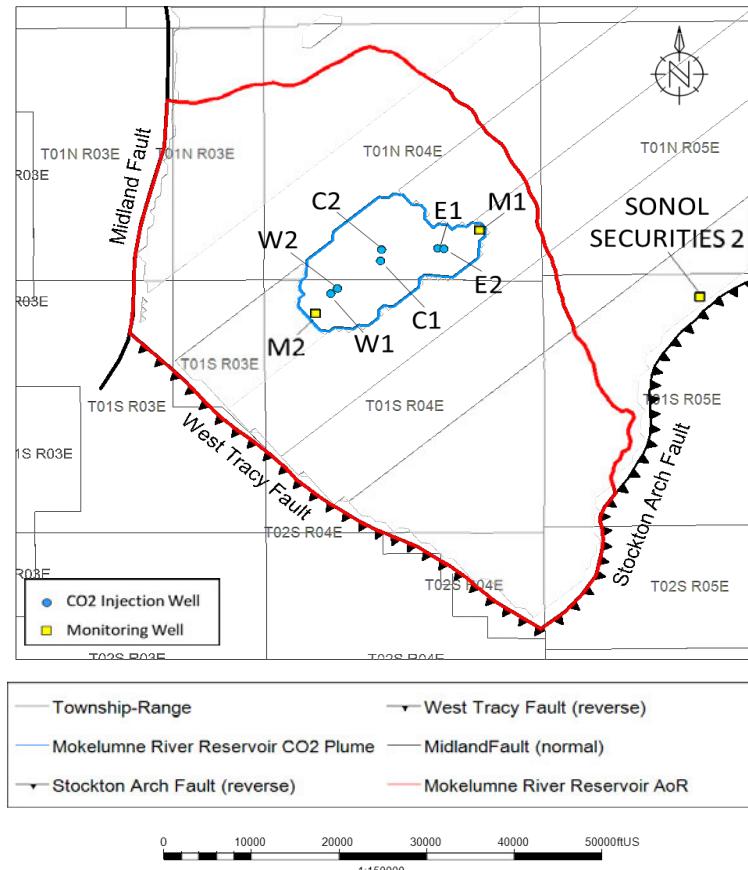

**Figure 2:** Map showing the location of wells (yellow squares) that will monitor the injection reservoir.

### ***Plume monitoring details***

Fluid sampling (quarterly), pressure and temperature monitoring will be conducted for direct measurement of the plume. This will provide data on plume location but more importantly, the CO<sub>2</sub> content/concentration of the plume. The parameters to be analyzed for fluid sampling are presented in Table 9.

The DTS from the two monitoring wells will provide continuous temperature from packer to surface.

As discussed in the AoR and Corrective Action Plan, 83% of the post-shut-in injected CO<sub>2</sub> will remain as super-critical. Fluid samples will be taken, and CTV expects that there will be minor changes to pH, dissolved CO<sub>2</sub>, and water density.

Indirect plume monitoring will include pulse neutron logs (PNL) to understand CO<sub>2</sub> saturation changes through time. Prior to injection, a pulse neutron log will be run as a baseline. A PNL will be run on the monitoring wells every two years during the injection phase.

**Table 8. Plume monitoring activities.**

<b>DIRECT PLUME MONITORING</b>				<b>Depths</b>
Mokelumne River Formation	Fluid Sampling	M-1, M-2	Quarterly	M-1: 5744 – 7668 MD M-2: 6160 - 7700 MD Sonol Securities 2: 5731 - 5792 MD
Mokelumne River Formation	Pressure and temperature	M-1, M-2 & Sonol Securities 2	Continuously	
<b>INDIRECT PLUME MONITORING</b>				
Mokelumne River Formation	Pulse Neutron Logging	M-1, M-2	Every two years from start of injection.	


**Table 9. Summary of analytical and field parameters for fluid sampling in the injection zone**

<b>Parameters</b>	<b>Analytical Methods</b>
<b>Mokelumne River Formation</b>	
Cations (Al, Ba, Mn, As, Cd, Cr, Cu, Pb, Se, ZN, Tl)	ICP-MS EPA Method 6020
Cations (Ca, Fe, K, Mg, Na, Si)	ICP-OES EPA Method 6010B
Anions (Br, Cl, F, NO <sub>3</sub> , SO <sub>4</sub> )	Ion Chromatography, EPA Method 300.0
Dissolved CO <sub>2</sub>	Coulometric titration ASTM D513-11
δ13C	Isotope ratio mass spectrometry
Hydrogen Sulfide	ISBT 14.0 (GC/SCD)
Oxygen, Argon and Hydrogen	ISBT 4.0 (GC/DID) GC/TCD
Total Dissolved Solids	Gravimetry; Method 2540 C
Alkalinity	Method 2320B
pH (field)	EPA 150.1
Specific Conductance (field)	SM 2510 B
Temperature (field)	Thermocouple

### Pressure-front monitoring location and frequency


Table 10 presents the methods that CTV will use to monitor the position of the pressure front, including the activities, locations, and frequencies CTV will employ. Quality assurance procedures for these methods are presented in Section B – Data Generation and Acquisition of the QASP.

The pressure increase front defining the AoR boundary reaches its maximum extent 14 years into injection in the project. Pressure front will be monitored with 2 wells within the CO<sub>2</sub> plume, and an additional well to the East of the project outside of the AoR in order to track the pressure change in the reservoir and ensure it is similar to that predicted by computational modeling. Monitoring well locations with respect to plume development through time are shown in Figure 3.

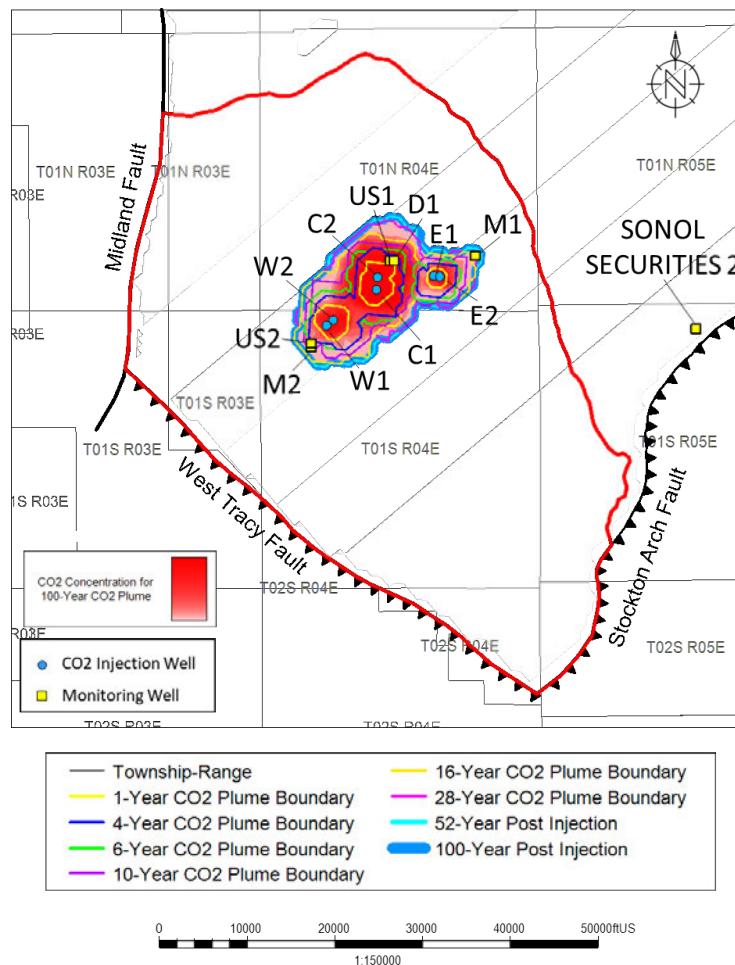

**Figure 3.** Map showing the location of monitoring wells and plume development through time from the computational model. Monitoring wells M1, M2, and Sonol Securities 2 (SS2) monitor the injection interval, D1 monitors the dissipation zone, and US1 and US2 monitor the USDW.

Monitoring well pressure development based on computational is modeled in Figure 4. Note that the pressure at Monitoring well location M2 drops below 2950 psi roughly 10years after the end of injection and drops down back to initial conditions roughly 50years after the end of injection.

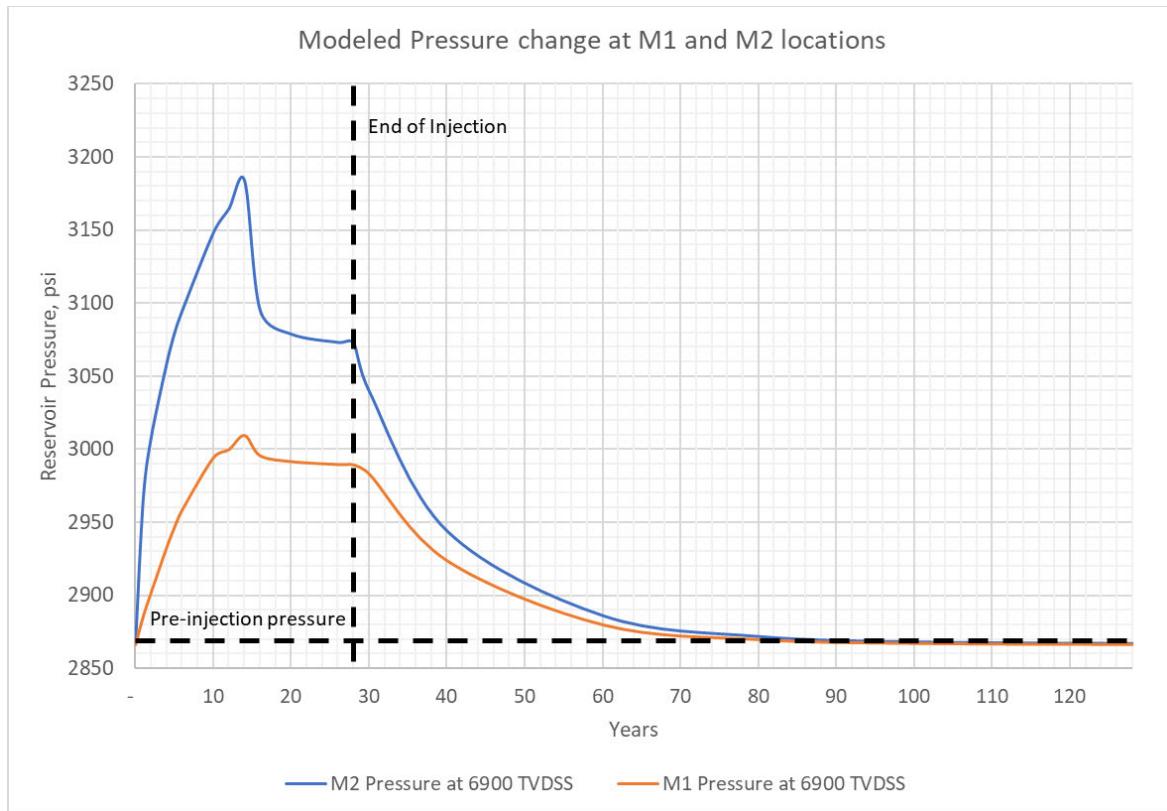

**Figure 4:** Modeled pressure at monitoring well locations M1 & M2 at 6920' TVDSS during the injection period and 100 years post injection

#### ***Pressure-front monitoring details***

Direct pressure monitoring of the plume will be achieved through installation of pressure gauges in monitoring wells M-1, M-2 and Sonol Securities 2 (SS 2). CTV will compare the pressure and rate increase from the computational model to the monitoring data to validate computational modeling results and identify operational discrepancies, ensuring suitable definition of the AoR and plume throughout the life of the project.

**Table 10. Pressure-front monitoring activities.**

Target Formation	Monitoring Activity	Monitoring Location(s)	Frequency
<b>DIRECT PRESSURE-FRONT MONITORING</b>			
Mokelumne River Formation	Pressure and temperature monitoring	M-1, M-2 and Sonol Securities 2	Continuous
<b>INDIRECT PRESSURE-FRONT MONITORING</b>			
All formations	Seismicity	AoR	Continuous

***Induced Seismicity and Fault Monitoring***

CTV will monitor seismicity with surface and shallow borehole seismometers in the AoR. The seismometers will be able to detect events with a magnitude 0 to 0.5 and will be installed one year prior to injection to provide baseline seismicity. In addition, CTV will monitor the Northern California Earthquake Data Center (NCEDC) network for seismic events. Historical seismicity within the area will be accounted for in the baseline assessment.

**Appendix: Quality Assurance and Surveillance Plan**

See Quality Assurance and Surveillance Plan