

APPENDIX 7.A
QUALITY ASSURANCE AND SURVEILLANCE PLAN

MARQUIS BIOCARBON PROJECT

Facility Information

Facility name: MARQUIS BIOCARBON PROJECT

Facility contact: ELIZABETH STEINHOUR
DIRECTOR OF ENVIRONMENTAL AFFAIRS
10000 MARQUIS DRIVE, HENNEPIN, IL 61327
815.925.7300 / BETHSTEINHOUR@MARQUISENERGY.COM

Well name: MCI CCS 3

Well location: PUTNAM COUNTY, ILLINOIS
S2 T32N R2W
Latitude: 41.27026520 N, Longitude: 89.30939322 W

This Quality Assurance and Surveillance Plan (QASP) is approved for use and implementation at Marquis Biocarbon Project. The signatures below denote the approval of this document and intent to abide by the procedures outlined within it.

Signature

Date

ELIZABETH STEINHOUR
DIRECTOR OF ENVIRONMENTAL
AFFAIRS

Table of Contents

Distribution List.....	7
A Project Management	8
A.1. Project/Task Organization.....	8
A.1.1 Key Individuals and Responsibilities.....	8
A.1.2 Independence from Project QA Manager and Data Gathering.....	9
A.1.3 QA Project Plan Responsibility.....	9
A.1.4 Organizational Chart for Key Project Personnel	9
A.2. Problem Definition/Background	9
A.2.1 Reasoning	9
A.2.2 Reasons for Initiating the Project	10
A.2.3 Regulatory Information, Applicable Criteria, Action Limits.....	10
A.3. Project/Task Description	10
A.3.1 Summary of Work to be Performed and Work Schedule.....	10
A.3.2 Geographic Location	17
A.3.3 Resource and Time Constraints.....	18
A.4. Quality Objectives and Criteria	18
A.4.1 Performance/Measurement Criteria	18
A.4.2 Precision.....	27
A.4.3 Bias.....	27
A.4.4 Representativeness	27
A.4.5 Completeness	27
A.4.6 Comparability.....	27
A.5. Special Training/Certifications.....	27
A.5.1 Specialized Training and Certifications	28
A.5.2 Training Provider and Responsibility	28
A.6. Documentation and Records.....	28
A.6.1 Report Format and Package Information	28
A.6.2 Other Project Documents, Records, and Electronic Files.....	28

A.6.3 Data Storage and Duration.....	28
A.6.4 QASP Distribution Responsibility	28
B. Data Generation and Acquisition	29
B.1. Sampling Process Design (Pre-Injection Phase).....	29
B.1.1 Design Strategy.....	29
B.1.2 Type and Number of Samples/Test Runs	32
B.1.3 Site/Sampling Locations	32
B.1.4 Sampling Site Contingency	32
B.1.5 Activity Schedule.....	32
B.1.6 Critical/Informational Data.....	33
B.1.7 Sources of Variability	33
B.2. Sampling Methods	34
B.2.1 Sampling SOPs	34
B.2.2 In-Situ Monitoring.....	35
B.2.3 Continuous Monitoring.....	35
B.2.4 Sample Homogenization, Composition, Filtration	36
B.2.5 Sample Containers and Volumes	36
B.2.6 Sample Preservation	36
B.2.7 Cleaning/Decontamination of Sampling Equipment	37
B.2.8 Support Facilities	38
B.2.9 Corrective Action, Personnel, and Documentation.....	38
B.3. Sample Handling and Custody	38
B.3.1 Maximum Hold Time/Time Before Retrieval	39
B.3.2 Sample Transportation	39
B.3.3 Sampling Documentation	39
B.3.4 Sample Identification	39
B.3.5 Sample Chain-of-Custody.....	39
B.4. Analytical Methods	40
B.4.1 Analytical SOPs	40
B.4.2 Equipment/Instrumentation Needed	40
B.4.3 Method Performance Criteria	40
B.4.4 Analytical Failure	40
B.4.5 Sample Disposal	40

B.4.6 Laboratory Turnaround.....	40
B.4.7 Method Validation for Nonstandard Methods	40
B.5. Quality Control	42
B.5.1 QC Activities	42
B.5.2 Exceeding Control Limits	43
B.5.3 Calculating Applicable QC Statistics.....	43
B.6. Instrument/Equipment Testing, Inspection, and Maintenance.....	44
B.7. Instrument/Equipment Calibration and Frequency.....	44
B.7.1 Calibration and Frequency of Calibration.....	44
B.7.2 Calibration Methodology	45
B.7.3 Calibration Resolution and Documentation.....	45
B.8. Inspection/Acceptance for Supplies and Consumables	45
B.8.1 Supplies, Consumables, and Responsibilities	45
B.9. Non-direct Measurements	46
B.9.1 Seismic Monitoring Methods.....	46
B.10. Data Management.....	47
B.10.1 Data Management Scheme	47
B.10.2 Record-keeping and Tracking Practices	47
B.10.3 Data Handling Equipment/Procedures.....	47
B.10.4 Responsibility	47
B.10.5 Data Archival and Retrieval	47
B.10.6 Hardware and Software Configurations.....	47
B.10.7 Checklists and Forms.....	47
C. Assessment and Oversight.....	47
C.1. Assessments and Response Actions	47
C.1.1 Activities to be Conducted.....	47
C.1.2 Responsibility for Conducting Assessments.....	48
C.1.3 Assessment Reporting.....	48
C.1.4 Corrective Action.....	48
C.2. Reports to Management	48

C.2.1QA Status Reports	48
D. Data Validation and Usability.....	48
D.1. Data Review, Verification, and Validation	48
D.1.1 Criteria for Accepting, Rejecting, or Qualifying Data	48
D.2. Verification and Validation Methods	49
D.2.1 Data Verification and Validation Processes.....	49
D.2.2 Data Verification and Validation Responsibility.....	49
D.2.3 Issue Resolution Process and Responsibility.....	49
D.2.4 Checklist, Forms, and Calculations	49
D.3. Reconciliation with User Requirements.....	49
D.3.1 Evaluation of Data Uncertainty	49
D.3.2 Data Limitations Reporting	49
References.....	50

List of Tables

Table 7A-1: Distribution list.....	7
Table 7A-2: Key individuals and responsibilities.	8
Table 7A-3: Summary of testing and monitoring.....	13
Table 7A-4: Summary of direct geochemical measurements.....	16
Table 7A-5: Summary of analytical and field parameters for shallow Quaternary Groundwater Samples.....	20
Table 7A-6: Summary of laboratory analytical and field parameters for the deepest USDW, Galesville Sandstone, and Mt. Simon Sandstone groundwater samples.	21
Table 7A-7: Summary of analytical parameters for CO ₂ gas stream.	22
Table 7A-8: Summary of analytical parameters for corrosion coupons.	23
Table 7A-9: Mass Flow Rate Field Gauge— CO ₂ Mass Flow Rate.	23
Table 7A-10: Summary of measurement parameters for field gauges.	24
Table 7A-11: Pressure Field Gauge —Injection tubing, annulus, pipeline.	24
Table 7A-12: Temperature Field Gauge —Injection tubing, annulus, pipeline.	25
Table 7A-13: Pressure and temperature—bottomhole gauge specifications (PPS25).....	25
Table 7A-14: Representative logging tool specifications. Actual tools used will be comparable.	26

Table 7A-15: Actionable testing and monitoring outputs.	26
Table 7A-16: Stabilization criteria of water quality parameters during shallow well purging.....	34
Table 7A-17: Preservation, containers, and hold times for aqueous samples.	37
Table 7A-18: Preservation, containers, and hold times for aqueous samples.	37

List of Figures

Figure 7A-1: Marquis Carbon Injection LLC project organization structure.....	9
Figure 7A-2: Marquis Carbon Injection Project area showing location of the injection, deep, above confining zone (ACZ), and shallow groundwater monitoring wells.....	17
Figure 7A-3: Example label for groundwater sample bottles.....	39
Figure 7A-4: Example of chain-of-custody form for the CO ₂ injection stream gas analyses.	41
Figure 7A-5: Example chain-of-custody form for the fluid sample analyses.....	42

Distribution List

The following project participants (**Table 7A-1**) will receive the completed Quality Assurance and Surveillance Plan (QASP) and all future updates for the duration of the project. The Marquis Carbon Injection LLC Director of Environmental Affairs will be responsible for ensuring that all of those on the distribution list receive the most current copy of the approved QASP. Names in bold are the primary points of contact with addresses listed below.

Name	Organization	Project Role (s)	Contact Information (email / telephone)
Elizabeth Steinhour	Marquis	Director of Environmental Affairs - Lead for Environmental and Quality personnel	<small>Confidential, Privileged, or Sensitive Business Information</small> [REDACTED]
Trevor Davis	Marquis	Lead for Project Manager and MVA Task	<small>Confidential, Privileged, or Sensitive Business Information</small> [REDACTED]

Table 7A-1: Distribution list.

A Project Management

A.1. Project/Task Organization

A.1.1 Key Individuals and Responsibilities

The project will be led by Marquis Carbon Injection LLC (MCI). MCI will retain the services of qualified subcontractors. The performance of the Testing and Monitoring Plan will be shared between MCI and our designated subcontractor. This QASP describes the methods used to perform the activities listed in the Testing and Monitoring Plan.

The key roles and responsibilities of the personnel involved in implementation of the Testing and Monitoring Plan are listed in **Table 7A-2**.

Role	Responsibility
Project Manager	The Project Manager (PM) plays a central role in the implementation of all data gathering and analysis for the Project and provides overall coordination and responsibility for all organizational and administrative aspects. The PM is responsible for the planning, funding, schedules, and controls needed to implement project plans and ensure that project participants adhere to the plan.
Quality Representative	The role of the Quality Representative (QR) is to identify quality-affecting processes and to monitor compliance with project requirements. The QR is responsible for establishing and maintaining the project quality assurance plans and monitoring project staff compliance with them. The QR is responsible for ensuring that this Quality Assurance and Surveillance Plan (QASP) meets the project's quality assurance requirements.
Monitoring, Verification, and Accounting Task Lead	Well testing and monitoring activities are the responsibility of the Monitoring, Verification, and Accounting (MVA) Task Lead. The MVA Task Lead is responsible for developing, maintaining, and updating all well testing and monitoring plans, including this QASP.
Subject Matter Experts (SMEs) /Subtask Task Leads	The role of these SMEs is to develop testing and monitoring plans, to collect environmental data specified in those plans using best practices, and to maintain and update those plans as needed. The SMEs, assisted by the MVA Task Lead, are responsible for planning, collecting, and ensuring the quality of testing and monitoring data and managing all necessary metadata and provenance for these data. The SMEs are also often responsible for data analysis, data products and acquisition of independent data quality/peer reviews. The SMEs will be involved in the project as needed. They will be qualified third party individuals.

Table 7A-2: Key individuals and responsibilities.

A.1.2 Independence from Project QA Manager and Data Gathering

To ensure quality assurance, the sample collection process, data analysis and processing will be performed or witnessed by independent third parties outside the management structure in most cases.

A.1.3 QA Project Plan Responsibility

MCI will be responsible for maintaining and distributing the official, approved QASP. MCI will periodically review this QASP and consult with EPA when changes to the plan are required.

A.1.4 Organizational Chart for Key Project Personnel

Figure 7A-1: Marquis Carbon Injection LLC project organization structure is set out below. As depicted, the figure shows the organizational structure of the Marquis BioCarbon project. MCI will provide a contact list of individuals fulfilling these roles to the UIC Program Director, if required. The project manager and Monitoring, Verification, and Accounting (MVA) task lead are part of the Project Development team, and the Environmental and Quality representatives are part of the Environmental team.



Figure 7A-1: Marquis Carbon Injection LLC project organization structure.

A.2. Problem Definition/Background

A.2.1 Reasoning

The goals of the Testing and Monitoring Plan (Permit Section 7.0) include:

- Protecting Underground Sources of Drinking Water (USDWs);
- Meeting the regulatory requirements of 40 Code of Federal Regulations (CFR) 146.90;
- Ensuring that the injection well is operating as planned;
- Providing data to validate and calibrate the geological and dynamic models used to predict the distribution of carbon dioxide (CO₂) within the injection zone; and

- Support Area of Review (AoR) re-evaluations over the course of the project.

These objectives will be met through the collection of pressure/temperature data within and above the storage formation, the collection of groundwater and fluid samples from shallow and deep monitoring wells, wireline logging techniques, pressure/temperature measurements in the tubing and annular space of the injection well and deep monitoring wells, sample collection/analysis of the injection stream, and geophysical monitoring.

This QASP was developed to ensure the quality standards of the Testing and Monitoring Plan to meet the requirements of the EPA Underground Injection Control (UIC) Program for Class VI wells.

A.2.2 Reasons for Initiating the Project

The objective of the Marquis BioCarbon Project is to safely and permanently store injected CO₂ in the Mt. Simon Sandstone. The Testing and Monitoring Plan for this project has been designed to confirm the safe and permanent storage of the CO₂ within the intended storage reservoir.

A.2.3 Regulatory Information, Applicable Criteria, Action Limits

US EPA regulation 40 CFR 146 Subpart H requires owners or operators of Class VI wells to monitor several parameters over the life of the project to ensure that:

- Mechanical integrity of the injection well is maintained;
- Fluid migration and the extent of pressure elevation are within the limits described in the permit application; and
- USDWs are not endangered.

Monitoring activities include mechanical integrity tests (MITs), pressure fall-off (PFO) tests during the injection phase of the project, monitoring of shallow and deep groundwater quality, and development of the CO₂ plume and associated pressure front. This document details the measurements that will be required as well as the steps used to ensure that the quality of all data is such that it can be used in the decision-making process over the life of the project.

A.3. Project/Task Description

A.3.1 Summary of Work to be Performed and Work Schedule

Tables 7A-3 and 7A-4 provide a summary of the testing and monitoring tasks, purpose of those tasks, responsible parties, locations, and the testing frequency.

Activity	Location(s)	Method	Frequency			Analytical Technique	Lab/Custody	Purpose
			Baseline	Injection Phase	PISC Phase			
CO ₂ stream analysis	Post-Compressor	Direct sampling	N/A	Quarterly	None	Laboratory analysis	TBD	Monitor injectate
CO ₂ stream analysis, including N ₂ , H ₂ O and O ₂	CO ₂ Delivery Plant Piping to Wellhead	Confidential, Privileged, or Sensitive	N/A	Quarterly (Note 3)	None	Gas Chromatograph	N/A	Monitor gas stream
CO ₂ Injection mass rate	Post-Compressor	Coriolis Flow meter	N/A	Continuous	N/A	Direct measurement	N/A	Monitor injection rate
Injection pressure	Injection Wellhead	Pressure gauge	N/A	Continuous	N/A	Direct measurement	N/A	Monitor injection pressure
Injection temperature	Injection Wellhead	Temperature gauge	N/A	Continuous	N/A	Direct measurement	N/A	Monitor injection temperature
Down hole pressure/temperature monitoring (Note 1)	MCI CCS 3	Downhole transducer and thermocouple	Continuous from installation through CO ₂ injection	Continuous	N/A	Direct measurement	N/A	Monitor storage formation
Annular pressure	Wellhead Annulus Monitoring System (WAMS) Skid	Pressure gauge	N/A	Continuous	N/A	Direct measurement	N/A	Wellbore integrity – Annular fluid monitoring of differential pressure across the packing surface to downhole
Annulus Fluid Volume Added		Annulus Fluid Tank Level Indicator						

Activity	Location(s)	Method	Frequency			Analytical Technique	Lab/Custody	Purpose
			Baseline	Injection Phase	PISC Phase			
Annulus pressure	MCI MW 1, MCI MW 2, & MCI ACZ 1	Surface gauge	N/A	Weekly	Weekly while wells are open	Direct measurement	N/A	Wellbore integrity - Monitor annular pressure between casing and tubing string
Down hole pressure/temperature	MCI MW 2 & MCI ACZ 1	Downhole gauge	N/A	Continuous	Continuous while wells are open	Direct measurement	N/A	Monitor storage and ACZ formations
Wellbore Temperature Profile (storage formation) (Distributed Temperature Sensing) (DTS Fiber Optic System	MCI CCS 3, MCI MW 1, and MCI MW 2 – within the cement behind the borehole casing from the surface to downhole	<small>Confidential, Privileged, or Sensitive</small> [REDACTED]	Once	Annually	N/A	Direct measurement	N/A	Monitor storage formation – <small>Confidential, Privileged</small> [REDACTED]
Corrosion monitoring	Pipe	Coupon	N/A	Quarterly	N/A	Chemical analysis	TBD	Wellbore integrity
	MCI CCS 3	Multi-Finger Caliper Logging or Ultrasonic Casing Evaluation Tool	N/A	Every 6 years after beginning of injection	Every 6 years through end of post-closure period	Downhole Direct measurement	TBD	<u>25Cr</u> Casing and tubing corrosion (integrity)
	MCI CCS 3	Logging	Once	N/A	N/A	Direct measurement	N/A	CO ₂ plume development/baseline

Activity	Location(s)	Method	Frequency			Analytical Technique	Lab/Custody	Purpose
			Baseline	Injection Phase	PISC Phase			
Pulsed Neutron Capture	MCI MW 2 & ACZ 1	Logging	Once	Annually	Annually while wells are open	Direct measurement	N/A	CO ₂ plume development, well Integrity
Pressure fall-off testing	Injection Well (MCI CCS3)	Pressure gauge	Once	Every 5 years	N/A	Direct measurement	N/A	Reservoir evaluation
Microseismic monitoring	Surface monitoring stations	Seismometer stations	Continuous starting 4-6 months prior to injection	Continuous	Continuous	Indirect measurement	N/A	Pressure plume development, confining zone integrity
Time-Lapse 3D Surface Seismic data	Surface	Geophones and seismic sources	Once	Every 5 years or 4 Million Tonnes of Injection, whichever occurs first (Note 2)	Year 5, Year 10 (Note 2)	Indirect measurement	N/A	CO ₂ plume development, verify containment

Notes:

(1) **Confidential, Privileged, or Sensitive Business Information**

(2) A seismic survey will be conducted no more than 1 year prior to shutting down the injection well and prior to entering post-closure care.

(3) After initial startup of the well and during the first quarter, continuous CO₂ stream analysis will be conducted by a dedicated real time Gas Chromatograph (GC). After the first quarter, continuous analysis will be collected by the GC for a 7-day period each quarter during the injection phase.

Table 7A-3: Summary of testing and monitoring.

Section 7.A – Quality Assurance & Surveillance Plan

Revised Submission Date: November 2024

Level	Location(s)	Method	Frequency			Analytical Technique	Lab/Custody	Purpose
			Baseline	Injection Phase	PISC Phase			
Shallow groundwater monitoring & Isotope analysis - (Quaternary)	MCI GW 1 thru MCI GW 5	Dedicated Pump	Quarterly	Semi-Annually	Annually	Laboratory analyses	Table 7A-5: Summary of analytical and field parameters for shallow Quaternary Groundwater Samples.	Detection of changes in groundwater quality for a shallow USDW
Fluid sampling & Isotope analysis - Deepest USDW (Gunter Sandstone)	MCI ACZ 1	Bailer	Semi-Annually (Note 2)	Semi-Annually	Annually	Laboratory analyses	Table 7A-6: Summary of laboratory analytical and field parameters for the deepest USDW, Galesville Sandstone, and Mt. Simon Sandstone groundwater samples.	Detection of changes in quality in the deepest USDW compared to baseline

Section 7.A – Quality Assurance & Surveillance Plan

Revised Submission Date: November 2024

Level	Location(s)	Method	Frequency			Analytical Technique	Lab/Custody	Purpose
			Baseline	Injection Phase	PISC Phase			
Fluid sampling & Isotope analysis – (Galesville Sandstone)	MCI ACZ 1	Bailer	Semi-Annually ⁽²⁾	Semi-Annually	Annually	Laboratory analyses	Table 7A-6: Summary of laboratory analytical and field parameters for the deepest USDW, Galesville Sandstone, and Mt. Simon Sandstone groundwater samples.	Detection of changes in quality in the ACZ aquifer compared to baseline.
In-zone monitoring Fluid sampling & Isotope analysis - (Mt. Simon Sandstone) (Note 1)	MCI MW 2	Bailer	Semi-Annually (Note 2)	Semi-Annually	None	Laboratory analyses	Table 7A-6: Summary of laboratory analytical and field parameters for the deepest USDW, Galesville Sandstone, and Mt. Simon Sandstone groundwater samples.	Detection of changes in quality, geochemistry and CO ₂ detection in storage formation compared to baseline

Level	Location(s)	Method	Frequency			Analytical Technique	Lab/Custody	Purpose			
			Baseline	Injection Phase	PISC Phase						
Notes:											
(1)	Confidential, Privileged, or Sensitive Business Information					Sampling frequency may be adjusted once model is updated post drilling to try and detect CO ₂ fluid mixing front as it passes by the well.					
(2)	For establishing baseline, sampling of the deep wells will occur during well drilling and prior to start of injection.										

Table 7A-4: Summary of direct geochemical measurements.

A.3.2 Geographic Location

Figure 7A-2 identifies the Marquis BioCarbon Project site and monitoring infrastructure.

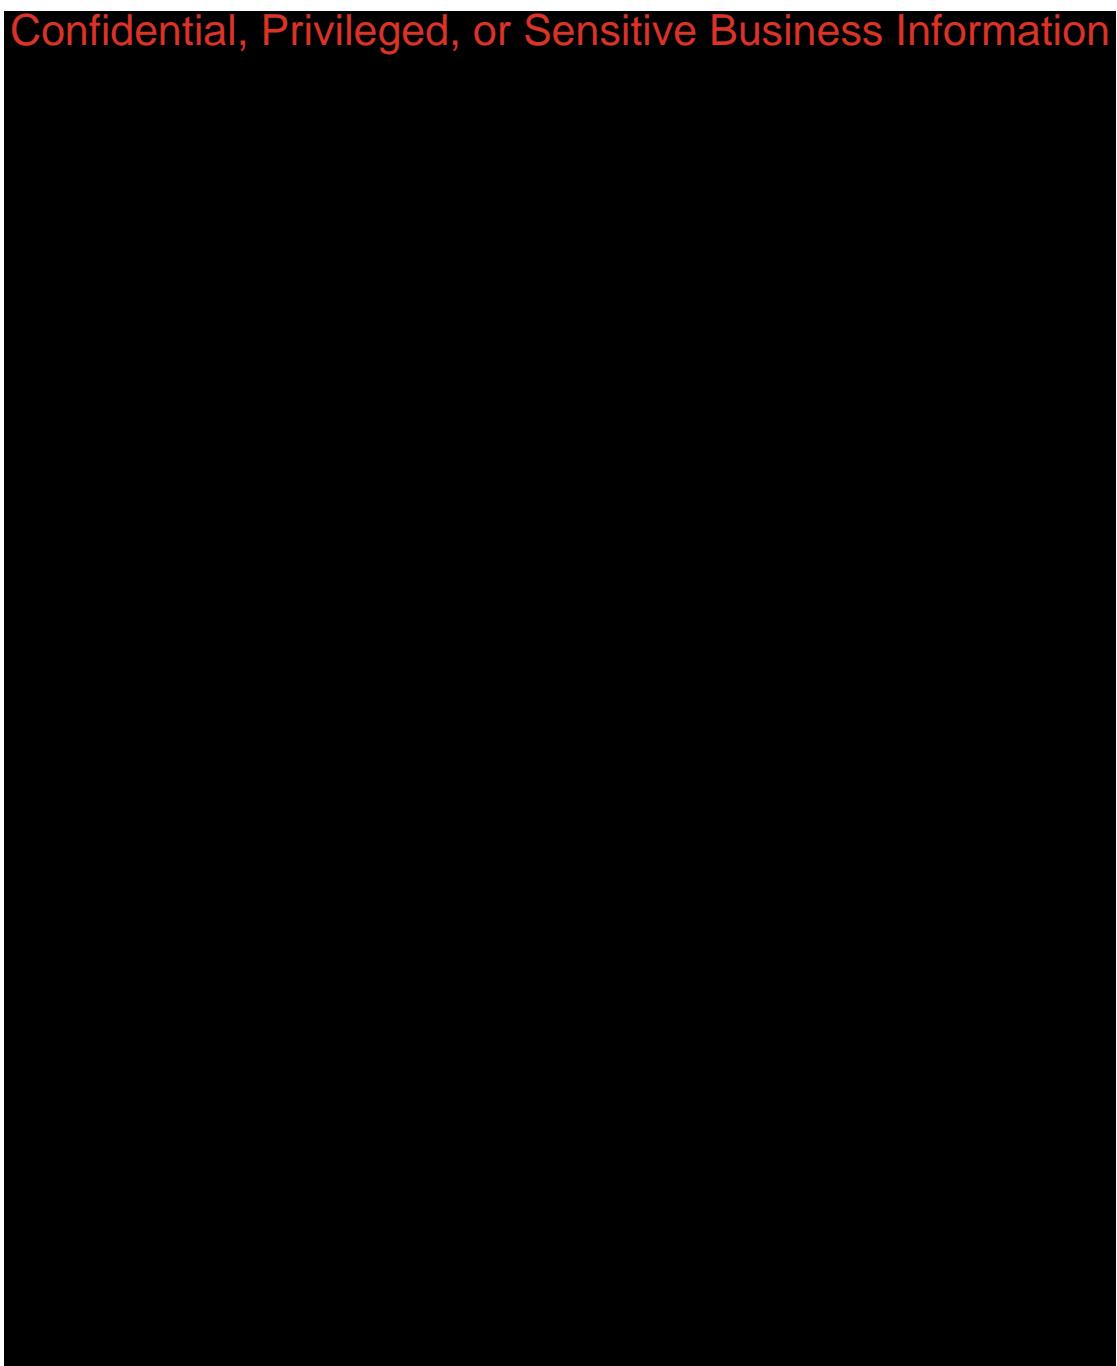


Figure 7A-2: Marquis Carbon Injection Project area showing location of the injection, deep, above confining zone (ACZ), and shallow groundwater monitoring wells.

A.3.3 Resource and Time Constraints

MCI proposes a 12-year post injection site care (PISC) phase and will continue PISC monitoring for 12 years. See Permit **Section 2.2.2** that details current modeling results on plume stability.

Computer Modelling Group (CMG-GEM) simulations will be run throughout the project and matched with actual field data collected under the Testing and Monitoring Plan. The simulations and field testing will confirm that plume stability modeling will be accurate beyond the 12-year period. However, no resource and time constraints have been identified for the Testing and Monitoring Plan beyond the 12-year PISC funding levels.

A.4. Quality Objectives and Criteria

A.4.1 Performance/Measurement Criteria

The overall quality assurance (QA) objective for the testing and monitoring plan is to develop and implement procedures to monitor the CO₂ injection system, development of the CO₂ plume and associated pressure front, and to confirm that CO₂ or other fluids have not migrated beyond the confining layer. This objective will be accomplished through the implementation of the methods provided in **Tables 7A-3** and **7A-4** (Summary of Direct Geochemical Measurements). The Tables below (**Tables 7A-5** to **Table 7A-15**) detail the specific performance and measurement criteria for each testing and monitoring output.

Section 7.A – Quality Assurance & Surveillance Plan

Revised Submission Date: November 2024

Parameters	Analytical Methods (Notes 1-5)	Detection Limit/Range	Typical Precisions	QC Requirements
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	Confidential, Privileged, or Sensitive Business Information
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]

Notes:

Confidential, Privileged, or Sensitive Business Information

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

Table 7A-5: Summary of analytical and field parameters for shallow Quaternary Groundwater Samples.

Table 7A-6: Summary of laboratory analytical and field parameters for the deepest USDW, Galesville Sandstone, and Mt. Simon Sandstone groundwater samples.

Table 7A-7: Summary of analytical parameters for CO₂ gas stream.

Parameters	Analytical Methods	Detection Limit/Range	Typical Precisions	QC Requirements
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	Confidential, Privileged, or Sensitive Business Information
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]

Table 7A-8: Summary of analytical parameters for corrosion coupons.

Parameters	Detection Limit/Range
[REDACTED]	Confidential, Privileged, or Sensitive Business Information
[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]

Table 7A-9: Mass Flow Rate Field Gauge— CO₂ Mass Flow Rate.

Parameters	Methods	Detection Limit/Range	Typical Precisions	QC Requirements
Confidential, Privileged, or Sensitive Business Information	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]

Parameters	Methods	Detection Limit/Range	Typical Precisions	QC Requirements
[REDACTED]	[REDACTED]	[REDACTED] Confidential, Privileged, or Sensitive Business Information	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]

Table 7A-10: Summary of measurement parameters for field gauges.

Parameters	Detection Limit/Range
[REDACTED] Confidential, Privileged, or Sensitive Business Information	[REDACTED]
[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]

Table 7A-11: Pressure Field Gauge —Injection tubing, annulus, pipeline.

Parameters	Detection Limit/Range
Confidential, Privileged, or Sensitive Business Information	[REDACTED]
[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]

Table 7A-12: Temperature Field Gauge —Injection tubing, annulus, pipeline.

Parameters	Detection Limit/Range
Confidential, Privileged, or Sensitive Business Information	[REDACTED]
[REDACTED]	[REDACTED]

Table 7A-13: Pressure and temperature—bottomhole gauge specifications (PPS25).

Table 7A-15 presents the monitoring methods that will require additional testing or monitoring if exceedances or variances are observed. In the table, the routine measurement method is followed by the additional monitoring that would occur if an exceedance were measured.

Method	PNC	CBL	USI	Isolation Scanner
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	Confidential, Privileged, or Sensitive Business Information
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]

Method	PNC	CBL	USI	Isolation Scanner
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]

Table 7A-14: Representative logging tool specifications. Actual tools used will be comparable.

Activity or Parameter	Project Action Limit	Detection Limit	Anticipated Reading
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]
[REDACTED]	[REDACTED]	[REDACTED]	[REDACTED]

Table 7A-15: Actionable testing and monitoring outputs.

A.4.2 Precision

The specification and precision of each monitoring method is detailed in the tables above. For groundwater sampling, the accuracy of the data will be assessed by the collection and analysis of field blanks to test sampling procedures and matrix spikes to test lab procedures. Field blanks will be taken no less than one per sampling event to determine if the sample bottle is contaminated. Laboratory assessment of analytical precision will be the responsibility of the individual laboratories per their standard operating procedures.

A.4.3 Bias

Laboratory assessment of analytical bias will be the responsibility of the individual laboratories per their standard operating procedures (SOPs) and analytical methodologies. For direct pressure or logging measurements, there is no bias.

A.4.4 Representativeness

For groundwater sampling, data representativeness expresses the degree to which data accurately and precisely represent a characteristic of a population, parameter variations at a sampling point, a process condition, or an environmental condition. The sampling network has been designed to provide data that are representative of site conditions. For the analytical results of individual groundwater samples, representativeness will be estimated by ion charge and mass balances. Ion balances Confidential, Privileged, or Sensitive Business Information will be considered valid. Mass balance assessment will be used in cases where the ion balance is Confidential, Privileged, or Sensitive Business Information determine the source of error. For a sample and its duplicate, if the relative percent difference (Confidential, Privileged, or Sensitive Business Information) the sample may be considered non-representative.

A.4.5 Completeness

For groundwater sampling, data completeness is a measure of the amount of valid data obtained from a measurement system compared to the amount that was expected to be obtained under normal conditions. Confidential, Privileged, or Sensitive Business Information

A.4.6 Comparability

Data comparability expresses the confidence with which one data set can be compared to another. The data sets to be generated by this project will be very comparable to future data sets because of the use of standard methods and the level of quality assurance/quality control (QA/QC) effort. Direct pressure, temperature, and logging measurements will be directly comparable to previously obtained baseline data sets or project data.

A.5. Special Training/Certifications

A.5.1 Specialized Training and Certifications

The geophysical survey equipment and wireline logging tools will be operated by trained, qualified, and certified personnel, according to the service company which provides the equipment. The subsequent data will be processed and analyzed according to industry standards. Examples of these are shown in **Attachment 1**.

No specialized certifications are required for personnel conducting groundwater sampling, but field sampling will be conducted by trained personnel. Groundwater sampling will be conducted by personnel trained to understand and follow the project-specific sampling procedures.

Upon request, the Agency will be provided with all laboratory SOPs developed for the specific parameter using the appropriate standard method. Each laboratory technician conducting the analysis on the in-house samples will be trained on the SOP developed for each standard method. The technician's training certification will be included with the biannual report. Certifications will not be included for technicians conducting sample analysis from an accredited laboratory. Laboratory accreditation information will be provided upon request.

A.5.2 Training Provider and Responsibility

Training for personnel will be provided by the operator or by the subcontractor responsible for the data collection activity.

A.6. Documentation and Records

A.6.1 Report Format and Package Information

A semi-annual report from Marquis Carbon Injection LLC to EPA will contain all required project data, including the testing and monitoring information as specified by the UIC Class VI permit. Data will be provided in electronic or other formats as required by the UIC Program Director.

A.6.2 Other Project Documents, Records, and Electronic Files

Other documents, records, and electronic files such as well logs, test results, or other data will be provided as required by the UIC Program Director.

A.6.3 Data Storage and Duration

Maquis Carbon Injection LLC or a designated contractor will maintain the required project data as provided elsewhere in the permit.

A.6.4 QASP Distribution Responsibility

The Marquis Carbon Injection LLC Manager will be responsible for ensuring that all those on

the distribution list will receive the most current copy of the approved QASP.

B. Data Generation and Acquisition

B.1. Sampling Process Design (Pre-Injection Phase)

During the pre-injection phase, fluid samples will be collected and analyzed for geochemical parameters listed in **Table 7A-5** and **Table 7A-6** to establish baseline conditions of the fluids within the target formations. Regular sampling will be performed during the injection and post-injection phases of the project to track the migration of CO₂ through the storage formation and to confirm that CO₂ and other fluids of interest have not migrated out of the storage formation.

Analytes will include selected constituents that are:

- Primary and secondary EPA drinking water contaminants.
- Those most responsive in the interaction of CO₂ with the formation fluids and minerals; and
- Those needed for Quality Control.

The full set of selected parameters for each sampling interval is given in **Table 7A-5** (Summary of analytical and field parameters for shallow Quaternary Groundwater Samples) and **Table 7A-6**

Confidential, Privileged, or Sensitive Business Information

All samples will be analyzed using a laboratory that meets the requirements under the EPA Environmental Laboratory Accreditation Program. Isotopic analysis will be conducted using established methods. The pressure, temperature, and flowrate of the CO₂ injection stream will be monitored on a continuous basis using instrumentation located in the flowline between the final compression stage and the wellhead. In addition, samples of the injection stream will be collected on a quarterly basis for analysis. The sampling and analysis will be completed to ensure compliance with the approved Class VI permit.

B.1.1 Design Strategy

CO₂ Stream Monitoring Strategy

Confidential, Privileged, or Sensitive Business Information regular sampling of the CO₂ stream provides an evaluation of the potential interactions of the CO₂ and other constituents of the injection stream with mineral components and fluids within the storage formation. It can also identify increases in trace components, such as water content, that could accelerate well corrosion and negatively impact well integrity. Minor variation Confidential, Privileged, or Sensitive Business Information is expected in the composition of the injected CO₂ stream which will pass through at least one scrubber prior to entering the compressor and the pipeline. As a result, Confidential, Privileged, or Sensitive Business Information stream will be


sufficient to accurately track the composition of the stream. An initial calibration and validation of the instruments will be performed by the manufacturers and will be verified by the project on a regular basis.

Corrosion Monitoring Strategy

Corrosion coupon analyses will be conducted quarterly to assess the mechanical integrity of the well components that are in contact with the CO₂. The coupons will be assessed for signs of corrosion and any loss of mass thickness, cracking, pitting, and other signs of corrosion that could be indicative of future well integrity issues. **Confidential, Privileged, or Sensitive Business Information**



Confidential, Privileged, or Sensitive Business Information

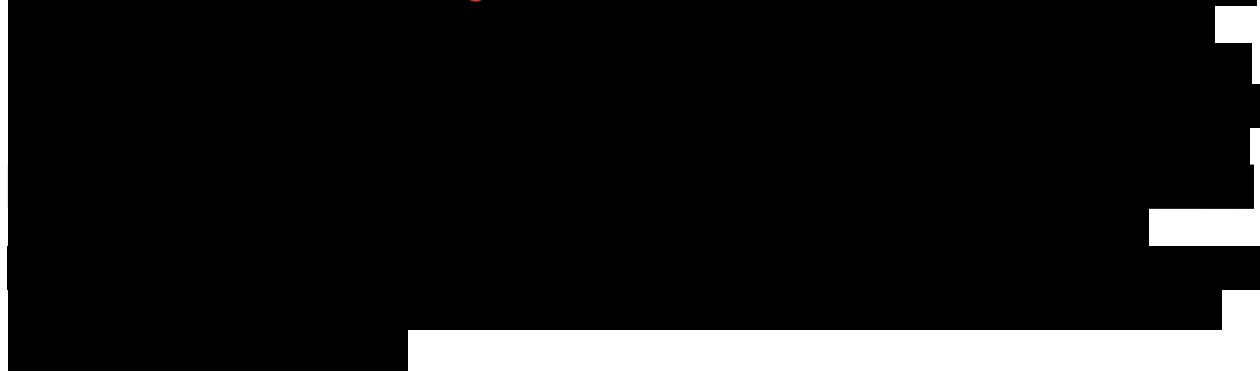

Shallow Groundwater Monitoring Strategy

Five dedicated shallow groundwater wells in the AoR will be used for shallow groundwater monitoring (**Figure 7A-2**). **Confidential, Privileged, or Sensitive Business Information**

which is deeper than any drinking water well in the area.

Baseline groundwater samples will be acquired from these wells at a minimum of once per quarter to obtain baseline data for the water quality within the AoR prior to the start of CO₂ injection. These groundwater samples will also have their geochemistry and stable isotopes analyzed by a qualified laboratory. Throughout the injection and PISC phases of the project, the results of the aqueous geochemistry and isotope analyses will be compared to the baseline conditions for any indication of CO₂ or brine migration into the shallow groundwater aquifer.

Deep Groundwater Monitoring Strategy

A deep, above confining zone (ACZ 1) groundwater well will be drilled for the project (40 CFR 146.90 (d)). MCI ACZ 1 will be near the injection well to monitor the aquifers immediately above the confining layer in the event that there is CO₂ or brine migration out of the storage formation along the injection wellbore (**Figure 7A-2**). This well will allow for pressure and temperature monitoring as well as periodic fluid sampling in the Galesville Sandstone and Gunter Sandstone, the deepest USDW. The well will be equipped with continuous pressure and

temperature gauges. A bailer system will be used to collect the fluid samples to evaluate geochemical changes in groundwater fluids. Samples will be analyzed for field constituents using a calibrated water quality meter Confidential, Privileged, or Sensitive Business Information. The geochemical analyses will be performed by a qualified laboratory. The isotopic analyses will be performed by a qualified laboratory.

Confidential, Privileged, or Sensitive Business Information

Confidential, Privileged, or Sensitive Business Information The presence of CO₂ or brine in the overlying aquifers can be further confirmed through aqueous geochemistry data and analysis of isotopes. If deep early-detection monitoring data indicate that CO₂ has migrated out of the primary storage formation, it will trigger external well integrity testing of the injection and deep monitoring wells. It may also trigger a time-lapse three-dimensional (3D) surface seismic survey earlier than initially planned.

Storage Formation Monitoring Strategy

The storage formation will be monitored through pressure and temperature sensors, fluid sampling and analysis, pulsed neutron capture (PNC) logging, time-lapse 3D surface seismic data, and microseismic monitoring to characterize the development of the CO₂ and pressure plumes over the injection and PISC phases of the project. Fluid samples will be collected from the deep monitor well on a biannual basis until the well becomes saturated with CO₂, while the pressure/temperature gauges will be retrieved for data download. PNC logging will be used to determine the CO₂ saturation adjacent to the deep monitoring well. The PNC logging will also confirm that CO₂ has not migrated above the confining layer.

Deep Monitoring Well (MCI MW 2) Sampling Strategy

The deep monitoring well (MCI MW 2) will be used to monitor the pressure and CO₂ plume development in the storage formation through the injection phase of the project. Fluid samples will be collected on a semi-annual basis from the Mt. Simon Sandstone to monitor aqueous geochemistry changes within the formation. The well will be swabbed to produce representative formation fluid in the well. During the swabbing process, the swab water will be analyzed in the field using a calibrated water quality meter Confidential, Privileged, or Sensitive Business Information. After swabbing the well, fluid samples will be collected using a bailer-style system. Samples will be analyzed for constituents that can be used to measure changes in chemistry that would be caused by interaction with the injected CO₂. See Table 7A-6 for list of analytes. Analysis will be conducted by an accredited laboratory. For example, Isotech or a similar laboratory will perform the isotopic analyses. A set of memory-style pressure and temperature gauges Confidential, Privileged, or Sensitive Business Information will also be placed in the deep monitoring well to track the pressure response due to CO₂ injection. These gauges will be programmed to collect data every 60 seconds.

Deep Monitoring Well (MCI MW 1) Sampling Strategy

This deep well will be used for extended field monitoring. It will be used as a contingency in the monitoring plan. Should the need arise for cross-well measurements or downhole measurements, like Vertical Seismic Profile (VSP), this well will be employed as an additional data point to confirm pressure front or CO₂ plume movement.

B.1.2 Type and Number of Samples/Test Runs

The types, frequencies, and additional details of the sampling and monitoring methods are provided in (**Table 7A-3**) of this document.

B.1.3 Site/Sampling Locations

Five shallow groundwater wells (MCI GW 1-5), a deep groundwater monitoring well (MCI MW 2), and a monitoring well above the confining zone (MCI ACZ 1) will be installed and geochemical and isotope analysis will be conducted. See **Figure 7A-2** and **Table 7A-2**.

The chemical composition, pressure and temperature, and mass flowrates of the CO₂ injection stream will be monitored downstream of the last stage of compression and upstream of the injection well. At the injection well, the wellhead and storage formation pressure and temperature will be measured along with the annular pressure and volume. In addition, corrosion monitoring will be completed in the CO₂ pipe between the compressor and the injection well.

PNC logging will be performed in the ACZ 1 well and the deep monitoring well (MCI MW 2) to monitor the CO₂ plume development in the storage formation as well as for potential migration of CO₂ above the confining layer. Temperature measurements will be acquired in the injection and wells (MCI ACZ 1 and MCI MW 2) on an annual basis to confirm external mechanical integrity.

B.1.4 Sampling Site Contingency

The shallow groundwater, MCI ACZ 1, and deep monitoring wells (MCI MW 1 and MCI MW 2) are all located on Marquis property where the Marquis BioCarbon Project is located. Access to the wells is not anticipated to be a problem over the course of the project. The wells are all located on flat farmland, accessible, and not on any rough terrain. If inclement weather makes site access difficult, sampling schedules will be reviewed, and alternative dates may be selected that would still meet permit-related conditions.

B.1.5 Activity Schedule

Table 7A-3 provides the schedules for the sampling and monitoring activities along with other pertinent details regarding the techniques.

B.1.6 Critical/Informational Data

During data acquisition for the testing and monitoring activities, field and laboratory information will be documented in detail. Information will be recorded in field and laboratory forms and notebooks. Critical information will include the time and date of activity, person(s) performing activity, location of the activity or instrument, field or laboratory instrument calibration data, and field parameter values. For laboratory analyses, much of the critical data will be generated during the analysis and provided to the project in digital and printed formats. Noncritical data may include the appearance and problems with the wells or sampling/monitoring equipment, and weather conditions.

B.1.7 Sources of Variability

Potential sources of variability related to monitoring activities include:

- Confidential, Privileged, or Sensitive Business Information



Activities to eliminate, reduce, or reconcile variability related to monitoring activities include:

- Confidential, Privileged, or Sensitive Business Information



- Confidential, Privileged, or Sensitive Business Information

B.2. Sampling Methods

Well logging, geophysical monitoring, and pressure/temperature monitoring do not apply to this section.

B.2.1 Sampling SOPs

B.2.1.1 Shallow Groundwater Wells

Groundwater samples will be collected from the shallow groundwater wells using a low-flow sampling method consistent with ASTM D6452-99 (2005) or Puls and Barcelona (1996). If a flow-through cell is not used, field parameters will be measured in grab samples. Groundwater wells will be purged to ensure samples are representative of formation water quality. Static water levels in each well will be determined using an electronic water level indicator before any purging or sampling activities begin. Dedicated pumps (e.g., bladder pumps) will be installed in each monitoring well to minimize potential cross contamination between wells. The pH, temperature, specific conductance, and dissolved oxygen of the purge water will be monitored in the field using portable probes and a flow-through cell consistent with standard methods given sufficient flow rates and volumes. Field chemistry probes will be calibrated at the beginning of each sampling day according to equipment manufacturer procedures using standard reference solutions. When a flow-through cell is used, field parameters will be continuously monitored and will be considered stable when three successive measurements made three minutes apart meet the criteria listed in **Table 7A-16**.

Field Parameter	Stabilization Criteria
Confidential, Privileged, or Sensitive Business Information	

Table 7A-16: Stabilization criteria of water quality parameters during shallow well purging

Confidential, Privileged, or Sensitive Business Information

B.2.1.2 Deep Monitoring Wells and ACZ 1 Well

Samples will be collected from the MCI ACZ 1 and deep monitoring well MCI MW2 using a bailer system lowered into the wells via slickline. Prior to sample collection, the well will be purged by swabbing the well to remove stagnant fluids and to ensure representative formation fluids are present in the well. During drilling of the wells, extensive infiltration of drilling fluids during construction and development activities will occur. Therefore, prior to sampling, each discrete zone interval where samples are being collected will be purged to ensure the samples are representative of site conditions. The pH, temperature, specific conductance, and dissolved oxygen of the swabbed water will be monitored every swab run in the field using portable probes until the parameters stabilize for three successive runs, and grab samples will be used to collect the samples. Field chemistry probes will be calibrated at the beginning of each sampling day according to equipment manufacturer procedures using standard reference solutions.

After the well has been swabbed, the bailer system will be lowered into the well to collect sufficient volume of the fluid to complete the analyses. The samples will be transferred to the appropriate bottles for each analytical method. Samples that require filtering will be filtered through a 0.45 µm cartridge filter per the procedure.

B.2.1.3. CO₂ Gas Stream

For the CO₂ stream, samples will be collected from a sampling port [REDACTED] Confidential, Privileged, or Sensitive Business Information where the injectate is representative of the stream being injected into the well. The samples will be collected in Department of Transportation (DOT)-rated pressure cylinders that can be sent to an accredited analytical laboratory for analysis. A pressure regulator will reduce the pressure of the CO₂ to [REDACTED] Confidential, Privileged, or Sensitive Business Information so that the CO₂ is in the gaseous state when collected rather than a super-critical liquid. Cylinders will be purged with sample gas (i.e., CO₂) at least five times prior to sample collection to remove laboratory-added helium gas and ensure a representative sample. During purging, the outlet of the sample cylinder will be connected to a ventilation line and vented to the atmosphere. Appropriate sampling technique is critical for any gas analysis program. Therefore, great care will be taken to ensure that the cylinder is not contaminated by atmospheric gas, and the sample is representative of the CO₂ in the pipeline.

B.2.2 In-Situ Monitoring

In-situ monitoring of groundwater chemistry is not currently planned.

B.2.3 Continuous Monitoring

The pressure and temperature in the deep monitoring wells will be continuously monitored using downhole pressure/temperature gauges.

B.2.4 Sample Homogenization, Composition, Filtration

Sample homogenization, composition, and filtrations is described in **Section B.2.1**.

B.2.5 Sample Containers and Volumes

For CO₂ stream monitoring, samples will be collected in a clean sample cylinder rated for the appropriate collection pressure provided by a laboratory such as Confidential, Privileged, or Sensitive Business Information

CO₂ quarterly gas analysis will include:

- CO₂ Purity (% volume [v]/v, gas chromatograph [GC])
- Oxygen (O₂, parts per million [ppm] v/v)
- Nitrogen (N₂, ppm v/v)
- Hydrogen Sulfide (H₂S ppm v/v)
- Potential Trace Contaminants – See Table 7A-7

For shallow and deep fluid samples, all sample bottles will be new. Sample bottles for analytes will be used as received from the vendor or contract analytical laboratory for the analyte of interest. A summary of sample containers is presented in **Table 7A-17** (Preservation, Containers, and Holding Times for Aqueous Samples).

B.2.6 Sample Preservation

For groundwater and other aqueous samples, the preservation methods provided in **Table 7A-17** will be used.

Table 7A-17: Preservation, containers, and hold times for aqueous samples.

No preservation will be required for the CO₂ injection stream samples, additional details for the gas sampling are provided in Table 7A-7 and Table 7A-18..

Target Parameters	Volume/Container Material	Preservation Technique	Sample Holding time(max)
CO ₂ gas stream	Confidential, Privileged, or Sensitive Business Information	[REDACTED]	[REDACTED]

Table 7A-18: Preservation, containers, and hold times for aqueous samples.

Corrosion coupon sampling requires that the coupons be physically separated (e.g., sleeves, baggies) during transportation to prevent physical abrasion.

B.2.7 Cleaning/Decontamination of Sampling Equipment

Dedicated pumps (e.g., bladder pumps) will be installed in each shallow groundwater monitoring well to minimize potential cross contamination between wells. These pumps will remain in each well throughout the project period except for maintenance. Prior to installation,

the pumps will be cleaned on the outside with a non-phosphate detergent. Pumps will be rinsed a minimum of three times with deionized water and a minimum of 1 liter (L) of deionized water will be pumped through the pump and sample tubing. Individual cleaned pumps and tubing will be placed in plastic bags for transport to the field for installation. All field glassware (pipets, beakers, filter holders, etc.) will be cleaned with tap water to remove any loose dirt and rinsed three times with deionized water before use. CO₂ gas stream sampling cylinders will be decontaminated by the analytical lab, and no sampling equipment will be utilized with the corrosion coupons or annual field gauge calibrations.

B.2.8 Support Facilities

Field activities are usually completed in mobile laboratory vehicles or trailers located on site. Fluid sampling may require the use of an air compressor, vacuum pump, generator, filters, and analytical meters (pH, specific conductance, etc.). Sample tubing, connectors and valves required to sample the CO₂ gas stream will be supplied by the analytical lab providing the sampling containers. Sampling will occur within the CO₂ compression building or at the wellsite building prior to injection. Similarly, corrosion coupons will be removed from the CO₂ injection line.

B.2.9 Corrective Action, Personnel, and Documentation

Field staff will be responsible for testing equipment and performing corrective actions on broken or malfunctioning field equipment. If corrective action cannot be taken in the field, then equipment will be returned to the manufacturer for repair or replacement. Significant corrective actions that occur during the sampling and data collection activities that affect analytical results will be documented in field notes.

B.3. Sample Handling and Custody

Well logging, geophysical monitoring, and pressure and temperature monitoring do not apply to this section and are omitted.

Sample holding times will be consistent with standard methods. After collection and any necessary preservation, samples will be placed in ice chests in the field and maintained thereafter at approximately 4 degrees Celsius (°C) until analysis. The samples will be maintained at their preservation temperature and sent to the designated laboratory within 24 hours. Analysis of the samples will be completed within the holding time listed in **Table 7A-17**. See **Table 7A-17** (Preservation, Containers and Hold Times for Aqueous Samples).

As appropriate, alternative sample containers and preservation techniques approved by the UIC Program Director will be used to meet analytical requirements.

B.3.1 Maximum Hold Time/Time Before Retrieval

See **Table 7A-17** (Preservation, Containers and Hold Times for Aqueous Samples).

B.3.2 Sample Transportation

See description in **Section B.2**.

B.3.3 Sampling Documentation

Field notes will be collected for all groundwater samples collected. These forms will be retained and archived as reference. The sample documentation is the responsibility of groundwater sampling personnel. A chain-of-custody form will be provided with each CO₂ gas stream sample or fluid sample provided for analysis as shown in **Figure 7A-4** (Example of chain-of-custody form for the CO₂ injection stream gas analysis).

B.3.4 Sample Identification

All sample bottles will have waterproof labels with information denoting project, sampling date, sampling location, sample identification number, fluid sample, sample type, analyte, volume, filtration used (if any), and preservative used (if any). See **Figure 7A-3**: (Example label for groundwater sample bottles)

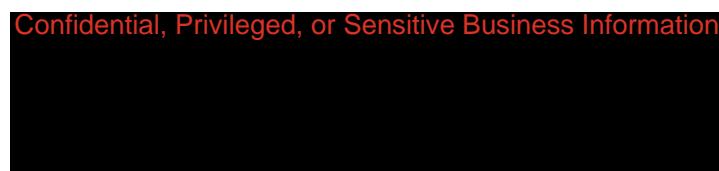


Figure 7A-3: Example label for groundwater sample bottles.

B.3.5 Sample Chain-of-Custody

For CO₂ stream analysis, a chain-of-custody form will accompany the sample to the laboratory. An example of the form is provided in **Figure 7A-4**. The chain-of-custody form will include sample identification (ID), sample collection date/time, sample pressure, and analytical requirements. A chain-of-custody form will accompany the sample through the analytical process. Copies of the chain-of-custody forms will be retained in the monitoring files.

For groundwater samples, the chain-of-custody will be documented using a standardized form. A typical form is shown in **Figure 7A-5** (Example chain-of-custody form for the fluid sample analysis). Copies of the chain-of-custody forms will be provided to the person or lab receiving the samples as well as the person or lab transferring the samples. These forms will be retained and archived to allow simplified tracking of sample status. The chain-of-custody form and record keeping is the responsibility of groundwater sampling personnel.

B.4. Analytical Methods

Well logging, geophysical monitoring, and pressure and temperature monitoring do not apply to this section and are omitted.

B.4.1 Analytical SOPs

Analytical methods are referenced in **Table 7A-5** (Summary of analytical and field parameters for shallow Quaternary Samples) and **Table 7A-6** (Summary of laboratory analytical and field parameters for deepest **Confidential, Privileged, or Sensitive Business Information** [REDACTED]). Upon request, Marquis Carbon Injection LLC will provide the EPA with all laboratory SOPs developed for the specific parameter using the appropriate standard method.

B.4.2 Equipment/Instrumentation Needed

Equipment and instrumentation are specified in the individual analytical methods referenced in **Table 7A-5** (Summary of analytical and field parameters for shallow Quaternary Groundwater Samples) and **Table 7A-6** (Summary of analytical and field parameters for the deepest USDW, **Confidential, Privileged, or Sensitive Business Information**).

B.4.3 Method Performance Criteria

Nonstandard method performance criteria are not anticipated for this project.

B.4.4 Analytical Failure

Each laboratory conducting the analyses in **Table 7A-5** through **7A-8** will be responsible for appropriately addressing analytical failure according to their individual SOPs.

B.4.5 Sample Disposal

Each laboratory conducting the analyses in **Table 7A-5** through **7A-6** will be responsible for appropriate sample disposal according to their individual SOPs.

B.4.6 Laboratory Turnaround

Laboratory turnaround will vary by laboratory, but generally turnaround of verified analytical results within one month will be suitable for project needs.

B.4.7 Method Validation for Nonstandard Methods

Nonstandard methods are not anticipated for this project.

Confidential, Privileged, or Sensitive Business Information

Figure 7A-4: Example of chain-of-custody form for the CO₂ injection stream gas analyses.

Confidential, Privileged, or Sensitive Business Information



Figure 7A-5: Example chain-of-custody form for the fluid sample analyses.

B.5. Quality Control

Geophysical monitoring and pressure/temperature monitoring do not apply to this section and are omitted. For wireline log QC, please refer to **Section 7A-Attachment 1**.

B.5.1 QC Activities

Blanks

For shallow and deep groundwater/brine sampling, a field blank will be collected and analyzed for the inorganic analytes in **Table 7A-5** and **7A-6** at a [Confidential, Privileged, or Sensitive Business Information]

[REDACTED] Field blanks will be exposed to the same field and transport conditions as the groundwater samples. Field blanks will be used to detect contamination resulting from the collection and transportation process.

No field blanks will be collected for the injection stream sampling. Contamination and representative sampling will be determined through the concentrations of nitrogen and helium (that have been spiked into the cylinder) in the sample.

Duplicates

For each fluid sampling round, at least one duplicate sample will be collected from a well. Duplicate samples will be collected from the same source immediately after the original sample in different sample containers and processed in the same manner as all other samples. Duplicate samples will be used to assess sample heterogeneity and analytical precision.

B.5.2 Exceeding Control Limits

If the sample analytical results exceed control limits (i.e., ion balances $> \pm 10\%$), further examination of the analytical results will be done by evaluating the ratio of the measured total dissolved solids (TDS) to the calculated TDS (i.e., mass balance) per the method. The method indicates which ion analyses should be considered suspect based on the mass balance ratio. Suspect ion analyses are then reviewed in the context of historical data and interlaboratory results. If available, suspect ion analyses will then be brought to the attention of the analytical laboratory for confirmation and/or reanalysis. The ion balance will be recalculated, and if the error is still not resolved, the suspect data will be identified and may be given less importance in data interpretations. Additional samples may be collected for repeat analyses to confirm the analytical results.

B.5.3 Calculating Applicable QC Statistics

Charge Balance

The analytical results will be evaluated to determine correctness of analyses based on the anion-cation charge balance calculation. Since fluid samples should be electrically neutral, the chemical analyses should yield equally negative and positive ionic activity. The anion-cation charge balance will be calculated using the formula:

$$\% \text{ difference} = 100 \frac{\sum \text{cations} - \sum \text{anions}}{\sum \text{cations} + \sum \text{anions}}, \quad (\text{Equation})$$

where the sums of the ions are represented in milliequivalents per liter and the criteria for acceptable charge balance is $\pm 10\%$.

Mass Balance

The ratio of the measured TDS to the calculated TDS will be calculated in instances where the charge balance acceptance criteria are exceeded using the formula:

$$\frac{\text{measured TDS}}{\text{calculated TDS}} < \frac{\text{Confidence}}{\text{Confidence}}, \quad (\text{Equation})$$

Confidential, Privileged, or Sensitive Business Information

Outliers

The determination of one or more statistical outliers is essential prior to the statistical evaluation of groundwater. This project will use the USEPA's Unified Guidance (March 2009) as a basis for selection of recommended statistical methods to identify outliers in water/brine chemistry data sets as appropriate. These techniques include Probability Plots, Box Plots, Dixon's test, and Rosner's test. The EPA-1989 outlier test may also be used as another screening tool to identify potential outliers.

B.6. Instrument/Equipment Testing, Inspection, and Maintenance

Logging tool equipment will be maintained as per wireline industry best practices (**Section 7A-Attachment 1**).

All pressure, temperature, and mass flow measurement equipment will be maintained per the manufacturer's specifications. Any necessary calibrations or repairs will also be performed per the manufacturer's specification or by the manufacturer of the equipment.

For fluid sampling, the field equipment will be maintained, factory serviced, and factory calibrated per manufacturer's recommendations. Spare parts that may be needed during sampling will be included in supplies on hand during field sampling.

For all laboratory equipment, testing, inspection, and maintenance will be the responsibility of the analytical laboratory per standard practice, method-specific protocol, or National Environmental Laboratory Accreditation Program (NELAP) requirement.

B.7. Instrument/Equipment Calibration and Frequency

Geophysical monitoring does not apply to this section and is omitted.

B.7.1 Calibration and Frequency of Calibration

Pressure and temperature gauge calibration information will be performed annually. Logging tool calibration will be at the discretion of the service company providing the equipment and following standard industry practices noted in **Section 7A-Attachment 1**.

Confidential, Privileged, or Sensitive Business Information

Recalibration will be performed if any components yield atypical values or fail to stabilize during sampling.

B.7.2 Calibration Methodology

Logging tool calibration methodology will follow standard industry practices in **Section 7A-Attachment 1**.

The pressure, temperature, and mass flow meters will be calibrated annually.

For groundwater sampling, standards used for calibration are typically 7 and 10 for pH, a potassium chloride solution yielding a value of 1413 microsiemens per centimeter ($\mu\text{S}/\text{cm}$) at 25°C for specific conductance, and a 100% dissolved O₂ solution for dissolved oxygen. Calibration is performed for the pH meters per manufacturer's specifications using a 2-point calibration bounding the range of the sample. For coulometry, sodium carbonate standards (typically yielding a concentration of 4,000 milligrams [mg] CO₂/L) are routinely analyzed to evaluate the instrument.

B.7.3 Calibration Resolution and Documentation

Logging tool calibration resolution and documentation will follow standard industry practices in **Section 7A-Attachment 1**.

Manufacturers of the pressure, temperature, and mass flow equipment will provide calibration certifications for their equipment. If calibration cannot be achieved with the equipment, this piece of equipment will be replaced with a new or calibrated piece of equipment.

For groundwater sampling, calibration values are recorded in daily sampling records and any errors in calibration are noted. For parameters where calibration is not acceptable, redundant equipment may be used so loss of data is minimized.

B.8. Inspection/Acceptance for Supplies and Consumables

B.8.1 Supplies, Consumables, and Responsibilities

Supplies and consumables for field and laboratory operations will be procured, inspected, and accepted as required from vendors approved by Marquis Carbon Injection LLC, or the respective subcontractor responsible for the data collection activity. Acquisition of supplies and consumables related to groundwater analyses will be the responsibility of the laboratory per established standard methodology or operating procedures.

B.9. Non-direct Measurements

B.9.1 Seismic Monitoring Methods

Data Sources

3D seismic surveys will be conducted at regular intervals during and after CO₂ injection. Each of these surveys will be compared to the baseline survey which was acquired before the start of CO₂ injection. It is important that the only difference between the surveys is the change in acoustic properties of the injection formation caused by the presence of CO₂. Consequently, repeatability of source and receiver types and spacing, source size, and other acquisition parameters between surveys is paramount for an accurate comparison.

Relevance to Project

Confidential, Privileged, or Sensitive Business Information



Processing and comparing subsequent surveys to a baseline survey will allow the project to monitor plume growth as well as to ensure that the plume does not migrate beyond the confining layer. Computational modeling will be used to predict the CO₂ plume growth and migration over time by combining the processed seismic data with the existing geologic model.

Acceptance Criteria

To ensure survey repeatability, consistent acquisition geometry (receiver line spacing, source line spacing, line direction) is required. The seismic sources (vibroseis trucks) should be the same for each survey, including the number of trucks, their specifications, and the characteristics (sweep parameters) of the seismic energy they generate.

Data processing for each survey should be the same and the baseline seismic survey should be reprocessed alongside each additional repeat seismic survey to ensure consistency.

Resources/Facilities Needed

Marquis Carbon Injection LLC will subcontract all necessary resources and facilities for the seismic monitoring, in-zone pressure monitoring, and groundwater sampling.

Validity Limits and Operating Conditions

For seismic surveys and computational modeling, intraorganizational checks between trained and experienced personnel will ensure that all surveys and computational modeling are conducted

conforming to standard industry practices.

B.10. Data Management

B.10.1 Data Management Scheme

Marquis Carbon Injection LLC, or a designated contractor, will maintain the project data required in the permit. Data will be backed up in electronic format and/or held on secure servers. A separate Data Management Plan will be developed to track and store project data.

B.10.2 Record-keeping and Tracking Practices

All records of gathered data will be securely held and properly labeled for auditing purposes.

B.10.3 Data Handling Equipment/Procedures

All equipment used to store data will be properly maintained and operated according to proper industry techniques and/or manufacturer's requirements.

B.10.4 Responsibility

The primary project managers will be responsible for ensuring proper data management is maintained.

B.10.5 Data Archival and Retrieval

All data will be held by Marquis Carbon Injection LLC. These data will be maintained and stored for auditing purposes as described in **Section B.10.1**.

B.10.6 Hardware and Software Configurations

All Marquis Carbon Injection LLC and vendor hardware and software configurations will be appropriately interfaced.

B.10.7 Checklists and Forms

Checklists and forms will be procured and generated as necessary.

C. Assessment and Oversight

C.1. Assessments and Response Actions

C.1.1 Activities to be Conducted

Groundwater quality data will be collected at the frequency outlined in **Table 7A-4**. After completion of sample analysis, results will be reviewed for QC criteria, as noted in **Section B.5**. If the data quality fails to meet criteria set in **Section B.5**, samples will be reanalyzed, if still within

holding time criteria. If outside of holding time criteria or at the operator's choosing, additional samples may be collected, or sample results may be excluded from data evaluations and interpretations. Evaluation for data consistency will be performed according to procedures described in the EPA 2009 Unified Guidance (EPA, 2009).

C.1.2 Responsibility for Conducting Assessments

Organizations gathering data will be responsible for conducting their internal assessments. All stop-work orders will be handled internally within individual organizations.

C.1.3 Assessment Reporting

All assessment information should be reported to the individual organizations project manager outlined in Section A.1.1.F.

C.1.4 Corrective Action

All corrective action affecting only an individual organization's data collection responsibility should be addressed, verified, and documented by the individual project managers and communicated to the other project managers as necessary. Corrective actions affecting multiple organizations should be addressed by all members of the project leadership and communicated to other members on the distribution list for the QASP. Assessments may require integration of information from multiple monitoring sources across organizations (operational, in-zone monitoring, above-zone monitoring) to determine whether correction actions are required and/or the most cost-efficient and effective action to implement. Marquis Carbon Injection LLC will coordinate multiorganization assessments and corrective actions as warranted based on the severity of the event as described in the Emergency and Remedial Response Plan (Permit Section 10.0).

C.2. Reports to Management

C.2.1 QA Status Reports

QA status reports should not be needed. If any testing or monitoring techniques are changed, the QASP will be reviewed and updated as appropriate in consultation with EPA. Revised QASPs will be distributed by Marquis Carbon Injection LLC to the full distribution list at the beginning of this document.

D. Data Validation and Usability

D.1. Data Review, Verification, and Validation

D.1.1 Criteria for Accepting, Rejecting, or Qualifying Data

The groundwater/brine and injection stream analytical data validation will include the review of

the concentration units, sample holding times, and the review of duplicate, blank and other appropriate QA/QC results. All analytical results will be entered into a database or spreadsheet with periodic data review and analysis. Marquis Carbon Injection LLC will retain copies of the laboratory analytical test results and/or reports. Analytical results will be reported on a frequency based on the approved UIC permit conditions. In the periodic reports, data will be presented in graphical and tabular formats as appropriate to characterize general system operations and variability with time.

D.2. Verification and Validation Methods

D.2.1 Data Verification and Validation Processes

See **Sections D.1.1. and B.5** for data verification and validation processes.

Appropriate statistical software will be used to determine data consistency.

D.2.2 Data Verification and Validation Responsibility

Marquis Carbon Injection LLC or its designated subcontractor will verify and validate the injection stream and groundwater analytical data.

D.2.3 Issue Resolution Process and Responsibility

Marquis Carbon Injection LLC or its designated coordinator will provide an overview of the injection stream and groundwater data handling, management, and assessment process. Staff involved in these processes will consult with the coordinator to determine actions that are required to resolve issues.

D.2.4 Checklist, Forms, and Calculations

Checklists and forms will be developed specifically to meet permit requirements.

D.3. Reconciliation with User Requirements

D.3.1 Evaluation of Data Uncertainty

Statistical software will be used to determine groundwater data consistency.

D.3.2 Data Limitations Reporting

The organization-level project managers will be responsible for ensuring that data developed by their respective organizations is presented with the appropriate data-use limitations.

Marquis Carbon Injection LLC will use the current operating procedure for the use, sharing, and presentation of results and/or data for the Marquis BioCarbon Project. This procedure has been developed to ensure quality, internal consistency and facilitate tracking and record keeping of data end-users and associated publications.

References

APHA, 2005, Standard methods for the examination of water and wastewater (21st edition), American Public Health Association, Washington, DC.

ASTM, 2010, Method D7069-04 (reapproved 2010), Standard guide for field quality assurance in a ground-water sampling event, ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA.

ASTM, 2010, Method D6911-03 (reapproved 2010), Standard guide for packaging and shipping environmental samples for laboratory analysis, ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA.

ASTM, 2005, Method D6517-00 (reapproved 2005), Standard guide for field preservation of ground-water samples, ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA.

ASTM, 2005, Method D6564-00 (reapproved 2005), Standard guide for field filtration of ground-water samples, ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA.

ASTM, 2005, Method D6452-99 (reapproved 2005), Standard Guide for Purging Methods for Wells Used for Ground-Water Quality Investigations, ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA.

ASTM, 2002, Method D513-11, Standard test methods for total and dissolved carbon dioxide in water, ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA.

ASTM, 2002, Method D6771-02, Standard guide for low-flow purging and sampling for wells and devices used for ground-water quality investigations, ASTM International, 100 Barr Harbor Drive, West Conshohocken, PA.

Puls, R.W., and M.J. Barcelona, 1996, Low-Flow (Minimal Drawdown) Ground-Water Sampling Procedures. U.S. Environmental Protection Agency, EPA-540/S-95/504.

U.S. Environmental Protection Agency (US EPA), 2009, Statistical analysis of groundwater monitoring data at RCRA facilities—Unified Guidance, US EPA, Office of Solid Waste, Washington, DC.

U.S. Environmental Protection Agency (US EPA), 1974, Methods for chemical analysis of water and wastes, US EPA Cincinnati, OH, EPA-625-/6-74-003a.