

TABLE OF CONTENTS

4 INJECTION WELL CONSTRUCTION PLAN	3
Facility Information.....	3
4.1. Injection Well Construction Overview	3
4.2. Proposed Stimulation Program [40 CFR § 146.82(a)(9)]	4
4.3. Construction Procedures [40 CFR § 146.82(a)(12)]	4
4.4. Maximum Wellhead Injection Pressure	6
4.5. Casing Program.....	10
4.6. Injection Well Tubing and Packer Program.....	19
4.7. Injection Well Cementing Program.....	22
4.8. Injection Well Annular Fluid	25
4.9. Injection Wellhead and Valve Program	25
4.10. Injection Well Routine Maintenance.....	29
4.11. Injection Well Perforation Program	29
4.12. Summary of Monitoring Technologies Deployed in Injection Wells	29
4.13. Schematic of the Subsurface Construction Details of the HGSS Injection Wells.....	30

LIST OF FIGURES

Figure 4-1. Nodal analysis results showing the operating points for the three tubing sizes modelled.....	7
Figure 4-2. Tubing and casing design based on the nodal analysis results.....	8
Figure 4-3. Pressure versus depth for injection of the maximum injection rate with wellhead pressure set to 1200 psi	9
Figure 4-4. Pressure versus depth for injection of the average injection rate with wellhead pressure set to 1200 psi	9
Figure 4-5. A design schematic of the HGSS injection wellhead and Christmas tree used for the NCV-1 CO ₂ injection well	29
Figure 4-6. Design schematic of HGSS NCV-1 CO ₂ injection well	32

LIST OF TABLES

Table 4-1. Summary Table of Well Information for NCV-1.....	3
Table 4-2. Summary Table of Generalized Completion Depth Intervals for NCV-1.....	4
Table 4-3. NCV-1 Parameters Used in the Nodal Analysis Simulation.....	6
Table 4-4. Minimum Design Factors.....	11

Table 4-5. Surface Casing Load Scenarios Evaluated showing the design factors for each scenario	13
Table 4-6. Intermediate Casing Load Scenarios Evaluated showing the design factors for each scenario	14
Table 4-7. Long-String Casing Load Scenarios evaluated showing the design factors for each scenario	15
Table 4-8. Tubing load scenarios evaluated showing the design factors for each scenario.	16
Table 4-9. HGSS Injection Well Casing Program and Properties of Materials.....	20
Table 4-10. Required Specifications for Tubing and Packer Selection and Placement (\$146.86(c))	21
Table 4-11. Specifications of the Anticipated CO ₂ Stream Composition.....	21
Table 4-12. Tubing and Packer Details.....	22
Table 4-13. Specifications of the HGSS Cementing Program.....	24
Table 4-14. Materials Specification of Wellhead and Christmas Tree.....	26
Table 4-15. Material Classes from API 6A (Spec. for Wellhead and Christmas Tree Equipment).	27
Table 4-16. *Technologies Deployed in NCV-1 Injection Well for Monitoring Purposes.....	29

4 INJECTION WELL CONSTRUCTION PLAN
40 CFR 146.82(a) (9), (11), (12)

Heartland Greenway Storage Site NCV-1 Injection Well

Facility Information

Facility name: Heartland Greenway Storage Site (HGSS)
NCV-1

Facility Operator: Heartland Greenway Carbon Storage, LLC (HGCS)

Facility Contact: David Giles, President and COO
2626 Cole Ave., Dallas, Texas, USA 75204
Phone: (210) 880-6000; Email: dgiles@navco2.com

Project Location: Taylorville, Christian County, Illinois
39.597084 / -89.269639

4.1. Injection Well Construction Overview

Heartland Greenway Carbon Storage LLC. (HGCS) seeks to drill and construct a new Class VI CO₂ Injection well, NCV-1, within the Heartland Greenway Storage Site (HGSS) to support CO₂ storage operations and has designed this well construction plan in accordance with 40 CFR §146.86, pursuant to 40 CFR §146.82. HGCS has implemented well design strategies and materials focused on (1) preventing movement of fluids into or between USDWS or into any authorized zones; (2) permitting the use of appropriate testing devices and workover tools and; (3) permit continuous monitoring of the annulus space between the tubing and long string casing. Any necessary changes to this well plan due to logistical or geological conditions encountered within the field will be communicated to the Director prior to well construction. A summary of the spatial location, coordinates and well API/UWI values for NCV-1 are shown below in **Table 4-1**, and general well construction details are detailed below in **Table 4-2**.

Table 4-1. Summary Table of Well Information for NCV-1.

Well Name	Location (LAT/LONG) ±300 ft	API	Operator	Completion Footages	Total Depth
NCV-1	39.597084 / -89.269639	TBD	Heartland Greenway Carbon Storage, LLC	Sensitive, Confidential, or Privileged Information	

Table 4-2. Summary Table of Generalized Completion Depth Intervals for NCV-1

Casing	T.O.C-Shoe Depth (ft. MD.)	Open Hole Diameter (inches)	Comment
30" Conductor	Sensitive, Confidential, or Privileged Information		Driven or drilled into shallow soils until refusal
20" Surface			Ran through shallow USDWs
13 3/8" Intermediate			Ran through deepest USDW to top of Eau Claire Caprock
9 5/8" Long String			Ran to well terminal depth (Precambrian)

4.2. Proposed Stimulation Program [40 CFR § 146.82(a)(9)]

While not anticipated based on existing interpolations of reservoir quality, a well stimulation program (such as an acid wash) may be proposed by HGCS based on geologic conditions and data identified during drilling and well testing/logging operations. If well stimulation is determined to be required to meet injection goals of the NCV-1 well, HGCS will complete the required stimulation plan [attached to this permit] and communicate the details of the well stimulation program to the Director. HGCS will not proceed with well stimulation operations until approval is received.

4.3. Construction Procedures [40 CFR § 146.82(a)(12)]

The NCV-1 injection well has been designed to accommodate the mass of CO₂ that will be delivered to it, while considering critical characteristics of the CO₂ storage reservoir which affect the well design. Well design principals and materials detailed in subsequent sections were selected and vetted to ensure construction materials have sufficient structural strength to provide sustained mechanical integrity throughout the life of the CCS project in addition to permitting the use of appropriate testing devices, workover tools and continuous monitoring of the annulus space between the injection tubing and long string casing. All well construction materials were selected to be compatible with fluids of which they may be expected to come into contact (e.g., corrosion-resistant cement) and meet or exceed API and ASTM International standards. This plan illustrates the comprehensive analysis performed to comply with and exceed the standards detailed in 40 CFR §146.86 and other related sections (§146.87, 146.88, 146.89, 146.90, 146.94 (a), 146.91), in pursuant to 40 CFR § 146.82 regarding the design of the injection well casing, cement, and wellhead and their relation to subsequent testing, monitoring, and reporting activities.

The construction of the NCV-1 injection well within the Heartland Greenway Storage site will be performed using best practices and will conform to all requirements of Class VI Rule VI at 40 CFR 146.86(b). The drilling of the injection well in this part of the Illinois Basin is straightforward with very few known drilling hazards apart from a possible lost circulation zone in the Potosi formation within the intermediate section of the well. The surface casing will be set Sensitive, Confidential, or Privileged Information and will be cemented to surface so that any shallow USDW aquifers will be protected. A normal Sensitive, Confidential, or Privileged Information mud weight will prevent any movement of fluids from one aquifer to another. An intermediate section is planned from the base of the surface casing to the top of the Eau Claire formation which will also cover the St. Peter formation. This section will pass through the Potosi formation, previously recognized as a potential lost circulation zone. If a loss of circulation is encountered, lost circulation materials will be used to regain circulation. If lost circulation materials are not successful, cement plugs will be placed across the zone to enable the well to be drilled to casing point. The intermediate casing will be cemented in two stages with the first stage covering from T.D. at the top of the Eau Claire formation to just above the Potosi formation. The well will be circulated until the first stage cement is set through a stage collar and then the second stage will place cement from the stage collar to surface. The T.D. section will then be drilled through the Eau Claire formation, through the Mt. Simon formation and reaching total depth in basement rocks. The long string casing will then be cemented from T.D. back to surface. While drilling each section of the well the deviation will be checked to ensure that the well stays as close to vertical as possible with the deviation staying below five degrees and no section of the well will have a dog-leg severity Sensitive, Confidential, or Privileged Information. Should a deviation correction be required directional drilling tools will be employed. There are no known abnormal pressure formation in this area so mud weights Sensitive, Confidential, or Privileged Information will provide well control. The casing and cements to be used in construction of the NCV-1 well will be compatible with the injected CO₂. A minimum of CR-13 casing will be used across the injection zone and caprock and on the lower section of the intermediate casing. This design has been confirmed with manufacturer testing performed to ASTM and Corrosion Standards. Cement across these sections will be CO₂ resistant as shown by API and ASTM testing.

The targeted injection formation will be tested prior to final completion by step-rate testing and pressure fall-off testing. These tests will confirm that the proposed injection zone will be able to receive the required volume of CO₂ while injection pressures will stay below fracturing pressure. The injection tubing will be a minimum of CR-13 and will be sized to accommodate the expected injection rate. The size of the wellbore will allow monitoring equipment to be placed in the wellbore so that injection and annular pressure can be monitored. The tubing will also be sized such that surveillance logging can be accommodated. More detail of the well construction methods and materials will be found in the following sections.

4.4. Maximum Wellhead Injection Pressure

A nodal analysis was conducted to determine the injection tubing diameter for the NCV-1 CO₂ injection well. Nodal analysis identifies the operating point where inflow at the top of the well and outflow at the bottom of the well match for different sizes of tubing, allowing a tubing size to be selected that meets the project needs of approximately one million metric tons per year (2740 metric tons per day) injected per well on average and a maximum rate of 1.34 million metric tons per year (3671 metric tons per day). Schlumberger's PIPESIM software was used to size the injection tubing. [REDACTED] Sensitive, Confidential, or Privileged Information

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

Table 4-3. NCV-1 Parameters Used in the Nodal Analysis Simulation

Nodal Analysis Assumption	Value
Long Casing Size	Sensitive, Confidential, or Privileged Information
Perforation Zone	[REDACTED]
Perforation Specifics	[REDACTED]
Reservoir Temperature	[REDACTED]
Permeability	[REDACTED]
Reservoir pressure gradient	[REDACTED]
Wellhead Pressure	[REDACTED]

Sensitive, Confidential, or Privileged Information




Figure 4-1. Nodal analysis results showing the operating points for the three tubing sizes modelled.

The results of the nodal analysis were used to update the PIPESIM flow model to have a 13 3/8 inch 61 lb/ft intermediate casing set at 4948 ft and a 9 5/8 inch 47 lb/ft long-string casing set at 6431 ft that contains a 5 1/2 inch 17lb/ft with a packer set at 5900 ft. This design is illustrated in **Figure 4-2** below. Using this design injection was modeled and the results for both the maximum rate (**Figure 4-3**) and average rate (**Figure 4-4**) show that 5 1/2 17 lb/ft tubing will meet the project requirements.

Sensitive, Confidential, or Privileged Information




Figure 4-2. Tubing and casing design based on the nodal analysis results.

Sensitive, Confidential, or Privileged Information

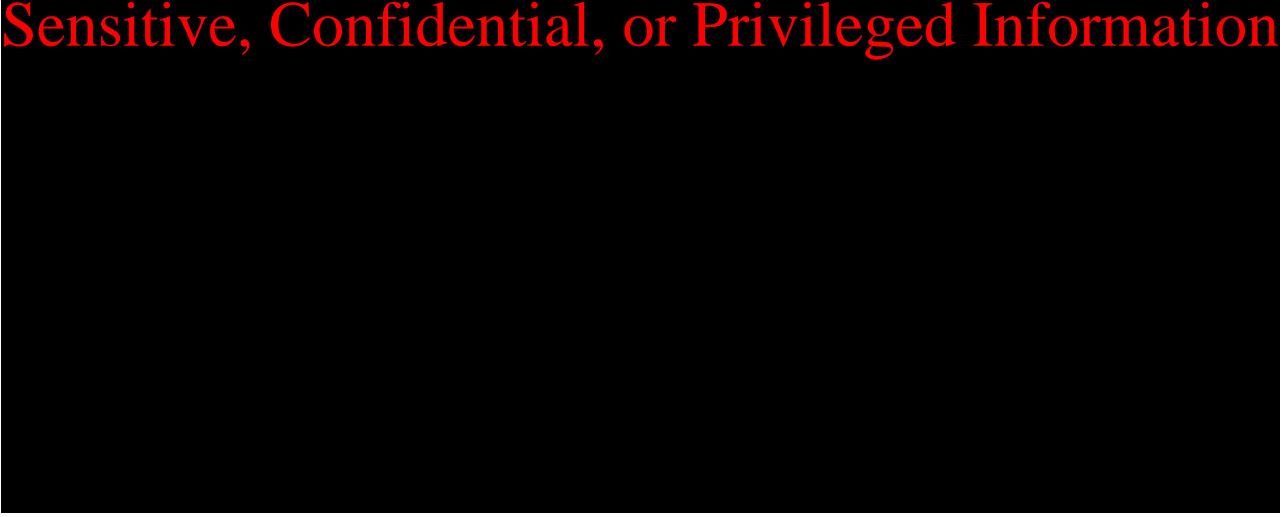


Figure 4-3. Pressure versus depth for injection of the maximum injection rate with wellhead pressure set to 1200 psi.

Sensitive, Confidential, or Privileged Information




Figure 4-4. Pressure versus depth for injection of the average injection rate with wellhead pressure set to 1200 psi.

4.5. Casing Program

The NCV-1 injection well design has been developed to accommodate a 5 1/2-inch outer diameter (OD) tubing string, based on the nodal analysis presented in the previous section and was designed to accommodate the concentric casing sizes required to isolate the injection reservoir from USDWs and prevent fluid flow into any unauthorized zones. In accordance with 40 CFR § 146.86, the casing program was designed while considering the following factors:

- 1) Depth to the injection zone;
- 2) Injection pressure, external pressure, internal pressure, and axial loading;
- 3) Hole sizes;
- 4) Size and grade of all casing strings (wall thickness, external diameter, nominal weight, length, joint specification, and construction material);
- 5) Corrosiveness of the CO₂ stream and formation fluids;
- 6) Downhole temperatures;
- 7) Lithology of injection and confining zones;
- 8) Type or grade of cement and cement additives;
- 9) Quantity, chemical composition, and temperature of the CO₂ stream;

In accordance with 40 CFR §146.87, prior to running each casing string, all open-hole logging and testing operations (deviation surveys, open hole logging, formation testing) will be completed. Please see the *Pre-operations Formation Testing section* of this permit for a detailed breakdown of which specific methods and tools will be utilized for the well.

To prevent unintended fluid migration and protect USDW integrity, the surface casing string will extend through shallow USDWs, the intermediate casing string will extend through the lowermost USDW aquifer (St. Peter Sandstone), and the long string casing will extend from the surface through the injection interval with a sufficient number of centralizers. All casing strings will be cemented in place to the surface in one or more stages (see the cementing program below for additional detail).

The metallurgy for each casing string was selected to be compatible with the fluids and stresses encountered within the well and meet or exceed API and ASTM standards. Sensitive, Confidential, or Privileged Information



Casing loadings were modelled using Schlumberger's Tubing Design and Analysis (TDAS) software. To ensure sufficient structural strength and mechanical integrity throughout the life of the HGSS project, stresses were analyzed and calculated according to worst-case scenarios and tubular specifications were selected accordingly. Minimum design factors are presented in **Table**

4-4. Table 4-5 through Table 4-8 below summarize the results of this stress analysis. The burst, collapse, and tensile strength of each tubular was calculated according to the scenarios defined below and was dependent on fracture gradients, mud weight, depths, and minimum safety factors.

As demonstrated, these safety factors are sufficient in the worst-case scenarios to prevent migration of fluids into or out of USDWs or unauthorized zones. The casing and tubing materials are designed to be compatible with the fluids encountered and the stresses induced throughout the sequestration project. Schlumberger Integrated Drilling Systems design standards were incorporated for the casing design calculations, and Schlumberger Completions group standards were incorporated for the tubing design calculations.

Table 4-4. Minimum Design Factors.

Load	Casing Design Criteria	Tubing Design Criteria
Burst	Sensitive, Confidential, or Privileged Information	
Collapse		
Tension		
Compression		
VME		

The casing installed in any well should be designed to withstand collapse loading based on the following assumption:

1. The hydrostatic head of the drilling fluid in which the casing is run acts on the exterior of the casing at any given depth;
2. Subject to the casing is 1/3 evacuated;
3. The production casing is completely evacuated;
4. The effect of axial stresses on collapse resistance shall be considered; and
5. The effect of temperature deration and casing wear shall be considered.

Any casing/liner that creates an annular space with the production tubing shall be treated as a production casing/liner. The casing installed in any well shall be designed to withstand tensile loading based on the following assumptions:

1. The weight of casing is its weight in air; and
2. The tensile strength of the casing is the yield strength of the casing wall or of the joint, whichever is the lesser.

The following additional assumptions were made during the design process for the Injection wells:

1. A 5% casing wear due to Bottomhole Assembly (BHA) rotation is assumed on all casing design segments with consecutive hole sections;

2. Wall tolerance of 87.5% is assumed as per API standards;
3. Temperature deration is considered on the design of the 13-3/8-inch and 9-5/8- inch casing strings; and
4. The 13-3/8-inch casing is being proposed and engineered to be required to comply with a casing design to pass a 1/3 evacuation loading on collapse.

If the casing recommended is not available, final casing selection would be based on what other technical options are currently available and what might in stock in US-based tubular suppliers' inventory. The minimum criteria for an alternate design would be to exceed standard design criteria.

Table 4-5. Surface Casing Load Scenarios Evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information

Table 4-6. Intermediate Casing Load Scenarios Evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information

Table 4-7. Long-String Casing Load Scenarios evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information

Table 4-8. Tubing load scenarios evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information

4.5.1.1. Casing Summary

Sensitive, Confidential, or Privileged Information

Please refer to

Table 4-11. Specifications of the Anticipated CO₂ Stream Composition

Component	Specification	Unit
Minimum CO ₂	98	mole%, dry basis
Water content	< / = 20	lb/MMscf
Impurities (dry basis):		
Total Hydrocarbons	< / = 2	mol%
Inert Gases (N ₂ , Ar, O ₂)	< / = 2	mol%
Hydrogen	< / = 1	mol%
Alcohols, aldehydes, esters	< / = 500	ppmv
Hydrogen Sulfide	< / = 100	ppmv
Total Sulfur	< / = 100	ppmv
Oxygen	< / = 100	ppmv
Carbon monoxide	< / = 100	ppmv
Glycol	< / = 1	ppmv

below for a summary of the properties and placement of casing strings within the casing program. All casing strings will be cemented to the surface in one or more stages in accordance with 40 CFR §146.86. The borehole diameters are considered conventional sizes for the sizes of casing that will be used and should allow ample clearance between the outside of the casing and the borehole wall to ensure that a continuous cement seal can be emplaced along the entire length of the casing string. Each section of the well is discussed in a separate subsection below.

4.5.1.2. Conductor Casing

The conductor casing consists of 30-inch, B-grade carbon steel pipe which will provide the stable base required for drilling activities in unconsolidated sediment. Depending on wellsite conditions, the conductor casing will be driven or drilled into shallow soils until striking bedrock

or casing can advance no further below the ground surface. The conductor casing will then be cemented in place.

4.5.1.3. Surface Casing

The surface casing consists of Sensitive, Confidential, or Privileged Information pipe with buttress thread couplings (BTC). The metallurgy of this casing string will be carbon steel and the surface casing string will be cemented to the surface. Prior to running the surface casing downhole, all appropriate logging and testing operations will be completed. The surface string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing* section of this permit for further details.

4.5.1.4. Intermediate Casing

The intermediate casing consists of Sensitive, Confidential, or Privileged Information pipe with BTC couplings. The intermediate string will extend from the ground surface to the top of the confining zone (Eau Claire). The metallurgy of this casing string will be carbon steel and the intermediate casing string will be cemented to the surface to isolate and protect USDW zones. Prior to running the intermediate casing downhole, all appropriate logging and testing operations will be completed. The intermediate string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing* section of this permit for further details.

4.5.1.5. Long String Casing

The long-string casing will be Sensitive, Confidential, or Privileged Information pipe composed of two sections. The uppermost section will extend from the ground surface to 500-feet from the top of the confining unit (Eau Claire) and will be comprised of Sensitive, Confidential, or Privileged Information carbon steel pipe with either long thread coupling (LTC) or BTC connections. Sensitive, Confidential, or Privileged Information



Upon selection of the proprietary seal type, the seal type will be communicated to the Director and HGCS will utilize such seal pending approval from the Director. Prior to running the intermediate casing downhole, all appropriate logging and testing operations will be completed. The long string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent

fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing Section* of this permit for further details.

4.6. Injection Well Tubing and Packer Program

The tubing connects the injection zone to the wellhead, providing a pathway for safely injecting and storing CO₂. In accordance with 40 CFR § 146.86 (c), the tubing and packer material used for construction of the NCV-1 injection well will be compatible with fluids with which the material may be expected to come into contact with and will meet or exceed API and ASTM international standards. HGCS will inject CO₂ through corrosion-resistant tubing with a packer set at a depth opposite a cemented interval a location approved by the Director. While selecting the tubing and packers for the NCV-1 injection, the following factors were taken into consideration:

1. Depth of setting;
2. Characteristics of the CO₂ stream (chemical content, corrosiveness, temperature, and density) and formation fluids;
3. Maximum proposed injection pressure;
4. Maximum proposed annular pressure;
5. Proposed injection rate (intermittent or continuous) and volume and/or mass of the CO₂ stream;
6. Size of tubing and casing; and
7. Tubing tensile strength, burst and collapse pressures.

A summary of these factors is available in **Table 4-10, Table 4-11, and Table 4-12**. Any change to the tubing and packer specifics detailed in the below will be communicated to the Director.

Sensitive, Confidential, or Privileged Information



Please refer to **Table 4-8, Table 4-10, Table 4-11 and Table 4-12** for modelled load scenarios and specifications for the tubing and packer. The annulus between the tubing and long-string casing will be filled with noncorrosive fluid described in further detail within the annular fluid program in Section 4.8 below.

Table 4-9. HGSS Injection Well Casing Program and Properties of Materials.

Sensitive, Confidential, or Privileged Information

Table 4-10. Required Specifications for Tubing and Packer Selection and Placement (§146.86(c))

Parameter	Attribute	
Characteristics of the CO ₂ Stream	Chemical Content	Please refer to Table 4-11 below.
	Corrosiveness	<i>Stream will contain <50ppm of water and likely not to cause CO₂-driven corrosion</i>
	Temperature	50 °F (At wellhead) 131°F (Injection Zone)
	Density	57.26 lb/ft ³ (at wellhead, under 1400 psi) 49.65 lb/ft ³ (at injection zone, under 3,395 psi)
Characteristics of Formation Fluids (Mount Simon Reservoir)	Temperature	131 °F
	Formation Pressure	2,634 psi
	Fluid Density	68.5 lb/ft ³
	Salinity	160,000 Mg/L
Maximum Proposed Injection Pressure (Downhole)	3,809 psi	
Maximum Proposed Annular Pressure	4,059 psi	
Average Proposed Injection Rate (CO ₂)	2,740 Metric Tons/day	
Volume of CO ₂ Stream	53 MMCF/day	

Table 4-11. Specifications of the Anticipated CO₂ Stream Composition

Component	Specification	Unit
Minimum CO ₂	98	mole%, dry basis
Water content	< / = 20	lb/MMscf
Impurities (dry basis):		
Total Hydrocarbons	< / = 2	mol%
Inert Gases (N ₂ , Ar, O ₂)	< / = 2	mol%
Hydrogen	< / = 1	mol%
Alcohols, aldehydes, esters	< / = 500	ppmv
Hydrogen Sulfide	< / = 100	ppmv
Total Sulfur	< / = 100	ppmv
Oxygen	< / = 100	ppmv
Carbon monoxide	< / = 100	ppmv

Glycol	< / = 1	ppmv
--------	---------	------

Table 4-12. Tubing and Packer Details.

Item	Setting Depth (Approximate)	Tensile Strength (psi)	Burst Strength (psi)	Collapse Strength (psi)	Material (weight/grade/connection)
Tubing	Sensitive, Confidential, or Privileged Information				
<i>Packer</i> (Baker Hughes Model F Permanent Packer)					

*Setting depth interval is dependent on geological conditions observed in the field and is subject to change.

** JFEBEAR™ or similar premium connection

4.7. Injection Well Cementing Program

This section discusses the types and quantities of cement that will be used for each string of casing during construction of the HGSS NCV-1 injection well. In accordance with 40 CFR §146.86, the cement and cement additives were designed to have sufficient quality and quantity to maintain seal integrity throughout the life of the HGSS project and are compatible with the fluids (CO₂ stream and formation fluids) with which the materials may be expected to come into contact and meet or exceed API and ASTM standards. The cementing program has been designed to prevent the movement of fluids out of the sequestration zone into overlying USDWs. The cementing program was designed while considering the following critical factors:

1. Depth to the sequestration zone;
2. Injection pressure, external pressure, internal pressure, and axial loading;
3. Hole sizes;
4. Size and grade of all casing strings (wall thickness, external diameter, nominal weight, length, joint specification, and construction material);
5. Corrosiveness of the CO₂ stream and formation fluids;
6. Downhole temperatures;
7. Lithology of sequestration and confining zones;
8. Type or grade of cement and cement additives; and

9. Quantity, chemical composition, and temperature of the CO₂ stream.

After cementing each casing string to the surface, the integrity and location of cement will be verified using a cement-bond log capable of evaluating the cemental quality radially and identifying the presence/location of channels to ensure against the likelihood of unintended release of CO₂ from the sequestration zone into the storage complex. Please refer to the pre-operational formation testing plan for further details. Any changes to the cement program will be communicated to the Director prior to well construction operations.

Table 4-13 below features the cement types, cement additives, quantities, and staging depths for each casing string. Each casing string will be cemented to the surface in one or more stages using the balance method. A sufficient number of casing centralizers will be used on all casing strings to centralize the casing in the hole and help ensure that cement completely surrounds the casing along the entire length of pipe. Except for the conductor casing, a guide shoe or float shoe will be run on the bottom of the bottom joint of casing and a float collar will be run on the top of the bottom joint of casing.

Due to the technical challenges involving cementing within geologic formations such as the Potosi Dolomite, the intermediate casing string of each HGSS injection well will be cemented in two stages. To facilitate a two-stage cement job, a multiple-stage cementing tool will be installed approximately 200 ft above the top of the Potosi Formation. After the completion of the first-stage cement job for the intermediate casing string, the multiple-stage cementing tool will be opened and fluid will be circulated down the casing and up the annulus above the cementing tool for a minimum of 8 hours to allow the first-stage cement job to acquire sufficient gel strength.

Sensitive, Confidential, or Privileged Information

Additionally, the excess space (“rathole”) from the top of the Argenta to the well’s terminal depth will be plugged back with EverCRETE to avoid unintended pressure transmission from the injection zone into the basement or near-basement zones. This will be likely be accomplished by setting the float shoe just above the top of the Argenta during long string cementing operations, however other methods may be considered. After an appropriate amount of setting time, cement-bond logs will be run and analyzed for each casing string as detailed in *Pre-operations Formation Testing Plan*.

Table 4-13. Specifications of the HGSS Cementing Program.


Sensitive, Confidential, or Privileged Information

4.8. Injection Well Annular Fluid

The annular space above the packer between the 9 5/8-inch long-string casing and the 5 1/2-inch injection tubing will be filled with a non-corrosive fluid to provide a positive pressure differential to stabilize the injection tubing and inhibit corrosion. The annular fluid will be a dilute salt solution such as potassium chloride (KCl), sodium chloride (NaCl), calcium chloride (CaCl₂), or similar solution. The fluid will be mixed onsite from dry salt and good quality (clean) freshwater, or it will be acquired pre-mixed. The fluid will also be filtered to ensure that solids do not interfere with the packer or other components of the annular protection system. The final choice of the type of fluid will depend on availability.

The annulus fluid will contain additives and inhibitors including a corrosion inhibitor, biocide (to prevent growth of harmful bacteria), and an oxygen scavenger. Example additives and inhibitors are listed below along with approximate mix rates:

Sensitive, Confidential, or Privileged Information

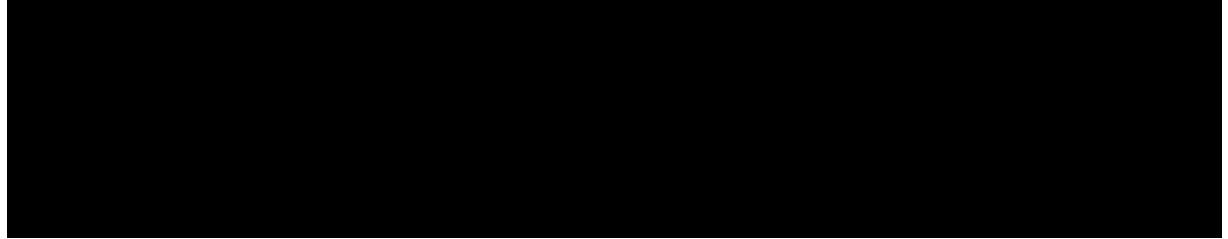

These products recommendations were provided by Tetra Technologies, Inc., of Houston, Texas. Actual products may vary from those described above.

4.9. Injection Wellhead and Valve Program


This section details the specifications of the injection wellheads and valves to be used for the NCV-1 injection well. All wellheads, valves, piping and surface facilities have been designed to meet or exceed API and ASTM international standards for the maximum anticipated injection pressure and will be maintained in a safe and leak-free condition. HGCS will equip all ports on the wellhead assembly above the casing bowl of injection wells with valves, blind flanges, or similar equipment. HGCS will also equip the injection well with valves to provide isolation of wells from the pipeline system and allow entry into the wells.

The HGSS NCV-1 injection wellhead will consist of the following components, from bottom to top:

Sensitive, Confidential, or Privileged Information




Sensitive, Confidential, or Privileged Information



The wellhead and Christmas tree will be composed of materials that are designed to be compatible with the injection fluid upon which the material may be expected to come into contact with. All components that encounter the CO₂ injection fluid will be made of a corrosion-resistant alloy such as stainless steel. Because the CO₂ injection fluid will be very dry, use of stainless-steel components for the flow-wetted components is a conservative measure to minimize corrosion and increase the life expectancy of this equipment. Materials that will not have contact with the injection fluid, such as the surface casing and shallow portion of the long string, will be manufactured of carbon steel. A preliminary materials specification for the wellhead and Christmas tree assembly is described in **Table 4-14** using material classes as defined in American Petroleum Institute (API) Specification 6A (Specification for Wellhead and Christmas Tree Equipment). A summary of material class definitions is provided in **Table 4-15**. The final wellhead and Christmas tree materials specification may vary slightly from the information given below because neither has been selected yet. A generalized illustration of the wellhead and Christmas tree is provided in **Figure 4-5**. If any changes are made to the wellhead and valve program, HGSC will communicate these changes to the Director and will finalize program specifics upon approval from the Director.

Table 4-14. Materials Specification of Wellhead and Christmas Tree.

Sensitive, Confidential, or Privileged Information

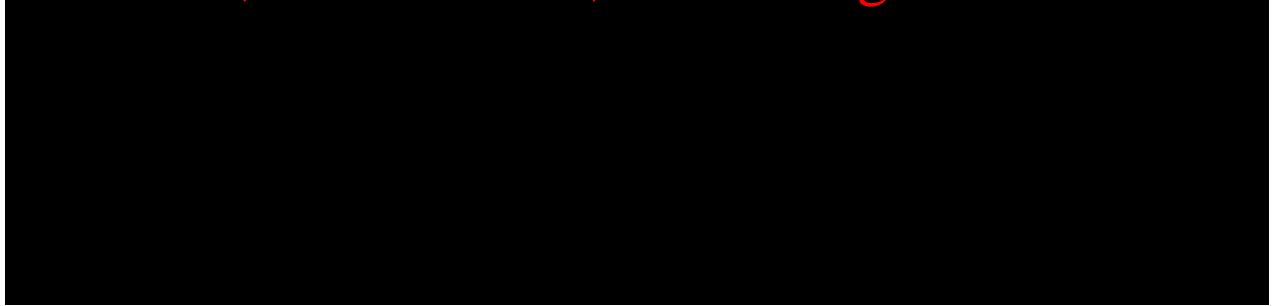

Sensitive, Confidential, or Privileged Information

Table 4-15. Material Classes from API 6A (Spec. for Wellhead and Christmas Tree Equipment).

API Material Class	Body, Bonnet, End & Outlet Connections	Pressure Controlling Parts, Stems, & Mandrel Hangers
AA – General Service	Sensitive, Confidential, or Privileged Information	
BB – General Service		
CC – General Service		
DD – Sour Service ^(a)		
EE – Sour Service ^(a)		
FF – Sour Service ^(a)		
HH – Sour Service ^(a)		

Source: Cameron Surface Systems, Houston, Texas

(a) As defined by National Association of Corrosion Engineers (NACE) Standard MR075.

(b) In compliance with NACE Standard MR0175.

Sensitive, Confidential, or Privileged Information




Figure 4-5. A design schematic of the HGSS injection wellhead and Christmas tree used for the NCV-1 CO₂ injection well.

4.10. Injection Well Routine Maintenance

HGCS will perform routine well maintenance on all injection wells. Routine maintenance will consist of wellhead valve maintenance and a review of recorded casing annular pressure measurements. If a significant deviation is noted (such that the mechanical integrity of the well is comprised or may become compromised), the appropriate remediation plan will be triggered. Please see the *Injection Well Operational Plan* and the *Emergency and Remedial Response Plan* sections for additional details.

4.11. Injection Well Perforation Program

The long-string casing will be perforated across the Mount Simon Sandstone with deep-penetrating shaped charges. The exact perforation interval will be determined after the well is drilled and characterized with geophysical logging/formation testing techniques. Sensitive, Confidential, or Privileged Information



4.12. Summary of Monitoring Technologies Deployed in Injection Wells

To meet monitoring and operational requirements of 40 CFR §146.90 and §146.88, several technologies will be deployed within-and-around the NCV-1 injection well to monitor critical parameters needed to ensure sustained integrity of the HGSS storage complex and protection of overlying USDWs. **Table 4-16** below details the suite of monitoring technologies that will be deployed directly within or around injection wellbore and surface injection wellhead/tree assemblies. Please refer to the testing and monitoring section of this permit for a more detailed breakdown of the HGSS monitoring network, monitoring technologies and monitoring strategies.

Table 4-16. *Technologies Deployed in NCV-1 Injection Well for Monitoring Purposes

Device(s)	Location	Purpose	Monitoring category
Wellhead Pressure-Temperature Gauge	<small>Sensitive, Confidential, or Privileged Information</small>	Wellhead Injection Pressure and temperature	CO ₂ Injection Process Monitoring
Downhole Pressure - Temperature Gauge		Reservoir & Bottom-Hole Pressure/Temperature	
Continuous Annular Pressure Gauge		Annular Pressure Monitoring	


Device(s)	Location	Purpose	Monitoring category
Downhole Pressure-Temperature Gauge	Sensitive, Confidential, or Privileged Information	Annular Pressure Monitoring	
Distributed Temperature Sensing (DTS)		Distributed Temperature Monitoring (Reservoir, Upper Mt. Simon, Eau Claire, Argenta, Precambrian Basement)	CO ₂ Injection Process Monitoring & In-direct Plume Monitoring
Daniel Sr Orifice Mass Flow Meter		Injection Rate and Volume	CO ₂ Injection Process Monitoring
Distributed Acoustic Sensing Fiber Optics (DAS)		3D/4D VSP & Microseismic	In-direct Plume Monitoring & Seismicity Monitoring
Surface Laser Gas Detection System		Leak Detection	Surface or Near Surface Monitoring

*Note this list of technology does not encompass all monitoring technologies deployed within the HGSS monitoring network; please refer to the testing and monitoring section for a detailed breakdown of the HGSS monitoring network and strategy.

4.13. Schematic of the Subsurface Construction Details of the HGSS Injection Wells

A generalized schematic of the HGSS NCV-1 injection well is shown in **Figure 4-6**. As discussed in the previous sections, the injection well will include the following casing strings:

Sensitive, Confidential, or Privileged Information

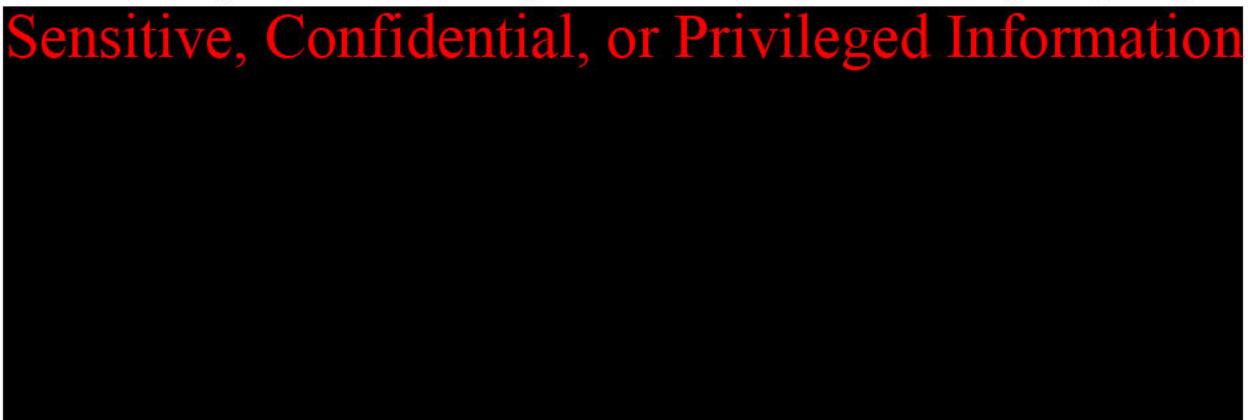

All depths are preliminary and will be adjusted based on additional characterization data obtained while drilling the CO₂ injection wells. The conductor, surface, intermediate, and long casing strings will be cemented to surface in accordance with 40 CFR § 146.86. The purpose of the conductor string is to provide a stable borehole across the near-surface, unconsolidated glacial deposits before drilling the remaining deeper casing strings and to help protect the

USDWs. Groundwater in the vicinity of the site is normally obtained from sand and gravel deposits that are contained within the unconsolidated Quaternary-aged material above bedrock. According to the Illinois Geological Survey ILWATER map, unconsolidated sand, and gravel deposits within the vicinity of the proposed site can range in depth from about 0 to 500 ft bgs and bedrock can range in depth from 400-600 feet bgs. The surface string will extend across the uppermost bedrock layers (Pennsylvanian age) and will help to further isolate and protect the USDWs. The intermediate casing string will extend across and isolate deeper potentially unstable layers or layers where there is potential for lost circulation to ensure that the well can be drilled to total depth, in addition to isolating and protecting the deeper USDWs (St. Peter Sandstone).

Sensitive, Confidential, or Privileged Information



Sensitive, Confidential, or Privileged Information

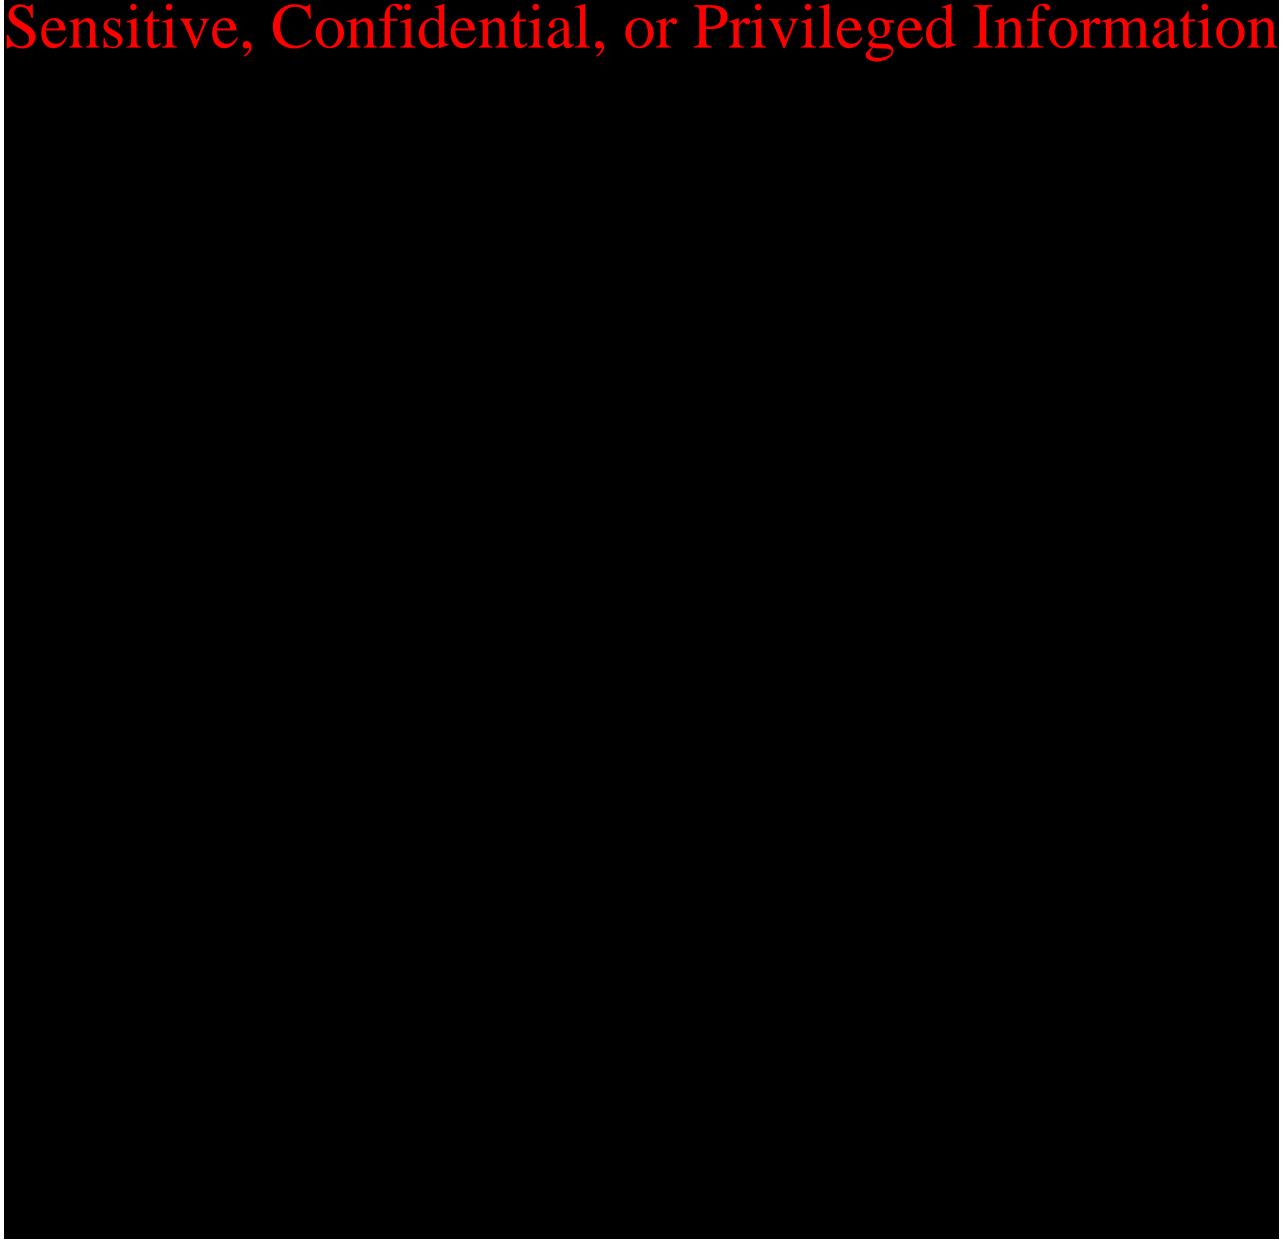


Figure 4-6. Design schematic of HGSS NCV-1 CO₂ injection well.

TABLE OF CONTENTS

4	INJECTION WELL CONSTRUCTION PLAN.....	3
4.1.	Injection Well Construction Overview	3
4.2.	Proposed Stimulation Program [40 CFR § 146.82(a)(9)]	4
4.3.	Construction Procedures [40 CFR § 146.82(a)(12)]	4
4.4.	Maximum Wellhead Injection Pressure	6
4.5.	Casing Program.....	10
4.6.	Injection Well Tubing and Packer Program.....	19
4.7.	Injection Well Cementing Program	22
4.8.	Injection Well Annular Fluid	25
4.9.	Injection Wellhead and Valve Program	25
4.10.	Injection Well Routine Maintenance	29
4.11.	Injection Well Perforation Program.....	29
4.12.	Summary of Monitoring Technologies Deployed in Injection Wells	29
4.13.	Schematic of the Subsurface Construction Details of the HGSS Injection Wells	30

LIST OF FIGURES

Figure 4-1. Nodal analysis results showing the operating points for the three tubing sizes modelled.....	7
Figure 4-2. Tubing and casing design based on the nodal analysis results.....	8
Figure 4-3. Pressure versus depth for injection of the maximum injection rate with wellhead pressure set to 1200 psi	9
Figure 4-4. Pressure versus depth for injection of the average injection rate with wellhead pressure set to 1200 psi	9
Figure 4-5. A design schematic of the HGSS injection wellhead and Christmas tree used for the NCV-2 CO ₂ injection well.....	29
Figure 4-6. Design schematic of HGSS NCV-2 CO ₂ injection well.	32

LIST OF TABLES

Table 4-1.Summary Table of Well Information for NCV-2.....	3
Table 4-2. Summary Table of Generalized Completion Depth Intervals for NCV-2.....	4
Table 4-3. NCV-2 Parameters Used in the Nodal Analysis Simulation.....	6
Table 4-4. Minimum Design Factors.....	11
Table 4-5. Surface Casing Load Scenarios Evaluated showing the design factors for each scenario.	13

Table 4-6. Intermediate Casing Load Scenarios Evaluated showing the design factors for each scenario.....	14
Table 4-7. Long-String Casing Load Scenarios evaluated showing the design factors for each scenario.....	15
Table 4-8. Tubing load scenarios evaluated showing the design factors for each scenario.	16
Table 4-9. HGSS Injection Well Casing Program and Properties of Materials.....	20
Table 4-10. Required Specifications for Tubing and Packer Selection and Placement (\$146.86(c))	21
Table 4-11. Specifications of the Anticipated CO ₂ Stream Composition.....	21
Table 4-12. Tubing and Packer Details.....	22
Table 4-13. Specifications of the HGSS Cementing Program.....	24
Table 4-14. Materials Specification of Wellhead and Christmas Tree.....	27
Table 4-15. Material Classes from API 6A (Spec. for Wellhead and Christmas Tree Equipment).	27
Table 4-16. *Technologies Deployed in NCV-2 Injection Well for Monitoring Purposes.....	29

4 INJECTION WELL CONSTRUCTION PLAN
40 CFR 146.82(a) (9), (11), (12)

Heartland Greenway Storage Site NCV-2 Injection Well

Facility Information

Facility name: Heartland Greenway Storage Site (HGSS)
NCV-2
Facility Operator: Heartland Greenway Carbon Storage, LLC (HGCS)
Facility Contact: David Giles, President and COO
2626 Cole Ave., Dallas, Texas, USA 75204
Phone: (210) 880-6000; Email: dgiles@navco2.com
Project Location: Taylorville, Christian County, Illinois
39.626496 / -89.269627

4.1. Injection Well Construction Overview

Heartland Greenway Carbon Storage LLC. (HGCS) seeks to drill and construct a new Class VI CO₂ Injection well, NCV-2, within the Heartland Greenway Storage Site (HGSS) to support CO₂ storage operations and has designed this well construction plan in accordance with 40 CFR §146.86, pursuant to 40 CFR §146.82. HGCS has implemented well design strategies and materials focused on (1) preventing movement of fluids into or between USDWS or into any authorized zones; (2) permitting the use of appropriate testing devices and workover tools and; (3) permit continuous monitoring of the annulus space between the tubing and long string casing. Any necessary changes to this well plan due to logistical or geological conditions encountered within the field will be communicated to the Director prior to well construction. A summary of the spatial location, coordinates and well API/UWI values for NCV-2 are shown below in **Table 4-1**, and general well construction details are detailed below in **Table 4-2**.

Table 4-1. Summary Table of Well Information for NCV-2.

Well Name	Location (LAT/LONG) ±300 ft	API	Operator	Completion Footages	Total Depth
NCV-2	39.626496 / -89.269627	TBD	<i>Heartland Greenway Carbon Storage, LLC</i>	6003-6308	6548

Table 4-2. Summary Table of Generalized Completion Depth Intervals for NCV-2

Casing	T.O.C-Shoe Depth (ft. MD.)	Open Hole Diameter (inches)	Comment
30" Conductor	Sensitive, Confidential, or Privileged Information		Driven or drilled into shallow soils until refusal
20" Surface			Ran through shallow USDWs
13 3/8" Intermediate			Ran through deepest USDW to top of Eau Claire Caprock
9 5/8" Long String			Ran to well terminal depth (Precambrian)

4.2. Proposed Stimulation Program [40 CFR § 146.82(a)(9)]

While not anticipated based on existing interpolations of reservoir quality, a well stimulation program (such as an acid wash) may be proposed by HGCS based on geologic conditions and data identified during drilling and well testing/logging operations. If well stimulation is determined to be required to meet injection goals of the NCV-2 well, HGCS will complete the required stimulation plan [attached to this permit] and communicate the details of the well stimulation program to the Director. HGCS will not proceed with well stimulation operations until approval is received.

4.3. Construction Procedures [40 CFR § 146.82(a)(12)]

The NCV-2 injection well has been designed to accommodate the mass of CO₂ that will be delivered to it, while considering critical characteristics of the CO₂ storage reservoir which affect the well design. Well design principals and materials detailed in subsequent sections were selected and vetted to ensure construction materials have sufficient structural strength to provide sustained mechanical integrity throughout the life of the CCS project in addition to permitting the use of appropriate testing devices, workover tools and continuous monitoring of the annulus space between the injection tubing and long string casing. All well construction materials were selected to be compatible with fluids of which they may be expected to come into contact (e.g., corrosion-resistant cement) and meet or exceed API and ASTM International standards. This plan illustrates the comprehensive analysis performed to comply with and exceed the standards detailed in 40 CFR §146.86 and other related sections (§146.87, 146.88, 146.89, 146.90, 146.94 (a), 146.91), in pursuant to 40 CFR § 146.82 regarding the design of the injection well casing, cement, and wellhead and their relation to subsequent testing, monitoring, and reporting activities.

The construction of the NCV-2 injection well within the Heartland Greenway Storage site will be performed using best practices and will conform to all requirements of Class VI Rule VI at 40 CFR 146.86(b). The drilling of the injection well in this part of the Illinois Basin is straightforward with very few known drilling hazards apart from a possible lost circulation zone in the Potosi formation within the intermediate section of the well. The surface casing will be set to [Sensitive, Confidential, or Privileged Information] and will be cemented to surface so that any shallow USDW aquifers will be protected. A normal [Sensitive, Confidential, or Privileged Information] mud weight will prevent any movement of fluids from one aquifer to another. An intermediate section is planned from the base of the surface casing to the top of the Eau Claire formation which will also cover the St. Peter formation. This section will pass through the Potosi formation, previously recognized as a potential lost circulation zone. If a loss of circulation is encountered, lost circulation materials will be used to regain circulation. If lost circulation materials are not successful, cement plugs will be placed across the zone to enable the well to be drilled to casing point. The intermediate casing will be cemented in two stages with the first stage covering from T.D. at the top of the Eau Claire formation to just above the Potosi formation. The well will be circulated until the first stage cement is set through a stage collar and then the second stage will place cement from the stage collar to surface. The T.D. section will then be drilled through the Eau Claire formation, through the Mt. Simon formation and reaching total depth in basement rocks. The long string casing will then be cemented from T.D. back to surface. While drilling each section of the well the deviation will be checked to ensure that the well stays as close to vertical as possible with the deviation staying below five degrees and no section of the well will have a dog-leg severity greater than [Sensitive, Confidential, or Privileged Information]. Should a deviation correction be required directional drilling tools will be employed. There are no known abnormal pressure formation in this area so mud weights [Sensitive, Confidential, or Privileged Information] will provide well control. The casing and cements to be used in construction of the NCV-2 well will be compatible with the injected CO₂. A minimum of CR-13 casing will be used across the injection zone and caprock and on the lower section of the intermediate casing. This design has been confirmed with manufacturer testing performed to ASTM and Corrosion Standards. Cement across these sections will be CO₂ resistant as shown by API and ASTM testing.

The targeted injection formation will be tested prior to final completion by step-rate testing and pressure fall-off testing. These tests will confirm that the proposed injection zone will be able to receive the required volume of CO₂ while injection pressures will stay below fracturing pressure. The injection tubing will be a minimum of CR-13 and will be sized to accommodate the expected injection rate. The size of the wellbore will allow monitoring equipment to be placed in the wellbore so that injection and annular pressure can be monitored. The tubing will also be sized such that surveillance logging can be accommodated. More detail of the well construction methods and materials will be found in the following sections.

4.4. Maximum Wellhead Injection Pressure

A nodal analysis was conducted to determine the injection tubing diameter for the NCV-2 CO₂ injection well. Nodal analysis identifies the operating point where inflow at the top of the well and outflow at the bottom of the well match for different sizes of tubing, allowing a tubing size to be selected that meets the project needs of approximately one million metric tons per year (2740 metric tons per day) injected per well on average and a maximum rate of 1.34 million metric tons per year (3671 metric tons per day). Schlumberger's PIPESIM software was used to size the injection tubing.

Sensitive, Confidential, or Privileged Information



Table 4-3. NCV-2 Parameters Used in the Nodal Analysis Simulation

Nodal Analysis Assumption	Value
Long Casing Size	Sensitive, Confidential, or Privileged Information
Perforation Zone	
Perforation Specifics	
Reservoir Temperature	
Permeability	
Reservoir pressure gradient	
Wellhead Pressure	

Sensitive, Confidential, or Privileged Information

Figure 4-1. Nodal analysis results showing the operating points for the three tubing sizes modelled.

The results of the nodal analysis were used to update the PIPESIM flow model to have a 13 3/8 inch 61 lb/ft intermediate casing set at 4948 ft and a 9 5/8 inch 47 lb/ft long-string casing set at 6431 ft that contains a 5 1/2 inch 17lb/ft with a packer set at 5900 ft. This design is illustrated in **Figure 4-2** below. Using this design injection was modeled and the results for both the maximum rate (**Figure 4-3**) and average rate (**Figure 4-4**) show that 5 1/2 17 lb/ft tubing will meet the project requirements.

Sensitive, Confidential, or Privileged Information




Figure 4-2. Tubing and casing design based on the nodal analysis results.

Sensitive, Confidential, or Privileged Information

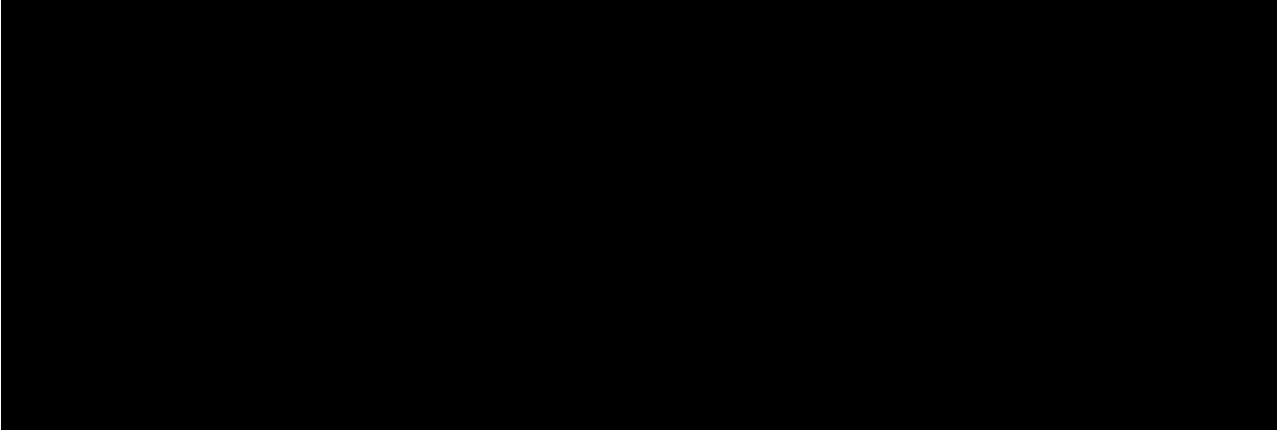


Figure 4-3. Pressure versus depth for injection of the maximum injection rate with wellhead pressure set to 1200 psi.

Sensitive, Confidential, or Privileged Information




Figure 4-4. Pressure versus depth for injection of the average injection rate with wellhead pressure set to 1200 psi.

4.5. Casing Program

The NCV-2 injection well design has been developed to accommodate a 5 1/2-inch outer diameter (OD) tubing string, based on the nodal analysis presented in the previous section and was designed to accommodate the concentric casing sizes required to isolate the injection reservoir from USDWs and prevent fluid flow into any unauthorized zones. In accordance with 40 CFR § 146.86, the casing program was designed while considering the following factors:

- 1) Depth to the injection zone;
- 2) Injection pressure, external pressure, internal pressure, and axial loading;
- 3) Hole sizes;
- 4) Size and grade of all casing strings (wall thickness, external diameter, nominal weight, length, joint specification, and construction material);
- 5) Corrosiveness of the CO₂ stream and formation fluids;
- 6) Downhole temperatures;
- 7) Lithology of injection and confining zones;
- 8) Type or grade of cement and cement additives;
- 9) Quantity, chemical composition, and temperature of the CO₂ stream;

In accordance with 40 CFR §146.87, prior to running each casing string, all open-hole logging and testing operations (deviation surveys, open hole logging, formation testing) will be completed. Please see the *Pre-operations Formation Testing section* of this permit for a detailed breakdown of which specific methods and tools will be utilized for the well.

To prevent unintended fluid migration and protect USDW integrity, the surface casing string will extend through shallow USDWs, the intermediate casing string will extend through the lowermost USDW aquifer (St. Peter Sandstone), and the long string casing will extend from the surface through the injection interval with a sufficient number of centralizers. All casing strings will be cemented in place to the surface in one or more stages (see the cementing program below for additional detail).

The metallurgy for each casing string was selected to be compatible with the fluids and stresses encountered within the well and meet or exceed API and ASTM standards. Sensitive, Confidential, or Privileged Information



Casing loadings were modelled using Schlumberger's Tubing Design and Analysis (TDAS) software. To ensure sufficient structural strength and mechanical integrity throughout the life of the HGSS project, stresses were analyzed and calculated according to worst-case scenarios and tubular specifications were selected accordingly. Minimum design factors are presented in **Table**

4-4. Table 4-5 through Table 4-8 below summarize the results of this stress analysis. The burst, collapse, and tensile strength of each tubular was calculated according to the scenarios defined below and was dependent on fracture gradients, mud weight, depths, and minimum safety factors.

As demonstrated, these safety factors are sufficient in the worst-case scenarios to prevent migration of fluids into or out of USDWs or unauthorized zones. The casing and tubing materials are designed to be compatible with the fluids encountered and the stresses induced throughout the sequestration project. Schlumberger Integrated Drilling Systems design standards were incorporated for the casing design calculations, and Schlumberger Completions group standards were incorporated for the tubing design calculations.

Table 4-4. Minimum Design Factors.

Load	Casing Design Criteria	Tubing Design Criteria
Burst	Sensitive, Confidential, or Privileged Information	
Collapse		
Tension		
Compression		
VME		

The casing installed in any well should be designed to withstand collapse loading based on the following assumption:

1. The hydrostatic head of the drilling fluid in which the casing is run acts on the exterior of the casing at any given depth;
2. Subject to the casing is 1/3 evacuated;
3. The production casing is completely evacuated;
4. The effect of axial stresses on collapse resistance shall be considered; and
5. The effect of temperature deration and casing wear shall be considered.

Any casing/liner that creates an annular space with the production tubing shall be treated as a production casing/liner. The casing installed in any well shall be designed to withstand tensile loading based on the following assumptions:

1. The weight of casing is its weight in air; and
2. The tensile strength of the casing is the yield strength of the casing wall or of the joint, whichever is the lesser.

The following additional assumptions were made during the design process for the Injection wells:

1. A 5% casing wear due to Bottomhole Assembly (BHA) rotation is assumed on all casing design segments with consecutive hole sections;

2. Wall tolerance of 87.5% is assumed as per API standards;
3. Temperature deration is considered on the design of the 13-3/8-inch and 9-5/8- inch casing strings; and
4. The 13-3/8-inch casing is being proposed and engineered to be required to comply with a casing design to pass a 1/3 evacuation loading on collapse.

If the casing recommended is not available, final casing selection would be based on what other technical options are currently available and what might in stock in US-based tubular suppliers' inventory. The minimum criteria for an alternate design would be to exceed standard design criteria.

Table 4-5. Surface Casing Load Scenarios Evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information	
1	2
3	4
5	6
7	8
9	10
11	12
13	14
15	16
17	18
19	20
21	22
23	24
25	26
27	28
29	30
31	32
33	34
35	36
37	38
39	40
41	42
43	44
45	46
47	48
49	50
51	52
53	54
55	56
57	58
59	60
61	62
63	64
65	66
67	68
69	70
71	72
73	74
75	76
77	78
79	80
81	82
83	84
85	86
87	88
89	90
91	92
93	94
95	96
97	98
99	100
101	102
103	104
105	106
107	108
109	110
111	112
113	114
115	116
117	118
119	120
121	122
123	124
125	126
127	128
129	130
131	132
133	134
135	136
137	138
139	140
141	142
143	144
145	146
147	148
149	150
151	152
153	154
155	156
157	158
159	160
161	162
163	164
165	166
167	168
169	170
171	172
173	174
175	176
177	178
179	180
181	182
183	184
185	186
187	188
189	190
191	192
193	194
195	196
197	198
199	200
201	202
203	204
205	206
207	208
209	210
211	212
213	214
215	216
217	218
219	220
221	222
223	224
225	226
227	228
229	230
231	232
233	234
235	236
237	238
239	240
241	242
243	244
245	246
247	248
249	250
251	252
253	254
255	256
257	258
259	260
261	262
263	264
265	266
267	268
269	270
271	272
273	274
275	276
277	278
279	280
281	282
283	284
285	286
287	288
289	290
291	292
293	294
295	296
297	298
299	300
301	302
303	304
305	306
307	308
309	310
311	312
313	314
315	316
317	318
319	320
321	322
323	324
325	326
327	328
329	330
331	332
333	334
335	336
337	338
339	340
341	342
343	344
345	346
347	348
349	350
351	352
353	354
355	356
357	358
359	360
361	362
363	364
365	366
367	368
369	370
371	372
373	374
375	376
377	378
379	380
381	382
383	384
385	386
387	388
389	390
391	392
393	394
395	396
397	398
399	400
401	402
403	404
405	406
407	408
409	410
411	412
413	414
415	416
417	418
419	420
421	422
423	424
425	426
427	428
429	430
431	432
433	434
435	436
437	438
439	440
441	442
443	444
445	446
447	448
449	450
451	452
453	454
455	456
457	458
459	460
461	462
463	464
465	466
467	468
469	470
471	472
473	474
475	476
477	478
479	480
481	482
483	484
485	486
487	488
489	490
491	492
493	494
495	496
497	498
499	500
501	502
503	504
505	506
507	508
509	510
511	512
513	514
515	516
517	518
519	520
521	522
523	524
525	526
527	528
529	530
531	532
533	534
535	536
537	538
539	540
541	542
543	544
545	546
547	548
549	550
551	552
553	554
555	556
557	558
559	560
561	562
563	564
565	566
567	568
569	570
571	572
573	574
575	576
577	578
579	580
581	582
583	584
585	586
587	588
589	590
591	592
593	594
595	596
597	598
599	600
601	602
603	604
605	606
607	608
609	610
611	612
613	614
615	616
617	618
619	620
621	622
623	624
625	626
627	628
629	630
631	632
633	634
635	636
637	638
639	640
641	642
643	644
645	646
647	648
649	650
651	652
653	654
655	656
657	658
659	660
661	662
663	664
665	666
667	668
669	670
671	672
673	674
675	676
677	678
679	680
681	682
683	684
685	686
687	688
689	690
691	692
693	694
695	696
697	698
699	700
701	702
703	704
705	706
707	708
709	710
711	712
713	714
715	716
717	718
719	720
721	722
723	724
725	726
727	728
729	730
731	732
733	734
735	736
737	738
739	740
741	742
743	744
745	746
747	748
749	750
751	752
753	754
755	756
757	758
759	760
761	762
763	764
765	766
767	768
769	770
771	772
773	774
775	776
777	778
779	780
781	782
783	784
785	786
787	788
789	790
791	792
793	794
795	796
797	798
799	800
801	802
803	804
805	806
807	808
809	810
811	812
813	814
815	816
817	818
819	820
821	822
823	824
825	826
827	828
829	830
831	832
833	834
835	836
837	838
839	840
841	842
843	844
845	846
847	848
849	850
851	852
853	854
855	856
857	858
859	860
861	862
863	864
865	866
867	868
869	870
871	872
873	874
875	876
877	878
879	880
881	882
883	884
885	886
887	888
889	890
891	892
893	894
895	896
897	898
899	900
901	902
903	904
905	906
907	908
909	910
911	912
913	914
915	916
917	918
919	920
921	922
923	924
925	926
927	928
929	930
931	932
933	934
935	936
937	938
939	940
941	942
943	944
945	946
947	948
949	950
951	952
953	954
955	956
957	958
959	960
961	962
963	964
965	966
967	968
969	970
971	972
973	974
975	976
977	978
979	980
981	982
983	984
985	986
987	988
989	990
991	992
993	994
995	996
997	998
999	1000

Table 4-6. Intermediate Casing Load Scenarios Evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information

Table 4-7. Long-String Casing Load Scenarios evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information

Table 4-8. Tubing load scenarios evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information

4.5.1. Casing Summary

Sensitive, Confidential, or Privileged Information

Please refer to

Table 4-11. Specifications of the Anticipated CO₂ Stream Composition

Component	Specification	Unit
Minimum CO ₂	98	mole%, dry basis
Water content	< / = 20	lb/MMscf
Impurities (dry basis):		
Total Hydrocarbons	< / = 2	mol%
Inert Gases (N ₂ , Ar, O ₂)	< / = 2	mol%
Hydrogen	< / = 1	mol%
Alcohols, aldehydes, esters	< / = 500	ppmv
Hydrogen Sulfide	< / = 100	ppmv
Total Sulfur	< / = 100	ppmv
Oxygen	< / = 100	ppmv
Carbon monoxide	< / = 100	ppmv
Glycol	< / = 1	ppmv

below for a summary of the properties and placement of casing strings within the casing program. All casing strings will be cemented to the surface in one or more stages in accordance with 40 CFR §146.86. The borehole diameters are considered conventional sizes for the sizes of casing that will be used and should allow ample clearance between the outside of the casing and the borehole wall to ensure that a continuous cement seal can be emplaced along the entire length of the casing string. Each section of the well is discussed in a separate subsection below.

4.5.2. Conductor Casing

The conductor casing consists of ~~Sensitive, Confidential, or Privileged Information~~ carbon steel pipe which will provide the stable base required for drilling activities in unconsolidated sediment. Depending on wellsite conditions, the conductor casing will be driven or drilled into shallow soils until striking bedrock

or casing can advance no further below the ground surface. The conductor casing will then be cemented in place.

4.5.3. *Surface Casing*

The surface casing consists of Sensitive, Confidential, or Privileged Information pipe with buttress thread couplings (BTC). The metallurgy of this casing string will be carbon steel and the surface casing string will be cemented to the surface. Prior to running the surface casing downhole, all appropriate logging and testing operations will be completed. The surface string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing* section of this permit for further details.

4.5.4. *Intermediate Casing*

The intermediate casing consists of Sensitive, Confidential, or Privileged Information pipe with BTC couplings. The intermediate string will extend from the ground surface to the top of the confining zone (Eau Claire). The metallurgy of this casing string will be carbon steel and the intermediate casing string will be cemented to the surface to isolate and protect USDW zones. Prior to running the intermediate casing downhole, all appropriate logging and testing operations will be completed. The intermediate string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing* section of this permit for further details.

4.5.5. *Long String Casing*

The long-string casing will be Sensitive, Confidential, or Privileged Information pipe composed of two sections. The uppermost section will extend from the ground surface to 500-feet from the top of the confining unit (Eau Claire) and will be comprised of Sensitive, Confidential, or Privileged Information carbon steel pipe with either long thread coupling (LTC) or BTC connections. Sensitive, Confidential, or Privileged Information



Upon selection of the proprietary seal type, the seal type will be communicated to the Director and HGCS will utilize such seal pending approval from the Director. Prior to running the intermediate casing downhole, all appropriate logging and testing operations will be completed. The long string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent

fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing Section* of this permit for further details.

4.6. Injection Well Tubing and Packer Program

The tubing connects the injection zone to the wellhead, providing a pathway for safely injecting and storing CO₂. In accordance with 40 CFR § 146.86 (c), the tubing and packer material used for construction of the NCV-2 injection well will be compatible with fluids with which the material may be expected to come into contact with and will meet or exceed API and ASTM international standards. HGCS will inject CO₂ through corrosion-resistant tubing with a packer set at a depth opposite a cemented interval a location approved by the Director. While selecting the tubing and packers for the NCV-2 injection, the following factors were taken into consideration:

1. Depth of setting;
2. Characteristics of the CO₂ stream (chemical content, corrosiveness, temperature, and density) and formation fluids;
3. Maximum proposed injection pressure;
4. Maximum proposed annular pressure;
5. Proposed injection rate (intermittent or continuous) and volume and/or mass of the CO₂ stream;
6. Size of tubing and casing; and
7. Tubing tensile strength, burst and collapse pressures.

A summary of these factors is available in **Table 4-10, Table 4-11, and Table 4-12**. Any change to the tubing and packer specifics detailed in the below will be communicated to the Director.

Sensitive, Confidential, or Privileged Information

A series of seven horizontal black bars of varying lengths, with the text "Sensitive, Confidential, or Privileged Information" in red centered above them.

The annulus between the tubing and long-string casing will be filled with noncorrosive fluid described in further detail within the annular fluid program in Section 4.8 below.

Table 4-9. HGSS Injection Well Casing Program and Properties of Materials.

Sensitive, Confidential, or Privileged Information

Table 4-10. Required Specifications for Tubing and Packer Selection and Placement (§146.86(c))

Parameter	Attribute	
Characteristics of the CO ₂ Stream	Chemical Content	Please refer to Table 4-11 below.
	Corrosiveness	<i>Stream will contain <50ppm of water and likely not to cause CO₂-driven corrosion</i>
	Temperature	50 °F (At wellhead) 131°F (Injection Zone)
	Density	57.26 lb/ft ³ (at wellhead, under 1400 psi) 49.65 lb/ft ³ (at injection zone, under 3,395 psi)
Characteristics of Formation Fluids (Mount Simon Reservoir)	Temperature	131 °F
	Formation Pressure	2,634 psi
	Fluid Density	68.5 lb/ft ³
	Salinity	160,000 Mg/L
Maximum Proposed Injection Pressure (Downhole)	3,778 psi	
Maximum Proposed Annular Pressure	4,028 psi	
Average Proposed Injection Rate (CO ₂)	2,740 Metric Tons/day	
Volume of CO ₂ Stream	53 MMCF/day	

Table 4-11. Specifications of the Anticipated CO₂ Stream Composition

Component	Specification	Unit
Minimum CO ₂	98	mole%, dry basis
Water content	< / = 20	lb/MMscf
Impurities (dry basis):		
Total Hydrocarbons	< / = 2	mol%
Inert Gases (N ₂ , Ar, O ₂)	< / = 2	mol%
Hydrogen	< / = 1	mol%
Alcohols, aldehydes, esters	< / = 500	ppmv
Hydrogen Sulfide	< / = 100	ppmv
Total Sulfur	< / = 100	ppmv
Oxygen	< / = 100	ppmv
Carbon monoxide	< / = 100	ppmv
Glycol	< / = 1	ppmv

Table 4-12. Tubing and Packer Details.

Item	Setting Depth (Approximate)	Tensile Strength (psi)	Burst Strength (psi)	Collapse Strength (psi)	Material (weight/grade/connection)
Tubing					Sensitive, Confidential, or Privileged Information
<i>Packer</i> (Baker Hughes Model F Permanent Packer)					

***Setting depth interval is dependent on geological conditions observed in the field and is subject to change.**

** JFEBEAR™ or similar premium connection

4.7. Injection Well Cementing Program

This section discusses the types and quantities of cement that will be used for each string of casing during construction of the HGSS NCV-2 injection well. In accordance with 40 CFR §146.86, the cement and cement additives were designed to have sufficient quality and quantity to maintain seal integrity throughout the life of the HGSS project and are compatible with the fluids (CO₂ stream and formation fluids) with which the materials may be expected to come into contact and meet or exceed API and ASTM standards. The cementing program has been designed to prevent the movement of fluids out of the sequestration zone into overlying USDWs. The cementing program was designed while considering the following critical factors:


1. Depth to the sequestration zone;
2. Injection pressure, external pressure, internal pressure, and axial loading;
3. Hole sizes;
4. Size and grade of all casing strings (wall thickness, external diameter, nominal weight, length, joint specification, and construction material);
5. Corrosiveness of the CO₂ stream and formation fluids;
6. Downhole temperatures;
7. Lithology of sequestration and confining zones;
8. Type or grade of cement and cement additives; and
9. Quantity, chemical composition, and temperature of the CO₂ stream.

After cementing each casing string to the surface, the integrity and location of cement will be verified using a cement-bond log capable of evaluating the cemental quality radially and identifying the presence/location of channels to ensure against the likelihood of unintended release of CO₂ from the sequestration zone into the storage complex. Please refer to the pre-operational formation testing plan for further details. Any changes to the cement program will be communicated to the Director prior to well construction operations.

Table 4-13 below features the cement types, cement additives, quantities, and staging depths for each casing string. Each casing string will be cemented to the surface in one or more stages using the balance method. A sufficient number of casing centralizers will be used on all casing strings to centralize the casing in the hole and help ensure that cement completely surrounds the casing along the entire length of pipe. Except for the conductor casing, a guide shoe or float shoe will be run on the bottom of the bottom joint of casing and a float collar will be run on the top of the bottom joint of casing.

Due to the technical challenges involving cementing within geologic formations such as the Potosi Dolomite, the intermediate casing string of each HGSS injection well will be cemented in two stages. To facilitate a two-stage cement job, a multiple-stage cementing tool will be installed approximately 200 ft above the top of the Potosi Formation. After the completion of the first-stage cement job for the intermediate casing string, the multiple-stage cementing tool will be opened and fluid will be circulated down the casing and up the annulus above the cementing tool for a minimum of 8 hours to allow the first-stage cement job to acquire sufficient gel strength.

Sensitive, Confidential, or Privileged Information



Additionally, the excess space (“rathole”) from the top of the Argenta to the well’s terminal depth will be plugged back with EverCRETE to avoid unintended pressure transmission from the injection zone into the basement or near-basement zones. This will be likely be accomplished by setting the float shoe just above the top of the Argenta during long string cementing operations, however other methods may be considered. After an appropriate amount of setting time, cement-bond logs will be run and analyzed for each casing string as detailed in *Pre-operations Formation Testing Plan*.

Table 4-13. Specifications of the HGSS Cementing Program.


Sensitive, Confidential, or Privileged Information

4.8. Injection Well Annular Fluid

The annular space above the packer between the 9 5/8-inch long-string casing and the 5 1/2-inch injection tubing will be filled with a non-corrosive fluid to provide a positive pressure differential to stabilize the injection tubing and inhibit corrosion. The annular fluid will be a dilute salt solution such as potassium chloride (KCl), sodium chloride (NaCl), calcium chloride (CaCl₂), or similar solution. The fluid will be mixed onsite from dry salt and good quality (clean) freshwater, or it will be acquired pre-mixed. The fluid will also be filtered to ensure that solids do not interfere with the packer or other components of the annular protection system. The final choice of the type of fluid will depend on availability.

The annulus fluid will contain additives and inhibitors including a corrosion inhibitor, biocide (to prevent growth of harmful bacteria), and an oxygen scavenger. Example additives and inhibitors are listed below along with approximate mix rates:

Sensitive, Confidential, or Privileged Information

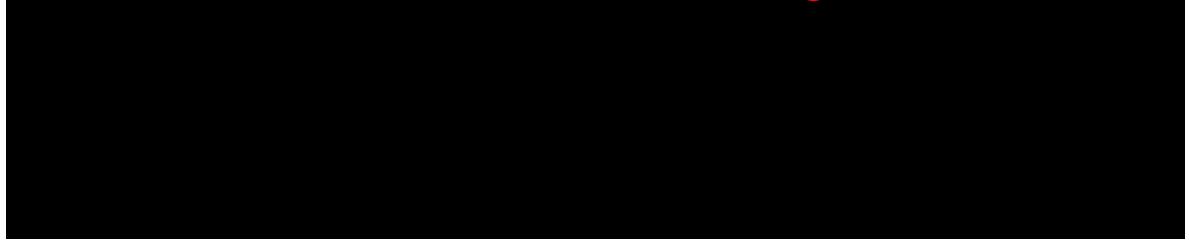

These products recommendations were provided by Tetra Technologies, Inc., of Houston, Texas. Actual products may vary from those described above.

4.9. Injection Wellhead and Valve Program

This section details the specifications of the injection wellheads and valves to be used for the NCV-2 injection well. All wellheads, valves, piping and surface facilities have been designed to meet or exceed API and ASTM international standards for the maximum anticipated injection pressure and will be maintained in a safe and leak-free condition. HGCS will equip all ports on the wellhead assembly above the casing bowl of injection wells with valves, blind flanges, or similar equipment. HGCS will also equip the injection well with valves to provide isolation of wells from the pipeline system and allow entry into the wells.

The HGSS NCV-2 injection wellhead will consist of the following components, from bottom to top:

Sensitive, Confidential, or Privileged Information



Sensitive, Confidential, or Privileged Information



The wellhead and Christmas tree will be composed of materials that are designed to be compatible with the injection fluid upon which the material may be expected to come into contact with. All components that encounter the CO₂ injection fluid will be made of a corrosion-resistant alloy such as stainless steel. Because the CO₂ injection fluid will be very dry, use of stainless-steel components for the flow-wetted components is a conservative measure to minimize corrosion and increase the life expectancy of this equipment. Materials that will not have contact with the injection fluid, such as the surface casing and shallow portion of the long string, will be manufactured of carbon steel. A preliminary materials specification for the wellhead and Christmas tree assembly is described in **Table 4-14** using material classes as defined in American Petroleum Institute (API) Specification 6A (Specification for Wellhead and Christmas Tree Equipment). A summary of material class definitions is provided in **Table 4-15**. The final wellhead and Christmas tree materials specification may vary slightly from the information given below because neither has been selected yet. A generalized illustration of the wellhead and Christmas tree is provided in **Figure 4-5**. If any changes are made to the wellhead and valve program, HGSC will communicate these changes to the Director and will finalize program specifics upon approval from the Director.

Table 4-14. Materials Specification of Wellhead and Christmas Tree.

Sensitive, Confidential, or Privileged Information	
AA – General Service	Sensitive, Confidential, or Privileged Information
BB – General Service	
CC – General Service	
DD – Sour Service ^(a)	
EE – Sour Service ^(a)	
FF – Sour Service ^(a)	
HH – Sour Service ^(a)	

Table 4-15. Material Classes from API 6A (Spec. for Wellhead and Christmas Tree Equipment).

API Material Class	Body, Bonnet, End & Outlet Connections	Pressure Controlling Parts, Stems, & Mandrel Hangers
AA – General Service	Sensitive, Confidential, or Privileged Information	
BB – General Service		
CC – General Service		
DD – Sour Service ^(a)		
EE – Sour Service ^(a)		
FF – Sour Service ^(a)		
HH – Sour Service ^(a)		

Source: Cameron Surface Systems, Houston, Texas

(a) As defined by National Association of Corrosion Engineers (NACE) Standard MR075.

(b) In compliance with NACE Standard MR0175.

Sensitive, Confidential, or Privileged Information




Figure 4-5. A design schematic of the HGSS injection wellhead and Christmas tree used for the NCV-2 CO₂ injection well.

4.10. Injection Well Routine Maintenance

HGCS will perform routine well maintenance on all injection wells. Routine maintenance will consist of wellhead valve maintenance and a review of recorded casing annular pressure measurements. If a significant deviation is noted (such that the mechanical integrity of the well is comprised or may become compromised), the appropriate remediation plan will be triggered. Please see the *Injection Well Operational Plan* and the *Emergency and Remedial Response Plan* sections for additional details.

4.11. Injection Well Perforation Program

The long-string casing will be perforated across the Mount Simon Sandstone with deep-penetrating shaped charges. The exact perforation interval will be determined after the well is drilled and characterized with geophysical logging/formation testing techniques. Sensitive, Confidential, or Privileged Information



4.12. Summary of Monitoring Technologies Deployed in Injection Wells

To meet monitoring and operational requirements of 40 CFR §146.90 and §146.88, several technologies will be deployed within-and-around the NCV-2 injection well to monitor critical parameters needed to ensure sustained integrity of the HGSS storage complex and protection of overlying USDWs. **Table 4-16** below details the suite of monitoring technologies that will be deployed directly within or around injection wellbore and surface injection wellhead/tree assemblies. Please refer to the testing and monitoring section of this permit for a more detailed breakdown of the HGSS monitoring network, monitoring technologies and monitoring strategies.

Table 4-16. *Technologies Deployed in NCV-2 Injection Well for Monitoring Purposes

Device(s)	Location	Purpose	Monitoring category
Wellhead Pressure-Temperature Gauge	<small>Sensitive, Confidential, or Privileged Information</small>	Wellhead Injection Pressure and temperature	CO ₂ Injection Process Monitoring
Downhole Pressure - Temperature Gauge		Reservoir & Bottom-Hole Pressure/Temperature	
Continuous Annular Pressure Gauge		Annular Pressure Monitoring	


Device(s)	Location	Purpose	Monitoring category
Downhole Pressure-Temperature Gauge	<small>Sensitive, Confidential, or Privileged Information</small>	Annular Pressure Monitoring	
Distributed Temperature Sensing (DTS)		Distributed Temperature Monitoring (Reservoir, Upper Mt. Simon, Eau Claire, Argenta, Precambrian Basement)	CO ₂ Injection Process Monitoring & In-direct Plume Monitoring
Daniel Sr Orifice Mass Flow Meter		Injection Rate and Volume	CO ₂ Injection Process Monitoring
Distributed Acoustic Sensing Fiber Optics (DAS)		3D/4D VSP & Microseismic	In-direct Plume Monitoring & Seismicity Monitoring
Boreal Laser Gas Detection System		Leak Detection	Surface or Near Surface Monitoring

*Note this list of technology does not encompass all monitoring technologies deployed within the HGSS monitoring network; please refer to the testing and monitoring section for a detailed breakdown of the HGSS monitoring network and strategy.

4.13. Schematic of the Subsurface Construction Details of the HGSS Injection Wells

A generalized schematic of the HGSS NCV-2 injection well is shown in **Figure 4-6**. As discussed in the previous sections, the injection well will include the following casing strings:

Sensitive, Confidential, or Privileged Information

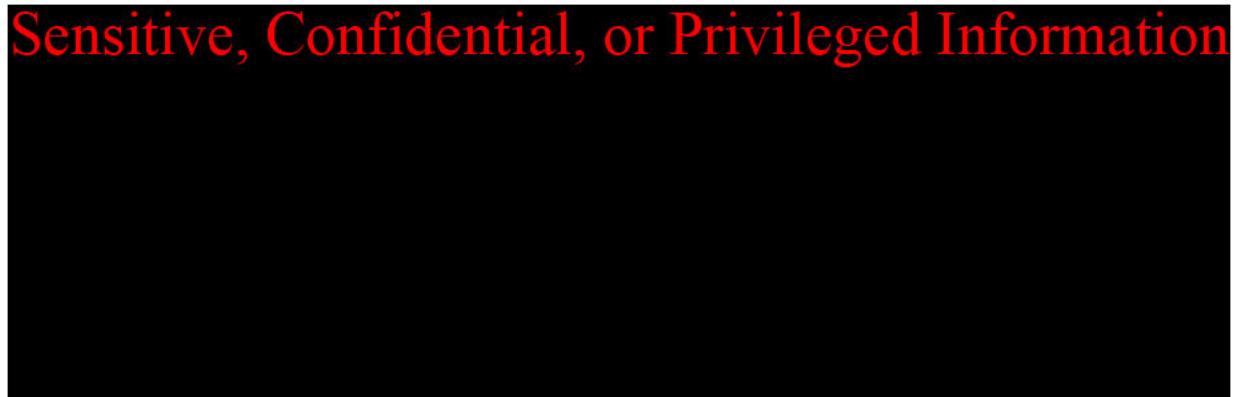

All depths are preliminary and will be adjusted based on additional characterization data obtained while drilling the CO₂ injection wells. The conductor, surface, intermediate, and long casing strings will be cemented to surface in accordance with 40 CFR § 146.86. The purpose of the conductor string is to provide a stable borehole across the near-surface, unconsolidated glacial deposits before drilling the remaining deeper casing strings and to help protect the

USDWs. Groundwater in the vicinity of the site is normally obtained from sand and gravel deposits that are contained within the unconsolidated Quaternary-aged material above bedrock. According to the Illinois Geological Survey ILWATER map, unconsolidated sand, and gravel deposits within the vicinity of the proposed site can range in depth from about 0 to 500 ft bgs and bedrock can range in depth from 400-600 feet bgs. The surface string will extend across the uppermost bedrock layers (Pennsylvanian age) and will help to further isolate and protect the USDWs. The intermediate casing string will extend across and isolate deeper potentially unstable layers or layers where there is potential for lost circulation to ensure that the well can be drilled to total depth, in addition to isolating and protecting the deeper USDWs (St. Peter Sandstone).

Sensitive, Confidential, or Privileged Information



Sensitive, Confidential, or Privileged Information




Figure 4-6. Design schematic of HGSS NCV-2 CO₂ injection well.

TABLE OF CONTENTS

4 INJECTION WELL CONSTRUCTION PLAN.....	3
Facility Information	3
4.1. Injection Well Construction Overview	3
4.2. Proposed Stimulation Program [40 CFR § 146.82(a)(9)]	4
4.3. Construction Procedures [40 CFR § 146.82(a)(12)]	4
4.4. Maximum Wellhead Injection Pressure.....	5
4.5. Casing Program.....	10
4.6. Injection Well Tubing and Packer Program.....	19
4.7. Injection Well Cementing Program	22
4.8. Injection Well Annular Fluid	25
4.9. Injection Wellhead and Valve Program	25
4.10. Injection Well Routine Maintenance	29
4.11. Injection Well Perforation Program	29
4.12. Summary of Monitoring Technologies Deployed in Injection Wells.....	29
4.13. Schematic of the Subsurface Construction Details of the HGSS Injection Wells	30

LIST OF FIGURES

Figure 4-1. Nodal analysis results showing the operating points for the three tubing sizes modelled.....	7
Figure 4-2. Tubing and casing design based on the nodal analysis results.....	8
Figure 4-3. Pressure versus depth for injection of the maximum injection rate with wellhead pressure set to 1200 psi.....	9
Figure 4-4. Pressure versus depth for injection of the average injection rate with wellhead pressure set to 1200 psi.....	9
Figure 4-5. A design schematic of the HGSS injection wellhead and Christmas tree used for the NCV-3 CO ₂ injection well.....	29
Figure 4-6. Design schematic of HGSS NCV-3 CO ₂ injection well.	32

LIST OF TABLES

Table 4-1. Summary Table of Well Information for NCV-3.....	3
Table 4-2. Summary Table of Generalized Completion Depth Intervals for NCV-3.....	4
Table 4-3. NCV-3 Parameters Used in the Nodal Analysis Simulation.....	6
Table 4-4. Minimum Design Factors	11

Table 4-5. Surface Casing Load Scenarios Evaluated showing the design factors for each scenario.....	13
Table 4-6. Intermediate Casing Load Scenarios Evaluated showing the design factors for each scenario.....	14
Table 4-7. Long-String Casing Load Scenarios evaluated showing the design factors for each scenario.....	15
Table 4-8. Tubing load scenarios evaluated showing the design factors for each scenario.	16
Table 4-9. HGSS Injection Well Casing Program and Properties of Materials.....	20
Table 4-10. Required Specifications for Tubing and Packer Selection and Placement (§146.86(c))	21
Table 4-11. Specifications of the Anticipated CO ₂ Stream Composition.....	21
Table 4-12. Tubing and Packer Details.....	22
Table 4-13. Specifications of the HGSS Cementing Program.....	24
Table 4-14. Materials Specification of Wellhead and Christmas Tree.....	26
Table 4-15. Material Classes from API 6A (Spec. for Wellhead and Christmas Tree Equipment).	27
Table 4-16. *Technologies Deployed in NCV-3 Injection Well for Monitoring Purposes.....	29

4 INJECTION WELL CONSTRUCTION PLAN
40 CFR 146.82(a) (9), (11), (12)

Heartland Greenway Storage Site NCV-3 Injection Well

Facility Information

Facility name: Heartland Greenway Storage Site (HGSS)
NCV-3

Facility Operator: Heartland Greenway Carbon Storage, LLC (HGCS)

Facility Contact: David Giles, President and COO
2626 Cole Ave., Dallas, Texas, USA 75204
Phone: (210) 880-6000; Email: dgiles@navco2.com

Project Location: Taylorville, Christian County, Illinois
39.647516 / -89.269584

4.1. Injection Well Construction Overview

Heartland Greenway Carbon Storage LLC. (HGCS) seeks to drill and construct a new Class VI CO₂ Injection well, NCV-3, within the Heartland Greenway Storage Site (HGSS) to support CO₂ storage operations and has designed this well construction plan in accordance with 40 CFR §146.86, pursuant to 40 CFR §146.82. HGCS has implemented well design strategies and materials focused on (1) preventing movement of fluids into or between USDWS or into any authorized zones; (2) permitting the use of appropriate testing devices and workover tools and; (3) permit continuous monitoring of the annulus space between the tubing and long string casing. Any necessary changes to this well plan due to logistical or geological conditions encountered within the field will be communicated to the Director prior to well construction. A summary of the spatial location, coordinates and well API/UWI values for NCV-3 are shown below in **Table 4-1**, and general well construction details are detailed below in **Table 4-2**.

Table 4-1. Summary Table of Well Information for NCV-3.

Well Name	Location (LAT/LONG) ±300 ft	API	Operator	Completion Footages	Total Depth
NCV-3	39.647516 / -89.269584	TBD	<i>Heartland Greenway Carbon Storage, LLC</i>	5964-6268	6508

Table 4-2. Summary Table of Generalized Completion Depth Intervals for NCV-3

Casing	T.O.C-Shoe Depth (ft. MD.)	Open Hole Diameter (inches)	Comment
30" Conductor	Sensitive, Confidential, or Privileged Information		Driven or drilled into shallow soils until refusal
20" Surface			Ran through shallow USDWs
13 3/8" Intermediate			Ran through deepest USDW to top of Eau Claire Caprock
9 5/8" Long String			Ran to well terminal depth (Precambrian)

4.2. Proposed Stimulation Program [40 CFR § 146.82(a)(9)]

While not anticipated based on existing interpolations of reservoir quality, a well stimulation program (such as an acid wash) may be proposed by HGCS based on geologic conditions and data identified during drilling and well testing/logging operations. If well stimulation is determined to be required to meet injection goals of the NCV-3 well, HGCS will complete the required stimulation plan [attached to this permit] and communicate the details of the well stimulation program to the Director. HGCS will not proceed with well stimulation operations until approval is received.

4.3. Construction Procedures [40 CFR § 146.82(a)(12)]

The NCV-3 injection well has been designed to accommodate the mass of CO₂ that will be delivered to it, while considering critical characteristics of the CO₂ storage reservoir which affect the well design. Well design principals and materials detailed in subsequent sections were selected and vetted to ensure construction materials have sufficient structural strength to provide sustained mechanical integrity throughout the life of the CCS project in addition to permitting the use of appropriate testing devices, workover tools and continuous monitoring of the annulus space between the injection tubing and long string casing. All well construction materials were selected to be compatible with fluids of which they may be expected to come into contact (e.g., corrosion-resistant cement) and meet or exceed API and ASTM International standards. This plan illustrates the comprehensive analysis performed to comply with and exceed the standards detailed in 40 CFR §146.86 and other related sections (§146.87, 146.88, 146.89, 146.90, 146.94 (a), 146.91), in pursuant to 40 CFR § 146.82 regarding the design of the injection well casing, cement, and wellhead and their relation to subsequent testing, monitoring, and reporting activities.

The construction of the NCV-3 injection well within the Heartland Greenway Storage site will be performed using best practices and will conform to all requirements of Class VI Rule VI at 40 CFR 146.86(b). The drilling of the injection well in this part of the Illinois Basin is

straightforward with very few known drilling hazards apart from a possible lost circulation zone in the Potosi formation within the intermediate section of the well. The surface casing will be set

Sensitive, Confidential, or Privileged Information [REDACTED] and will be cemented to surface so that any shallow USDW aquifers will be protected. A normal Sensitive, Confidential, or Privileged Information [REDACTED] mud weight will prevent any movement of fluids from one aquifer to another. An intermediate section is planned from the base of the surface casing to the top of the Eau Claire formation which will also cover the St. Peter formation. This section will pass through the Potosi formation, previously recognized as a potential lost circulation zone. If a loss of circulation is encountered, lost circulation materials will be used to regain circulation. If lost circulation materials are not successful, cement plugs will be placed across the zone to enable the well to be drilled to casing point. The intermediate casing will be cemented in two stages with the first stage covering from T.D. at the top of the Eau Claire formation to just above the Potosi formation. The well will be circulated until the first stage cement is set through a stage collar and then the second stage will place cement from the stage collar to surface. The T.D. section will then be drilled through the Eau Claire formation, through the Mt. Simon formation and reaching total depth in basement rocks. The long string casing will then be cemented from T.D. back to surface. While drilling each section of the well the deviation will be checked to ensure that the well stays as close to vertical as possible with the deviation staying below five degrees and no section of the well will have a dog-leg severity greater than Sensitive, Confidential, or Privileged Information [REDACTED]. Should a deviation correction be required directional drilling tools will be employed. There are no known abnormal pressure formation in this area so mud weights Sensitive, Confidential, or Privileged Information [REDACTED] will provide well control. The casing and cements to be used in construction of the NCV-3 well will be compatible with the injected CO₂. A minimum of CR-13 casing will be used across the injection zone and caprock and on the lower section of the intermediate casing. This design has been confirmed with manufacturer testing performed to ASTM and Corrosion Standards. Cement across these sections will be CO₂ resistant as shown by API and ASTM testing.

The targeted injection formation will be tested prior to final completion by step-rate and pressure-falloff testing. These tests will confirm that the proposed injection zone will be able to receive the required volume of CO₂ while injection pressures will stay below fracturing pressure. The injection tubing will be a minimum of CR-13 and will be sized to accommodate the expected injection rate. The size of the wellbore will allow monitoring equipment to be placed in the wellbore so that injection and annular pressure can be monitored. The tubing will also be sized such that surveillance logging can be accommodated. More detail of the well construction methods and materials will be found in the following sections.

4.4. Maximum Wellhead Injection Pressure

A nodal analysis was conducted to determine the injection tubing diameter for the NCV-3 CO₂ injection well. Nodal analysis identifies the operating point where inflow at the top of the well and outflow at the bottom of the well match for different sizes of tubing, allowing a tubing size

to be selected that meets the project needs of approximately one million metric tons per year (2740 metric tons per day) injected per well on average and a maximum rate of 1.34 million metric tons per year (3671 metric tons per day). Schlumberger's PIPESIM software was used to size the injection tubing. [REDACTED]

Sensitive, Confidential, or Privileged Information

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

[REDACTED]

Table 4-3. NCV-3 Parameters Used in the Nodal Analysis Simulation

Nodal Analysis Assumption	Value
Long Casing Size	Sensitive, Confidential, or Privileged Information
Perforation Zone	[REDACTED]
Perforation Specifics	[REDACTED]
Reservoir Temperature	[REDACTED]
Permeability	[REDACTED]
Reservoir pressure gradient	[REDACTED]
Wellhead Pressure	[REDACTED]

Sensitive, Confidential, or Privileged Information



Figure 4-1. Nodal analysis results showing the operating points for the three tubing sizes modelled.

The results of the nodal analysis were used to update the PIPESIM flow model to have a 13 3/8 inch 61 lb/ft intermediate casing set at 4948 ft and a 9 5/8 inch 47 lb/ft long-string casing set at 6431 ft that contains a 5 1/2 inch 17lb/ft with a packer set at 5900 ft. This design is illustrated in **Figure 4-2** below. Using this design injection was modeled and the results for both the maximum rate (**Figure 4-3**) and average rate (**Figure 4-4**) show that 5 1/2 17 lb/ft tubing will meet the project requirements.

Sensitive, Confidential, or Privileged Information




Figure 4-2. Tubing and casing design based on the nodal analysis results.

Sensitive, Confidential, or Privileged Information



Figure 4-3. Pressure versus depth for injection of the maximum injection rate with wellhead pressure set to 1200 psi.

Sensitive, Confidential, or Privileged Information




Figure 4-4. Pressure versus depth for injection of the average injection rate with wellhead pressure set to 1200 psi.

4.5. Casing Program

The NCV-3 injection well design has been developed to accommodate a 5 1/2-inch outer diameter (OD) tubing string, based on the nodal analysis presented in the previous section and was designed to accommodate the concentric casing sizes required to isolate the injection reservoir from USDWs and prevent fluid flow into any unauthorized zones. In accordance with 40 CFR § 146.86, the casing program was designed while considering the following factors:

- 1) Depth to the injection zone;
- 2) Injection pressure, external pressure, internal pressure, and axial loading;
- 3) Hole sizes;
- 4) Size and grade of all casing strings (wall thickness, external diameter, nominal weight, length, joint specification, and construction material);
- 5) Corrosiveness of the CO₂ stream and formation fluids;
- 6) Downhole temperatures;
- 7) Lithology of injection and confining zones;
- 8) Type or grade of cement and cement additives;
- 9) Quantity, chemical composition, and temperature of the CO₂ stream;

In accordance with 40 CFR §146.87, prior to running each casing string, all open-hole logging and testing operations (deviation surveys, open hole logging, formation testing) will be completed. Please see the *Pre-operations Formation Testing section* of this permit for a detailed breakdown of which specific methods and tools will be utilized for the well.

To prevent unintended fluid migration and protect USDW integrity, the surface casing string will extend through shallow USDWs, the intermediate casing string will extend through the lowermost USDW aquifer (St. Peter Sandstone), and the long string casing will extend from the surface through the injection interval with a sufficient number of centralizers. All casing strings will be cemented in place to the surface in one or more stages (see the cementing program below for additional detail).

The metallurgy for each casing string was selected to be compatible with the fluids and stresses encountered within the well and meet or exceed API and ASTM standards. The tubing will be 13CrL80 steel which is 13% chrome and will be corrosion resistant. Sensitive, Confidential, or Privileged Information

Casing loadings were modelled using Schlumberger's Tubing Design and Analysis (TDAS) software. To ensure sufficient structural strength and mechanical integrity throughout the life of the HGSS project, stresses were analyzed and calculated according to worst-case scenarios and tubular specifications were selected accordingly. Minimum design factors are presented in **Table 4-1**. **Table 4-5** through **Table 4-8** below summarize the results of this stress analysis. The burst,

collapse, and tensile strength of each tubular was calculated according to the scenarios defined below and was dependent on fracture gradients, mud weight, depths, and minimum safety factors.

As demonstrated, these safety factors are sufficient in the worst-case scenarios to prevent migration of fluids into or out of USDWs or unauthorized zones. The casing and tubing materials are designed to be compatible with the fluids encountered and the stresses induced throughout the sequestration project. Schlumberger Integrated Drilling Systems design standards were incorporated for the casing design calculations, and Schlumberger Completions group standards were incorporated for the tubing design calculations.

Table 4-4. Minimum Design Factors.

Load	Casing Design Criteria	Tubing Design Criteria
Burst	Sensitive, Confidential, or Privileged Information	
Collapse		
Tension		
Compression		
VME		

The casing installed in any well should be designed to withstand collapse loading based on the following assumption:

1. The hydrostatic head of the drilling fluid in which the casing is run acts on the exterior of the casing at any given depth;
2. Subject to the casing is 1/3 evacuated;
3. The production casing is completely evacuated;
4. The effect of axial stresses on collapse resistance shall be considered; and
5. The effect of temperature deration and casing wear shall be considered.

Any casing/liner that creates an annular space with the production tubing shall be treated as a production casing/liner. The casing installed in any well shall be designed to withstand tensile loading based on the following assumptions:

1. The weight of casing is its weight in air; and
2. The tensile strength of the casing is the yield strength of the casing wall or of the joint, whichever is the lesser.

The following additional assumptions were made during the design process for the Injection wells:

1. A 5% casing wear due to Bottomhole Assembly (BHA) rotation is assumed on all casing design segments with consecutive hole sections;
2. Wall tolerance of 87.5% is assumed as per API standards;

3. Temperature deration is considered on the design of the 13-3/8-inch and 9-5/8- inch casing strings; and
4. The 13-3/8-inch casing is being proposed and engineered to be required to comply with a casing design to pass a 1/3 evacuation loading on collapse.

If the casing recommended is not available, final casing selection would be based on what other technical options are currently available and what might in stock in US-based tubular suppliers' inventory. The minimum criteria for an alternate design would be to exceed standard design criteria.

Table 4-5. Surface Casing Load Scenarios Evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information



Table 4-6. Intermediate Casing Load Scenarios Evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information

Table 4-7. Long-String Casing Load Scenarios evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information	
1	2
3	4
5	6
7	8
9	10
11	12
13	14
15	16
17	18
19	20
21	22
23	24
25	26
27	28
29	30
31	32
33	34
35	36
37	38
39	40
41	42
43	44
45	46
47	48
49	50
51	52
53	54
55	56
57	58
59	60
61	62
63	64
65	66
67	68
69	70
71	72
73	74
75	76
77	78
79	80
81	82
83	84
85	86
87	88
89	90
91	92
93	94
95	96
97	98
99	100
101	102
103	104
105	106
107	108
109	110
111	112
113	114
115	116
117	118
119	120
121	122
123	124
125	126
127	128
129	130
131	132
133	134
135	136
137	138
139	140
141	142
143	144
145	146
147	148
149	150
151	152
153	154
155	156
157	158
159	160
161	162
163	164
165	166
167	168
169	170
171	172
173	174
175	176
177	178
179	180
181	182
183	184
185	186
187	188
189	190
191	192
193	194
195	196
197	198
199	200
201	202
203	204
205	206
207	208
209	210
211	212
213	214
215	216
217	218
219	220
221	222
223	224
225	226
227	228
229	230
231	232
233	234
235	236
237	238
239	240
241	242
243	244
245	246
247	248
249	250
251	252
253	254
255	256
257	258
259	260
261	262
263	264
265	266
267	268
269	270
271	272
273	274
275	276
277	278
279	280
281	282
283	284
285	286
287	288
289	290
291	292
293	294
295	296
297	298
299	300
301	302
303	304
305	306
307	308
309	310
311	312
313	314
315	316
317	318
319	320
321	322
323	324
325	326
327	328
329	330
331	332
333	334
335	336
337	338
339	340
341	342
343	344
345	346
347	348
349	350
351	352
353	354
355	356
357	358
359	360
361	362
363	364
365	366
367	368
369	370
371	372
373	374
375	376
377	378
379	380
381	382
383	384
385	386
387	388
389	390
391	392
393	394
395	396
397	398
399	400
401	402
403	404
405	406
407	408
409	410
411	412
413	414
415	416
417	418
419	420
421	422
423	424
425	426
427	428
429	430
431	432
433	434
435	436
437	438
439	440
441	442
443	444
445	446
447	448
449	450
451	452
453	454
455	456
457	458
459	460
461	462
463	464
465	466
467	468
469	470
471	472
473	474
475	476
477	478
479	480
481	482
483	484
485	486
487	488
489	490
491	492
493	494
495	496
497	498
499	500
501	502
503	504
505	506
507	508
509	510
511	512
513	514
515	516
517	518
519	520
521	522
523	524
525	526
527	528
529	530
531	532
533	534
535	536
537	538
539	540
541	542
543	544
545	546
547	548
549	550
551	552
553	554
555	556
557	558
559	560
561	562
563	564
565	566
567	568
569	570
571	572
573	574
575	576
577	578
579	580
581	582
583	584
585	586
587	588
589	590
591	592
593	594
595	596
597	598
599	600
601	602
603	604
605	606
607	608
609	610
611	612
613	614
615	616
617	618
619	620
621	622
623	624
625	626
627	628
629	630
631	632
633	634
635	636
637	638
639	640
641	642
643	644
645	646
647	648
649	650
651	652
653	654
655	656
657	658
659	660
661	662
663	664
665	666
667	668
669	670
671	672
673	674
675	676
677	678
679	680
681	682
683	684
685	686
687	688
689	690
691	692
693	694
695	696
697	698
699	700
701	702
703	704
705	706
707	708
709	710
711	712
713	714
715	716
717	718
719	720
721	722
723	724
725	726
727	728
729	730
731	732
733	734
735	736
737	738
739	740
741	742
743	744
745	746
747	748
749	750
751	752
753	754
755	756
757	758
759	760
761	762
763	764
765	766
767	768
769	770
771	772
773	774
775	776
777	778
779	780
781	782
783	784
785	786
787	788
789	790
791	792
793	794
795	796
797	798
799	800
801	802
803	804
805	806
807	808
809	810
811	812
813	814
815	816
817	818
819	820
821	822
823	824
825	826
827	828
829	830
831	832
833	834
835	836
837	838
839	840
841	842
843	844
845	846
847	848
849	850
851	852
853	854
855	856
857	858
859	860
861	862
863	864
865	866
867	868
869	870
871	872
873	874
875	876
877	878
879	880
881	882
883	884
885	886
887	888
889	890
891	892
893	894
895	896
897	898
899	900
901	902
903	904
905	906
907	908
909	910
911	912
913	914
915	916
917	918
919	920
921	922
923	924
925	926
927	928
929	930
931	932
933	934
935	936
937	938
939	940
941	942
943	944
945	946
947	948
949	950
951	952
953	954
955	956
957	958
959	960
961	962
963	964
965	966
967	968
969	970
971	972
973	974
975	976
977	978
979	980
981	982
983	984
985	986
987	988
989	990
991	992
993	994
995	996
997	998
999	1000

Table 4-8. Tubing load scenarios evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information



4.5.1. Casing Summary

Sensitive, Confidential, or Privileged Information

Please refer to

Table 4-11. Specifications of the Anticipated CO₂ Stream Composition

Component	Specification	Unit
Minimum CO ₂	98	mole%, dry basis
Water content	< / = 20	lb/MMscf
Impurities (dry basis):		
Total Hydrocarbons	< / = 2	mol%
Inert Gases (N ₂ , Ar, O ₂)	< / = 2	mol%
Hydrogen	< / = 1	mol%
Alcohols, aldehydes, esters	< / = 500	ppmv
Hydrogen Sulfide	< / = 100	ppmv
Total Sulfur	< / = 100	ppmv
Oxygen	< / = 100	ppmv
Carbon monoxide	< / = 100	ppmv
Glycol	< / = 1	ppmv

below for a summary of the properties and placement of casing strings within the casing program. All casing strings will be cemented to the surface in one or more stages in accordance with 40 CFR §146.86. The borehole diameters are considered conventional sizes for the sizes of casing that will be used and should allow ample clearance between the outside of the casing and the borehole wall to ensure that a continuous cement seal can be emplaced along the entire length of the casing string. Each section of the well is discussed in a separate subsection below.

4.5.2. Conductor Casing

The conductor casing consists of [Sensitive, Confidential, or Privileged Information] carbon steel pipe which will provide the stable base required for drilling activities in unconsolidated sediment. Depending on wellsite conditions, the conductor casing will be driven or drilled into shallow soils until striking bedrock

or casing can advance no further below the ground surface. The conductor casing will then be cemented in place.

4.5.3. *Surface Casing*

The surface casing consists of Sensitive, Confidential, or Privileged Information pipe with buttress thread couplings (BTC). The metallurgy of this casing string will be carbon steel and the surface casing string will be cemented to the surface. Prior to running the surface casing downhole, all appropriate logging and testing operations will be completed. The surface string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing* section of this permit for further details.

4.5.4. *Intermediate Casing*

The intermediate casing consists of Sensitive, Confidential, or Privileged Information pipe with BTC couplings. The intermediate string will extend from the ground surface to the top of the confining zone (Eau Claire). The metallurgy of this casing string will be carbon steel and the intermediate casing string will be cemented to the surface to isolate and protect USDW zones. Prior to running the intermediate casing downhole, all appropriate logging and testing operations will be completed. The intermediate string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing* section of this permit for further details.

4.5.5. *Long String Casing*

The long-string casing will be Sensitive, Confidential, or Privileged Information pipe composed of two sections. The uppermost section will extend from the ground surface to 500-feet from the top of the confining unit (Eau Claire) and will be comprised of Sensitive, Confidential, or Privileged Information carbon steel pipe with either long thread coupling (LTC) or BTC connections. Sensitive, Confidential, or Privileged Information



Upon selection of the proprietary seal type, the seal type will be communicated to the Director and HGCS will utilize such seal pending approval from the Director. Prior to running the intermediate casing downhole, all appropriate logging and testing operations will be completed. The long string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent

fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing Section* of this permit for further details.

4.6. Injection Well Tubing and Packer Program

The tubing connects the injection zone to the wellhead, providing a pathway for safely injecting and storing CO₂. In accordance with 40 CFR § 146.86 (c), the tubing and packer material used for construction of the NCV-3 injection well will be compatible with fluids with which the material may be expected to come into contact with and will meet or exceed API and ASTM international standards. HGCS will inject CO₂ through corrosion-resistant tubing with a packer set at a depth opposite a cemented interval a location approved by the Director. While selecting the tubing and packers for the NCV-3 injection, the following factors were taken into consideration:

1. Depth of setting;
2. Characteristics of the CO₂ stream (chemical content, corrosiveness, temperature, and density) and formation fluids;
3. Maximum proposed injection pressure;
4. Maximum proposed annular pressure;
5. Proposed injection rate (intermittent or continuous) and volume and/or mass of the CO₂ stream;
6. Size of tubing and casing; and
7. Tubing tensile strength, burst and collapse pressures.

A summary of these factors is available in **Table 4-10**, **Table 4-11**, and **Table 4-12**. Any change to the tubing and packer specifics detailed in the below will be communicated to the Director.

Sensitive, Confidential, or Privileged Information



The annulus between the tubing and long-string casing will be filled with noncorrosive fluid described in further detail within the annular fluid program in Section 4.8 below.

Table 4-9. HGSS Injection Well Casing Program and Properties of Materials.

Sensitive, Confidential, or Privileged Information

Table 4-10. Required Specifications for Tubing and Packer Selection and Placement (§146.86(c))

Parameter	Attribute	
Characteristics of the CO ₂ Stream	Chemical Content	Please refer to Table 4-11 below.
	Corrosiveness	<i>Stream will contain <50ppm of water and likely not to cause CO₂-driven corrosion</i>
	Temperature	50 °F (At wellhead) 131°F (Injection Zone)
	Density	57.26 lb/ft ³ (at wellhead, under 1400 psi) 49.65 lb/ft ³ (at injection zone, under 3,395 psi)
Characteristics of Formation Fluids (Mount Simon Reservoir)	Temperature	131 °F
	Formation Pressure	2,634 psi
	Fluid Density	68.5 lb/ft ³
	Salinity	160,000 Mg/L
Maximum Proposed Injection Pressure (Downhole)	3,753 psi	
Maximum Proposed Annular Pressure	4,003 psi	
Average Proposed Injection Rate (CO ₂)	2,740 Metric Tons/day	
Volume of CO ₂ Stream	53 MMCF/day	

Table 4-11. Specifications of the Anticipated CO₂ Stream Composition

Component	Specification	Unit
Minimum CO ₂	98	mole%, dry basis
Water content	< / = 20	lb/MMscf
Impurities (dry basis):		
Total Hydrocarbons	< / = 2	mol%
Inert Gases (N ₂ , Ar, O ₂)	< / = 2	mol%
Hydrogen	< / = 1	mol%
Alcohols, aldehydes, esters	< / = 500	ppmv
Hydrogen Sulfide	< / = 100	ppmv
Total Sulfur	< / = 100	ppmv
Oxygen	< / = 100	ppmv
Carbon monoxide	< / = 100	ppmv
Glycol	< / = 1	ppmv

Table 4-12. Tubing and Packer Details.

Item	Setting Depth (Approximate)	Tensile Strength (psi)	Burst Strength (psi)	Collapse Strength (psi)	Material (weight/grade/connection)
Tubing					Sensitive, Confidential, or Privileged Information
<i>Packer</i> (Baker Hughes Model F Permanent Packer)					

*Setting depth interval is dependent on geological conditions observed in the field and is subject to change.

** JFEBEAR™ or similar premium connection

4.7. Injection Well Cementing Program

This section discusses the types and quantities of cement that will be used for each string of casing during construction of the HGSS NCV-3 injection well. In accordance with 40 CFR §146.86, the cement and cement additives were designed to have sufficient quality and quantity to maintain seal integrity throughout the life of the HGSS project and are compatible with the fluids (CO₂ stream and formation fluids) with which the materials may be expected to come into contact and meet or exceed API and ASTM standards. The cementing program has been designed to prevent the movement of fluids out of the sequestration zone into overlying USDWs. The cementing program was designed while considering the following critical factors:

1. Depth to the sequestration zone;
2. Injection pressure, external pressure, internal pressure, and axial loading;
3. Hole sizes;
4. Size and grade of all casing strings (wall thickness, external diameter, nominal weight, length, joint specification, and construction material);
5. Corrosiveness of the CO₂ stream and formation fluids;
6. Downhole temperatures;
7. Lithology of sequestration and confining zones;
8. Type or grade of cement and cement additives; and
9. Quantity, chemical composition, and temperature of the CO₂ stream.


After cementing each casing string to the surface, the integrity and location of cement will be verified using a cement-bond log capable of evaluating the cemental quality radially and

identifying the presence/location of channels to ensure against the likelihood of unintended release of CO₂ from the sequestration zone into the storage complex. Please refer to the pre-operational formation testing plan for further details. Any changes to the cement program will be communicated to the Director prior to well construction operations.

Table 4-13 below features the cement types, cement additives, quantities, and staging depths for each casing string. Each casing string will be cemented to the surface in one or more stages using the balance method. A sufficient number of casing centralizers will be used on all casing strings to centralize the casing in the hole and help ensure that cement completely surrounds the casing along the entire length of pipe. Except for the conductor casing, a guide shoe or float shoe will be run on the bottom of the bottom joint of casing and a float collar will be run on the top of the bottom joint of casing.

Due to the technical challenges involving cementing within geologic formations such as the Potosi Dolomite, the intermediate casing string of each HGSS injection well will be cemented in two stages. To facilitate a two-stage cement job, a multiple-stage cementing tool will be installed approximately 200 ft above the top of the Potosi Formation. After the completion of the first-stage cement job for the intermediate casing string, the multiple-stage cementing tool will be opened and fluid will be circulated down the casing and up the annulus above the cementing tool for a minimum of 8 hours to allow the first-stage cement job to acquire sufficient gel strength.

Sensitive, Confidential, or Privileged Information



Additionally, the excess space (“rathole”) from the top of the Argenta to the well’s terminal depth will be plugged back with EverCRETE to avoid unintended pressure transmission from the injection zone into the basement or near-basement zones. This will be likely be accomplished by setting the float shoe just above the top of the Argenta during long string cementing operations, however other methods may be considered. After an appropriate amount of setting time, cement-bond logs will be run and analyzed for each casing string as detailed in *Pre-operations Formation Testing Plan*.

Table 4-13. Specifications of the HGSS Cementing Program.

Sensitive, Confidential, or Privileged Information

4.8. Injection Well Annular Fluid

The annular space above the packer between the 9 5/8-inch long-string casing and the 5 1/2-inch injection tubing will be filled with a non-corrosive fluid to provide a positive pressure differential to stabilize the injection tubing and inhibit corrosion. The annular fluid will be a dilute salt solution such as potassium chloride (KCl), sodium chloride (NaCl), calcium chloride (CaCl₂), or similar solution. The fluid will be mixed onsite from dry salt and good quality (clean) freshwater, or it will be acquired pre-mixed. The fluid will also be filtered to ensure that solids do not interfere with the packer or other components of the annular protection system. The final choice of the type of fluid will depend on availability.

The annulus fluid will contain additives and inhibitors including a corrosion inhibitor, biocide (to prevent growth of harmful bacteria), and an oxygen scavenger. Example additives and inhibitors are listed below along with approximate mix rates:

Sensitive, Confidential, or Privileged Information



These products recommendations were provided by Tetra Technologies, Inc., of Houston, Texas. Actual products may vary from those described above.

4.9. Injection Wellhead and Valve Program

This section details the specifications of the injection wellheads and valves to be used for the NCV-3 injection well. All wellheads, valves, piping and surface facilities have been designed to meet or exceed API and ASTM international standards for the maximum anticipated injection pressure and will be maintained in a safe and leak-free condition. HGCS will equip all ports on the wellhead assembly above the casing bowl of injection wells with valves, blind flanges, or similar equipment. HGCS will also equip the injection well with valves to provide isolation of wells from the pipeline system and allow entry into the wells.

The HGSS NCV-3 injection wellhead will consist of the following components, from bottom to top:

Sensitive, Confidential, or Privileged Information



Sensitive, Confidential, or Privileged Information

The wellhead and Christmas tree will be composed of materials that are designed to be compatible with the injection fluid upon which the material may be expected to come into contact with. All components that encounter the CO₂ injection fluid will be made of a corrosion-resistant alloy such as stainless steel. Because the CO₂ injection fluid will be very dry, use of stainless-steel components for the flow-wetted components is a conservative measure to minimize corrosion and increase the life expectancy of this equipment. Materials that will not have contact with the injection fluid, such as the surface casing and shallow portion of the long string, will be manufactured of carbon steel. A preliminary materials specification for the wellhead and Christmas tree assembly is described in **Table 4-14** using material classes as defined in American Petroleum Institute (API) Specification 6A (Specification for Wellhead and Christmas Tree Equipment). A summary of material class definitions is provided in **Table 4-15**. The final wellhead and Christmas tree materials specification may vary slightly from the information given below because neither has been selected yet. A generalized illustration of the wellhead and Christmas tree is provided in **Figure 4-5**. If any changes are made to the wellhead and valve program, HGSC will communicate these changes to the Director and will finalize program specifics upon approval from the Director.

Table 4-14. Materials Specification of Wellhead and Christmas Tree.

Component	Material Class ^(a)
Casing Head Housing (for 20-in. surface casing)	Sensitive, Confidential, or Privileged Information
Casing Head Spool (for 13-3/8-in. intermediate casing)	
Tubing Spool Assembly (for 9-5/8-in. long-string casing)	
Christmas Tree	

(a) When multiple classes are given, the highest class applies. Cameron uses this convention because not all components are available in all class types.

Table 4-15. Material Classes from API 6A (Spec. for Wellhead and Christmas Tree Equipment).

API Material Class	Body, Bonnet, End & Outlet Connections	Pressure Controlling Parts, Stems, & Mandrel Hangers
AA – General Service	Sensitive, Confidential, or Privileged Information	
BB – General Service		
CC – General Service		
DD – Sour Service ^(a)		
EE – Sour Service ^(a)		
FF – Sour Service ^(a)		
HH – Sour Service ^(a)		
<p>Source: Cameron Surface Systems, Houston, Texas</p> <p>(a) As defined by National Association of Corrosion Engineers (NACE) Standard MR075.</p> <p>(b) In compliance with NACE Standard MR0175.</p>		

Sensitive, Confidential, or Privileged Information




Figure 4-5. A design schematic of the HGSS injection wellhead and Christmas tree used for the NCV-3 CO₂ injection well.

4.10. Injection Well Routine Maintenance

HGCS will perform routine well maintenance on all injection wells. Routine maintenance will consist of wellhead valve maintenance and a review of recorded casing annular pressure measurements. If a significant deviation is noted (such that the mechanical integrity of the well is comprised or may become compromised), the appropriate remediation plan will be triggered. Please see the *Injection Well Operational Plan* and the *Emergency and Remedial Response Plan* sections for additional details.

4.11. Injection Well Perforation Program

The long-string casing will be perforated across the Mount Simon Sandstone with deep-penetrating shaped charges. The exact perforation interval will be determined after the well is drilled and characterized with geophysical logging/formation testing techniques.

Sensitive, Confidential, or Privileged Information

4.12. Summary of Monitoring Technologies Deployed in Injection Wells

To meet monitoring and operational requirements of 40 CFR §146.90 and §146.88, several technologies will be deployed within-and-around the NCV-3 injection well to monitor critical parameters needed to ensure sustained integrity of the HGSS storage complex and protection of overlying USDWs. **Table 4-16** below details the suite of monitoring technologies that will be deployed directly within or around injection wellbore and surface injection wellhead/tree assemblies. Please refer to the testing and monitoring section of this permit for a more detailed breakdown of the HGSS monitoring network, monitoring technologies and monitoring strategies.

Table 4-16. *Technologies Deployed in NCV-3 Injection Well for Monitoring Purposes

Device(s)	Location	Purpose	Monitoring category
Wellhead Pressure-Temperature Gauge	<small>Sensitive, Confidential, or Privileged Information</small>	Wellhead Injection Pressure and temperature	CO ₂ Injection Process Monitoring
Downhole Pressure - Temperature Gauge		Reservoir & Bottom-Hole Pressure/Temperature	
Continuous Annular Pressure Gauge		Annular Pressure Monitoring	
Downhole Pressure-Temperature Gauge		Annular Pressure Monitoring	


Device(s)	Location	Purpose	Monitoring category
Distributed Temperature Sensing (DTS)	Sensitive, Confidential, or Privileged Information	Distributed Temperature Monitoring (Reservoir, Upper Mt. Simon, Eau Claire, Argenta, Precambrian Basement)	CO ₂ Injection Process Monitoring & In-direct Plume Monitoring
Daniel Sr Orifice Mass Flow Meter		Injection Rate and Volume	CO ₂ Injection Process Monitoring
Distributed Acoustic Sensing Fiber Optics (DAS)		3D/4D VSP & Microseismic	In-direct Plume Monitoring & Seismicity Monitoring
Boreal Laser Gas Detection System		Leak Detection	Surface or Near Surface Monitoring

*Note this list of technology does not encompass all monitoring technologies deployed within the HGSS monitoring network; please refer to the testing and monitoring section for a detailed breakdown of the HGSS monitoring network and strategy.

4.13. Schematic of the Subsurface Construction Details of the HGSS Injection Wells

A generalized schematic of the HGSS NCV-3 injection well is shown in **Figure 4-6**. As discussed in the previous sections, the injection well will include the following casing strings:

Sensitive, Confidential, or Privileged Information

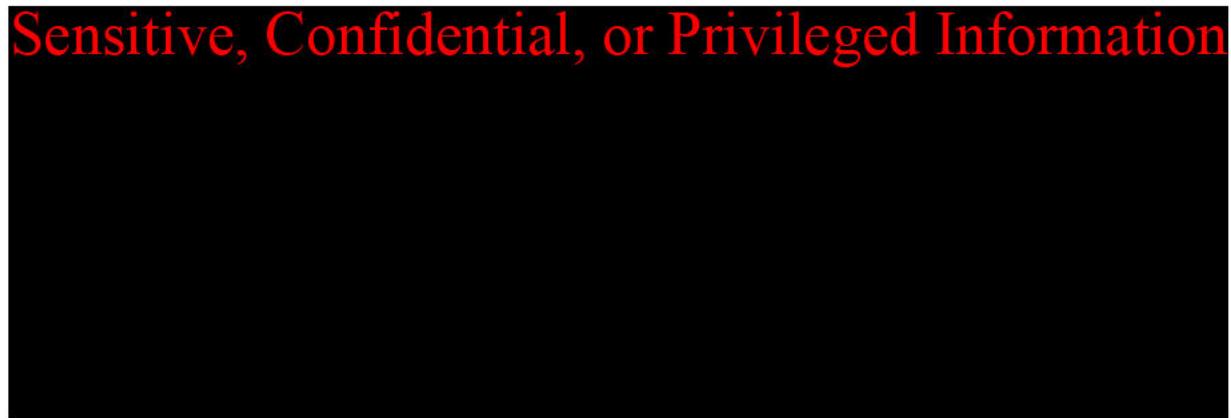

All depths are preliminary and will be adjusted based on additional characterization data obtained while drilling the CO₂ injection wells. The conductor, surface, intermediate, and long casing strings will be cemented to surface in accordance with 40 CFR §146.86. The purpose of the conductor string is to provide a stable borehole across the near-surface, unconsolidated glacial deposits before drilling the remaining deeper casing strings and to help protect the USDWs. Groundwater in the vicinity of the site is normally obtained from sand and gravel deposits that are contained within the unconsolidated Quaternary-aged material above bedrock. According to the Illinois Geological Survey ILWATER map, unconsolidated sand, and gravel

deposits within the vicinity of the proposed site can range in depth from about 0 to 500 ft bgs and bedrock can range in depth from 400-600 feet bgs. The surface string will extend across the uppermost bedrock layers (Pennsylvanian age) and will help to further isolate and protect the USDWs. The intermediate casing string will extend across and isolate deeper potentially unstable layers or layers where there is potential for lost circulation to ensure that the well can be drilled to total depth, in addition to isolating and protecting the deeper USDWs (St. Peter Sandstone). [REDACTED]

Sensitive, Confidential, or Privileged Information

[REDACTED]

[REDACTED]

Sensitive, Confidential, or Privileged Information

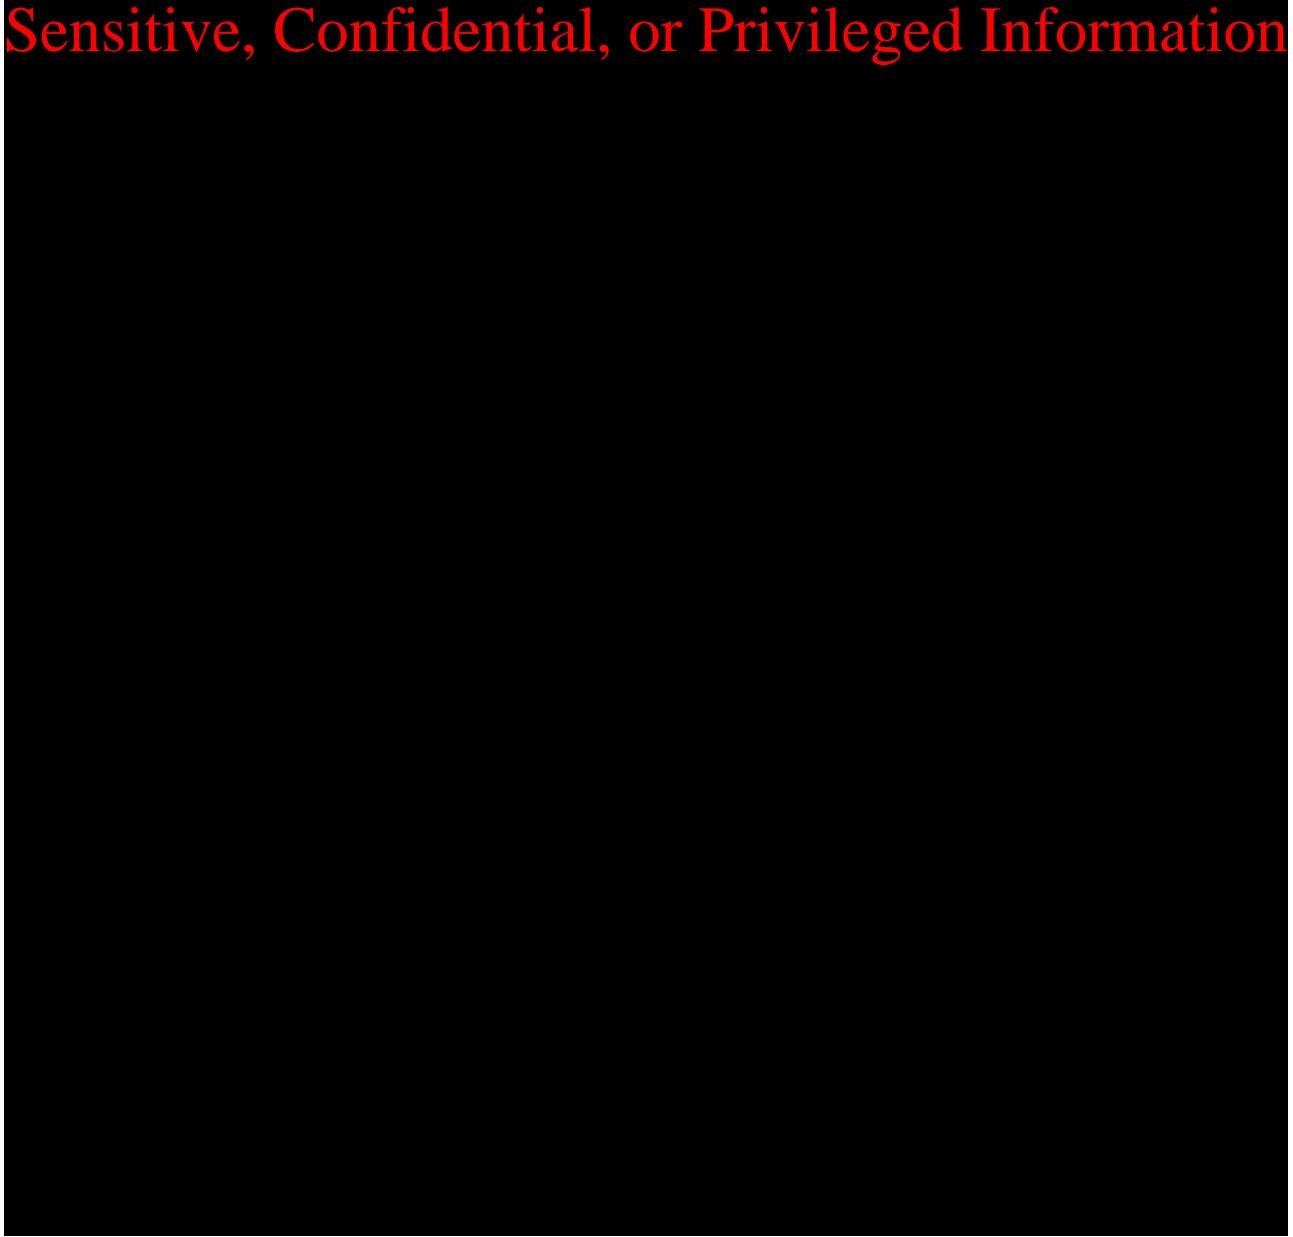


Figure 4-6. Design schematic of HGSS NCV-3 CO₂ injection well.

TABLE OF CONTENTS

4	INJECTION WELL CONSTRUCTION PLAN	3
4.1.	Injection Well Construction Overview	3
4.2.	Proposed Stimulation Program [40 CFR § 146.82(a)(9)]	4
4.3.	Construction Procedures [40 CFR §146.82(a)(12)]	4
4.4.	Maximum Wellhead Injection Pressure	6
4.5.	Casing Program	10
4.6.	Injection Well Tubing and Packer Program	19
4.7.	Injection Well Cementing Program	22
4.8.	Injection Well Annular Fluid	25
4.9.	Injection Wellhead and Valve Program	25
4.10.	Injection Well Routine Maintenance	29
4.11.	Injection Well Perforation Program	29
4.12.	Summary of Monitoring Technologies Deployed in Injection Wells	29
4.13.	Schematic of the Subsurface Construction Details of the HGSS Injection Wells.....	30

LIST OF FIGURES

Figure 4-1. Nodal analysis results showing the operating points for the three tubing sizes modelled.....	7
Figure 4-2. Tubing and casing design based on the nodal analysis results.....	8
Figure 4-3. Pressure versus depth for injection of the maximum injection rate with wellhead pressure set to 1200 psi.....	9
Figure 4-4. Pressure versus depth for injection of the average injection rate with wellhead pressure set to 1200 psi.....	9
Figure 4-5. A design schematic of the HGSS injection wellhead and Christmas tree used for the NCV-4 CO ₂ injection well.....	29
Figure 4-6. Design schematic of HGSS NCV-4 CO ₂ injection well	32

LIST OF TABLES

Table 4-1. Summary Table of Well Information for NCV-4.....	3
Table 4-2. Summary Table of Generalized Completion Depth Intervals for NCV-4.....	4
Table 4-3. NCV-4 Parameters Used in the Nodal Analysis Simulation.....	6
Table 4-4. Minimum Design Factors	11

Table 4-5. Surface Casing Load Scenarios Evaluated showing the design factors for each scenario.....	13
Table 4-6. Intermediate Casing Load Scenarios Evaluated showing the design factors for each scenario.....	14
Table 4-7. Long-String Casing Load Scenarios evaluated showing the design factors for each scenario.....	15
Table 4-8. Tubing load scenarios evaluated showing the design factors for each scenario.	16
Table 4-9. HGSS Injection Well Casing Program and Properties of Materials.....	20
Table 4-10. Required Specifications for Tubing and Packer Selection and Placement (§146.86(c))	21
Table 4-11. Specifications of the Anticipated CO ₂ Stream Composition.....	21
Table 4-12. Tubing and Packer Details.....	22
Table 4-13. Specifications of the HGSS Cementing Program.....	24
Table 4-14. Materials Specification of Wellhead and Christmas Tree.....	27
Table 4-15. Material Classes from API 6A (Spec. for Wellhead and Christmas Tree Equipment).	27
Table 4-16. *Technologies Deployed in NCV-4 Injection Well for Monitoring Purposes.....	29

4 INJECTION WELL CONSTRUCTION PLAN
40 CFR 146.82(a) (9), (11), (12)

Heartland Greenway Storage Site NCV-4 Injection Well

Facility Information

Facility name: Heartland Greenway Storage Site (HGSS)
NCV-4
Facility Operator: Heartland Greenway Carbon Storage, LLC (HGCS)
Facility Contact: David Giles, President and COO
2626 Cole Ave., Dallas, Texas, USA 75204
Phone: (210) 880-6000; Email: dgiles@navco2.com
Project Location: Taylorville, Christian County, Illinois
39.669522 / -89.269798

4.1. Injection Well Construction Overview

Heartland Greenway Carbon Storage LLC. (HGCS) seeks to drill and construct a new Class VI CO₂ Injection well, NCV-4, within the Heartland Greenway Storage Site (HGSS) to support CO₂ storage operations and has designed this well construction plan in accordance with 40 CFR §146.86, pursuant to 40 CFR §146.82. HGCS has implemented well design strategies and materials focused on (1) preventing movement of fluids into or between USDWS or into any authorized zones; (2) permitting the use of appropriate testing devices and workover tools and; (3) permit continuous monitoring of the annulus space between the tubing and long string casing. Any necessary changes to this well plan due to logistical or geological conditions encountered within the field will be communicated to the Director prior to well construction. A summary of the spatial location, coordinates and well API/UWI values for NCV-4 are shown below in **Table 4-1**, and general well construction details are detailed below in **Table 4-2**.

Table 4-1. Summary Table of Well Information for NCV-4.

Well Name	Location (LAT/LONG) ±300 ft	API	Operator	Completion Footages	Total Depth
NCV-4	39.669522 / -89.269798	TBD	<i>Heartland Greenway Carbon Storage, LLC</i>	5935-6242	6483

Table 4-2. Summary Table of Generalized Completion Depth Intervals for NCV-4

Casing	T.O.C-Shoe Depth (ft. MD.)	Open Hole Diameter (inches)	Comment
30" Conductor	Sensitive, Confidential, or Privileged Information		Driven or drilled into shallow soils until refusal
20" Surface			Ran through shallow USDWs
13 3/8" Intermediate			Ran through deepest USDW to top of Eau Claire Caprock
9 5/8" Long String			Ran to well terminal depth (Precambrian)

4.2. Proposed Stimulation Program [40 CFR § 146.82(a)(9)]

While not anticipated based on existing interpolations of reservoir quality, a well stimulation program (such as an acid wash) may be proposed by HGCS based on geologic conditions and data identified during drilling and well testing/logging operations. If well stimulation is determined to be required to meet injection goals of the NCV-4 well, HGCS will complete the required stimulation plan [attached to this permit] and communicate the details of the well stimulation program to the Director. HGCS will not proceed with well stimulation operations until approval is received.

4.3. Construction Procedures [40 CFR §146.82(a)(12)]

The NCV-4 injection well has been designed to accommodate the mass of CO₂ that will be delivered to it, while considering critical characteristics of the CO₂ storage reservoir which affect the well design. Well design principals and materials detailed in subsequent sections were selected and vetted to ensure construction materials have sufficient structural strength to provide sustained mechanical integrity throughout the life of the CCS project in addition to permitting the use of appropriate testing devices, workover tools and continuous monitoring of the annulus space between the injection tubing and long string casing. All well construction materials were selected to be compatible with fluids of which they may be expected to come into contact (e.g., corrosion-resistant cement) and meet or exceed API and ASTM International standards. This plan illustrates the comprehensive analysis performed to comply with and exceed the standards detailed in 40 CFR §146.86 and other related sections (§146.87, 146.88, 146.89, 146.90, 146.94 (a), 146.91), in pursuant to 40 CFR § 146.82 regarding the design of the injection well casing, cement, and wellhead and their relation to subsequent testing, monitoring, and reporting activities.

The construction of the NCV-4 injection well within the Heartland Greenway Storage site will be performed using best practices and will conform to all requirements of Class VI Rule VI at 40 CFR 146.86(b). The drilling of the injection well in this part of the Illinois Basin is straightforward with very few known drilling hazards apart from a possible lost circulation zone in the Potosi formation within the intermediate section of the well. The surface casing will be set [REDACTED] and will be cemented to surface so that any shallow USDW aquifers will be protected. A normal [REDACTED] mud weight will prevent any movement of fluids from one aquifer to another. An intermediate section is planned from the base of the surface casing to the top of the Eau Claire formation which will also cover the St. Peter formation. This section will pass through the Potosi formation, previously recognized as a potential lost circulation zone. If a loss of circulation is encountered, lost circulation materials will be used to regain circulation. If lost circulation materials are not successful, cement plugs will be placed across the zone to enable the well to be drilled to casing point. The intermediate casing will be cemented in two stages with the first stage covering from T.D. at the top of the Eau Claire formation to just above the Potosi formation. The well will be circulated until the first stage cement is set through a stage collar and then the second stage will place cement from the stage collar to surface. The T.D. section will then be drilled through the Eau Claire formation, through the Mt. Simon formation and reaching total depth in basement rocks. The long string casing will then be cemented from T.D. back to surface. While drilling each section of the well the deviation will be checked to ensure that the well stays as close to vertical as possible with the deviation staying below five degrees and no section of the well will have a dog-leg severity greater than [REDACTED]. Should a deviation correction be required directional drilling tools will be employed. There are no known abnormal pressure formation in this area so mud weights [REDACTED] will provide well control. The casing and cements to be used in construction of the NCV-4 well will be compatible with the injected CO₂. A minimum of CR-13 casing will be used across the injection zone and caprock and on the lower section of the intermediate casing. This design has been confirmed with manufacturer testing performed to ASTM and Corrosion Standards. Cement across these sections will be CO₂ resistant as shown by API and ASTM testing.

The targeted injection formation will be tested prior to final completion by step-rate and pressure-falloff testing. These tests will confirm that the proposed injection zone will be able to receive the required volume of CO₂ while injection pressures will stay below fracturing pressure. The injection tubing will be a minimum of CR-13 and will be sized to accommodate the expected injection rate. The size of the wellbore will allow monitoring equipment to be placed in the wellbore so that injection and annular pressure can be monitored. The tubing will also be sized such that surveillance logging can be accommodated. More detail of the well construction methods and materials will be found in the following sections.

4.4. Maximum Wellhead Injection Pressure

A nodal analysis was conducted to determine the injection tubing diameter for the NCV-4 CO₂ injection well. Nodal analysis identifies the operating point where inflow at the top of the well and outflow at the bottom of the well match for different sizes of tubing, allowing a tubing size to be selected that meets the project needs of approximately one million metric tons per year (2740 metric tons per day) injected per well on average and a maximum rate of 1.34 million metric tons per year (3671 metric tons per day). Schlumberger's PIPESIM software was used to size the injection tubing.

Sensitive, Confidential, or Privileged Information



Table 4-3. NCV-4 Parameters Used in the Nodal Analysis Simulation

Nodal Analysis Assumption	Value
Long Casing Size	Sensitive, Confidential, or Privileged Information
Perforation Zone	
Perforation Specifics	
Reservoir Temperature	
Permeability	
Reservoir pressure gradient	
Wellhead Pressure	

Sensitive, Confidential, or Privileged Information




Figure 4-1. Nodal analysis results showing the operating points for the three tubing sizes modelled.

The results of the nodal analysis were used to update the PIPESIM flow model to have a 13 3/8 inch 61 lb/ft intermediate casing set at 4948 ft and a 9 5/8 inch 47 lb/ft long-string casing set at 6431 ft that contains a 5 1/2 inch 17lb/ft with a packer set at 5900 ft. This design is illustrated in **Figure 4-2** below. Using this design injection was modeled and the results for both the maximum rate (**Figure 4-3**) and average rate (**Figure 4-4**) show that 5 1/2 17 lb/ft tubing will meet the project requirements.

Sensitive, Confidential, or Privileged Information




Figure 4-2. Tubing and casing design based on the nodal analysis results.

Sensitive, Confidential, or Privileged Information




Figure 4-3. Pressure versus depth for injection of the maximum injection rate with wellhead pressure set to 1200 psi.

Sensitive, Confidential, or Privileged Information




Figure 4-4. Pressure versus depth for injection of the average injection rate with wellhead pressure set to 1200 psi.

4.5. Casing Program

The NCV-4 injection well design has been developed to accommodate a 5 1/2-inch outer diameter (OD) tubing string, based on the nodal analysis presented in the previous section and was designed to accommodate the concentric casing sizes required to isolate the injection reservoir from USDWs and prevent fluid flow into any unauthorized zones. In accordance with 40 CFR § 146.86, the casing program was designed while considering the following factors:

- 1) Depth to the injection zone;
- 2) Injection pressure, external pressure, internal pressure, and axial loading;
- 3) Hole sizes;
- 4) Size and grade of all casing strings (wall thickness, external diameter, nominal weight, length, joint specification, and construction material);
- 5) Corrosiveness of the CO₂ stream and formation fluids;
- 6) Downhole temperatures;
- 7) Lithology of injection and confining zones;
- 8) Type or grade of cement and cement additives;
- 9) Quantity, chemical composition, and temperature of the CO₂ stream;

In accordance with 40 CFR §146.87, prior to running each casing string, all open-hole logging and testing operations (deviation surveys, open hole logging, formation testing) will be completed. Please see the *Pre-operations Formation Testing section* of this permit for a detailed breakdown of which specific methods and tools will be utilized for the well.

To prevent unintended fluid migration and protect USDW integrity, the surface casing string will extend through shallow USDWs, the intermediate casing string will extend through the lowermost USDW aquifer (St. Peter Sandstone), and the long string casing will extend from the surface through the injection interval with a sufficient number of centralizers. All casing strings will be cemented in place to the surface in one or more stages (see the cementing program below for additional detail).

The metallurgy for each casing string was selected to be compatible with the fluids and stresses encountered within the well and meet or exceed API and ASTM standards. Sensitive, Confidential, or Privileged Information



Casing loadings were modelled using Schlumberger's Tubing Design and Analysis (TDAS) software. To ensure sufficient structural strength and mechanical integrity throughout the life of the HGSS project, stresses were analyzed and calculated according to worst-case scenarios and tubular specifications were selected accordingly. Minimum design factors are presented in **Table**

4-4. Table 4-5 through Table 4-8 below summarize the results of this stress analysis. The burst, collapse, and tensile strength of each tubular was calculated according to the scenarios defined below and was dependent on fracture gradients, mud weight, depths, and minimum safety factors.

As demonstrated, these safety factors are sufficient in the worst-case scenarios to prevent migration of fluids into or out of USDWs or unauthorized zones. The casing and tubing materials are designed to be compatible with the fluids encountered and the stresses induced throughout the sequestration project. Schlumberger Integrated Drilling Systems design standards were incorporated for the casing design calculations, and Schlumberger Completions group standards were incorporated for the tubing design calculations.

Table 4-4. Minimum Design Factors.

Load	Casing Design Criteria	Tubing Design Criteria
Burst	Sensitive, Confidential, or Privileged Information	
Collapse		
Tension		
Compression		
VME		

The casing installed in any well should be designed to withstand collapse loading based on the following assumption:

1. The hydrostatic head of the drilling fluid in which the casing is run acts on the exterior of the casing at any given depth;
2. Subject to the casing is 1/3 evacuated;
3. The production casing is completely evacuated;
4. The effect of axial stresses on collapse resistance shall be considered; and
5. The effect of temperature deration and casing wear shall be considered.

Any casing/liner that creates an annular space with the production tubing shall be treated as a production casing/liner. The casing installed in any well shall be designed to withstand tensile loading based on the following assumptions:

1. The weight of casing is its weight in air; and
2. The tensile strength of the casing is the yield strength of the casing wall or of the joint, whichever is the lesser.

The following additional assumptions were made during the design process for the Injection wells:

1. A 5% casing wear due to Bottomhole Assembly (BHA) rotation is assumed on all casing design segments with consecutive hole sections;

2. Wall tolerance of 87.5% is assumed as per API standards;
3. Temperature deration is considered on the design of the 13-3/8-inch and 9-5/8- inch casing strings; and
4. The 13-3/8-inch casing is being proposed and engineered to be required to comply with a casing design to pass a 1/3 evacuation loading on collapse.

If the casing recommended is not available, final casing selection would be based on what other technical options are currently available and what might in stock in US-based tubular suppliers' inventory. The minimum criteria for an alternate design would be to exceed standard design criteria.

Table 4-5. Surface Casing Load Scenarios Evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information	
1	2
3	4
5	6
7	8
9	10
11	12
13	14
15	16
17	18
19	20
21	22
23	24
25	26
27	28
29	30
31	32
33	34
35	36
37	38
39	40
41	42
43	44
45	46
47	48
49	50
51	52
53	54
55	56
57	58
59	60
61	62
63	64
65	66
67	68
69	70
71	72
73	74
75	76
77	78
79	80
81	82
83	84
85	86
87	88
89	90
91	92
93	94
95	96
97	98
99	100
101	102
103	104
105	106
107	108
109	110
111	112
113	114
115	116
117	118
119	120
121	122
123	124
125	126
127	128
129	130
131	132
133	134
135	136
137	138
139	140
141	142
143	144
145	146
147	148
149	150
151	152
153	154
155	156
157	158
159	160
161	162
163	164
165	166
167	168
169	170
171	172
173	174
175	176
177	178
179	180
181	182
183	184
185	186
187	188
189	190
191	192
193	194
195	196
197	198
199	200
201	202
203	204
205	206
207	208
209	210
211	212
213	214
215	216
217	218
219	220
221	222
223	224
225	226
227	228
229	230
231	232
233	234
235	236
237	238
239	240
241	242
243	244
245	246
247	248
249	250
251	252
253	254
255	256
257	258
259	260
261	262
263	264
265	266
267	268
269	270
271	272
273	274
275	276
277	278
279	280
281	282
283	284
285	286
287	288
289	290
291	292
293	294
295	296
297	298
299	300
301	302
303	304
305	306
307	308
309	310
311	312
313	314
315	316
317	318
319	320
321	322
323	324
325	326
327	328
329	330
331	332
333	334
335	336
337	338
339	340
341	342
343	344
345	346
347	348
349	350
351	352
353	354
355	356
357	358
359	360
361	362
363	364
365	366
367	368
369	370
371	372
373	374
375	376
377	378
379	380
381	382
383	384
385	386
387	388
389	390
391	392
393	394
395	396
397	398
399	400
401	402
403	404
405	406
407	408
409	410
411	412
413	414
415	416
417	418
419	420
421	422
423	424
425	426
427	428
429	430
431	432
433	434
435	436
437	438
439	440
441	442
443	444
445	446
447	448
449	450
451	452
453	454
455	456
457	458
459	460
461	462
463	464
465	466
467	468
469	470
471	472
473	474
475	476
477	478
479	480
481	482
483	484
485	486
487	488
489	490
491	492
493	494
495	496
497	498
499	500
501	502
503	504
505	506
507	508
509	510
511	512
513	514
515	516
517	518
519	520
521	522
523	524
525	526
527	528
529	530
531	532
533	534
535	536
537	538
539	540
541	542
543	544
545	546
547	548
549	550
551	552
553	554
555	556
557	558
559	560
561	562
563	564
565	566
567	568
569	570
571	572
573	574
575	576
577	578
579	580
581	582
583	584
585	586
587	588
589	590
591	592
593	594
595	596
597	598
599	600
601	602
603	604
605	606
607	608
609	610
611	612
613	614
615	616
617	618
619	620
621	622
623	624
625	626
627	628
629	630
631	632
633	634
635	636
637	638
639	640
641	642
643	644
645	646
647	648
649	650
651	652
653	654
655	656
657	658
659	660
661	662
663	664
665	666
667	668
669	670
671	672
673	674
675	676
677	678
679	680
681	682
683	684
685	686
687	688
689	690
691	692
693	694
695	696
697	698
699	700
701	702
703	704
705	706
707	708
709	710
711	712
713	714
715	716
717	718
719	720
721	722
723	724
725	726
727	728
729	730
731	732
733	734
735	736
737	738
739	740
741	742
743	744
745	746
747	748
749	750
751	752
753	754
755	756
757	758
759	760
761	762
763	764
765	766
767	768
769	770
771	772
773	774
775	776
777	778
779	780
781	782
783	784
785	786
787	788
789	790
791	792
793	794
795	796
797	798
799	800
801	802
803	804
805	806
807	808
809	810
811	812
813	814
815	816
817	818
819	820
821	822
823	824
825	826
827	828
829	830
831	832
833	834
835	836
837	838
839	840
841	842
843	844
845	846
847	848
849	850
851	852
853	854
855	856
857	858
859	860
861	862
863	864
865	866
867	868
869	870
871	872
873	874
875	876
877	878
879	880
881	882
883	884
885	886
887	888
889	890
891	892
893	894
895	896
897	898
899	900
901	902
903	904
905	906
907	908
909	910
911	912
913	914
915	916
917	918
919	920
921	922
923	924
925	926
927	928
929	930
931	932
933	934
935	936
937	938
939	940
941	942
943	944
945	946
947	948
949	950
951	952
953	954
955	956
957	958
959	960
961	962
963	964
965	966
967	968
969	970
971	972
973	974
975	976
977	978
979	980
981	982
983	984
985	986
987	988
989	990
991	992
993	994
995	996
997	998
999	1000

Table 4-6. Intermediate Casing Load Scenarios Evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information

Table 4-7. Long-String Casing Load Scenarios evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information

Table 4-8. Tubing load scenarios evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information

4.5.1.1. Casing Summary

Sensitive, Confidential, or Privileged Information

Please refer to

Table 4-11. Specifications of the Anticipated CO₂ Stream Composition

Component	Specification	Unit
Minimum CO ₂	98	mole%, dry basis
Water content	< / = 20	lb/MMscf
Impurities (dry basis):		
Total Hydrocarbons	< / = 2	mol%
Inert Gases (N ₂ , Ar, O ₂)	< / = 2	mol%
Hydrogen	< / = 1	mol%
Alcohols, aldehydes, esters	< / = 500	ppmv
Hydrogen Sulfide	< / = 100	ppmv
Total Sulfur	< / = 100	ppmv
Oxygen	< / = 100	ppmv
Carbon monoxide	< / = 100	ppmv
Glycol	< / = 1	ppmv

below for a summary of the properties and placement of casing strings within the casing program. All casing strings will be cemented to the surface in one or more stages in accordance with 40 CFR §146.86. The borehole diameters are considered conventional sizes for the sizes of casing that will be used and should allow ample clearance between the outside of the casing and the borehole wall to ensure that a continuous cement seal can be emplaced along the entire length of the casing string. Each section of the well is discussed in a separate subsection below.

4.5.1.2. Conductor Casing

The conductor casing consists of [Redacted] carbon steel pipe which will provide the stable base required for drilling activities in unconsolidated sediment. Depending on wellsite conditions, the conductor casing will be driven or drilled into shallow soils until striking bedrock

or casing can advance no further below the ground surface. The conductor casing will then be cemented in place.

4.5.1.3. Surface Casing

The surface casing consists of Sensitive, Confidential, or Privileged Information pipe with buttress thread couplings (BTC). The metallurgy of this casing string will be carbon steel and the surface casing string will be cemented to the surface. Prior to running the surface casing downhole, all appropriate logging and testing operations will be completed. The surface string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing* section of this permit for further details.

4.5.1.4. Intermediate Casing

The intermediate casing consists of Sensitive, Confidential, or Privileged Information pipe with BTC couplings. The intermediate string will extend from the ground surface to the top of the confining zone (Eau Claire). The metallurgy of this casing string will be carbon steel and the intermediate casing string will be cemented to the surface to isolate and protect USDW zones. Prior to running the intermediate casing downhole, all appropriate logging and testing operations will be completed. The intermediate string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing* section of this permit for further details.

4.5.1.5. Long String Casing

The long-string casing will be Sensitive, Confidential, or Privileged Information pipe composed of two sections. The uppermost section will extend from the ground surface to 500-feet from the top of the confining unit (Eau Claire) and will be comprised of Sensitive, Confidential, or Privileged Information carbon steel pipe with either long thread coupling (LTC) or BTC connections. The lower long string section will extend from 500' above the confining zone to the wells terminal depth (Precambrian). Sensitive, Confidential, or Privileged Information

Upon selection of the proprietary seal type, the seal type will be communicated to the Director and HGCS will utilize such seal pending approval from the Director. Prior to running the intermediate casing downhole, all appropriate logging and testing operations will be completed. The long string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent

fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing Section* of this permit for further details.

4.6. Injection Well Tubing and Packer Program

The tubing connects the injection zone to the wellhead, providing a pathway for safely injecting and storing CO₂. In accordance with 40 CFR § 146.86 (c), the tubing and packer material used for construction of the NCV-4 injection well will be compatible with fluids with which the material may be expected to come into contact with and will meet or exceed API and ASTM international standards. HGCS will inject CO₂ through corrosion-resistant tubing with a packer set at a depth opposite a cemented interval a location approved by the Director. While selecting the tubing and packers for the NCV-4 injection, the following factors were taken into consideration:

1. Depth of setting;
2. Characteristics of the CO₂ stream (chemical content, corrosiveness, temperature, and density) and formation fluids;
3. Maximum proposed injection pressure;
4. Maximum proposed annular pressure;
5. Proposed injection rate (intermittent or continuous) and volume and/or mass of the CO₂ stream;
6. Size of tubing and casing; and
7. Tubing tensile strength, burst and collapse pressures.

A summary of these factors is available in **Table 4-10, Table 4-11, and Table 4-12**. Any change to the tubing and packer specifics detailed in the below will be communicated to the Director.

Sensitive, Confidential, or Privileged Information

A series of seven horizontal black bars of varying lengths, with the first bar containing the red text "Sensitive, Confidential, or Privileged Information".

The annulus between the tubing and long-string casing will be filled with noncorrosive fluid described in further detail within the annular fluid program in Section 4.8 below.

Table 4-9. HGSS Injection Well Casing Program and Properties of Materials.

Sensitive, Confidential, or Privileged Information

Table 4-10. Required Specifications for Tubing and Packer Selection and Placement (§146.86(c))

Parameter	Attribute	
Characteristics of the CO ₂ Stream	Chemical Content	Please refer to Table 4-11 below.
	Corrosiveness	<i>Stream will contain <50ppm of water and likely not to cause CO₂-driven corrosion</i>
	Temperature	50 °F (At wellhead) 131°F (Injection Zone)
	Density	57.26 lb/ft ³ (at wellhead, under 1400 psi) 49.65 lb/ft ³ (at injection zone, under 3,395 psi)
Characteristics of Formation Fluids (Mount Simon Reservoir)	Temperature	131 °F
	Formation Pressure	2,634 psi
	Fluid Density	68.5 lb/ft ³
	Salinity	160,000 Mg/L
Maximum Proposed Injection Pressure (Downhole)	3,734 psi	
Maximum Proposed Annular Pressure	3,984 psi	
Average Proposed Injection Rate (CO ₂)	2,740 Metric Tons/day	
Volume of CO ₂ Stream	53 MMCF/day	

Table 4-11. Specifications of the Anticipated CO₂ Stream Composition

Component	Specification	Unit
Minimum CO ₂	98	mole%, dry basis
Water content	< / = 20	lb/MMscf
Impurities (dry basis):		
Total Hydrocarbons	< / = 2	mol%
Inert Gases (N ₂ , Ar, O ₂)	< / = 2	mol%
Hydrogen	< / = 1	mol%
Alcohols, aldehydes, esters	< / = 500	ppmv
Hydrogen Sulfide	< / = 100	ppmv
Total Sulfur	< / = 100	ppmv
Oxygen	< / = 100	ppmv
Carbon monoxide	< / = 100	ppmv
Glycol	< / = 1	ppmv

Table 4-12. Tubing and Packer Details.

Item	Setting Depth (Approximate)	Tensile Strength (psi)	Burst Strength (psi)	Collapse Strength (psi)	Material (weight/grade/connection)
Tubing	Sensitive, Confidential, or Privileged Information				
<i>Packer</i> (Baker Hughes Model F Permanent Packer)	Sensitive, Confidential, or Privileged Information				

***Setting depth interval is dependent on geological conditions observed in the field and is subject to change.**

** JFEBEAR™ or similar premium connection

4.7. Injection Well Cementing Program

This section discusses the types and quantities of cement that will be used for each string of casing during construction of the HGSS NCV-4 injection well. In accordance with 40 CFR §146.86, the cement and cement additives were designed to have sufficient quality and quantity to maintain seal integrity throughout the life of the HGSS project and are compatible with the fluids (CO₂ stream and formation fluids) with which the materials may be expected to come into contact and meet or exceed API and ASTM standards. The cementing program has been designed to prevent the movement of fluids out of the sequestration zone into overlying USDWs. The cementing program was designed while considering the following critical factors:


1. Depth to the sequestration zone;
2. Injection pressure, external pressure, internal pressure, and axial loading;
3. Hole sizes;
4. Size and grade of all casing strings (wall thickness, external diameter, nominal weight, length, joint specification, and construction material);
5. Corrosiveness of the CO₂ stream and formation fluids;
6. Downhole temperatures;
7. Lithology of sequestration and confining zones;
8. Type or grade of cement and cement additives; and
9. Quantity, chemical composition, and temperature of the CO₂ stream.

After cementing each casing string to the surface, the integrity and location of cement will be verified using a cement-bond log capable of evaluating the cemental quality radially and identifying the presence/location of channels to ensure against the likelihood of unintended release of CO₂ from the sequestration zone into the storage complex. Please refer to the pre-operational formation testing plan for further details. Any changes to the cement program will be communicated to the Director prior to well construction operations.

Table 4-13 below features the cement types, cement additives, quantities, and staging depths for each casing string. Each casing string will be cemented to the surface in one or more stages using the balance method. A sufficient number of casing centralizers will be used on all casing strings to centralize the casing in the hole and help ensure that cement completely surrounds the casing along the entire length of pipe. Except for the conductor casing, a guide shoe or float shoe will be run on the bottom of the bottom joint of casing and a float collar will be run on the top of the bottom joint of casing.

Due to the technical challenges involving cementing within geologic formations such as the Potosi Dolomite, the intermediate casing string of each HGSS injection well will be cemented in two stages. To facilitate a two-stage cement job, a multiple-stage cementing tool will be installed approximately 200 ft above the top of the Potosi Formation. After the completion of the first-stage cement job for the intermediate casing string, the multiple-stage cementing tool will be opened and fluid will be circulated down the casing and up the annulus above the cementing tool for a minimum of 8 hours to allow the first-stage cement job to acquire sufficient gel strength.

Sensitive, Confidential, or Privileged Information



Additionally, the excess space (“rathole”) from the top of the Argenta to the well’s terminal depth will be plugged back with EverCRETE to avoid unintended pressure transmission from the injection zone into the basement or near-basement zones. This will be likely be accomplished by setting the float shoe just above the top of the Argenta during long string cementing operations, however other methods may be considered. After an appropriate amount of setting time, cement-bond logs will be run and analyzed for each casing string as detailed in *Pre-operations Formation Testing Plan*.

Table 4-13. Specifications of the HGSS Cementing Program.


Sensitive, Confidential, or Privileged Information

4.8. Injection Well Annular Fluid

The annular space above the packer between the 9 5/8-inch long-string casing and the 5 1/2-inch injection tubing will be filled with a non-corrosive fluid to provide a positive pressure differential to stabilize the injection tubing and inhibit corrosion. The annular fluid will be a dilute salt solution such as potassium chloride (KCl), sodium chloride (NaCl), calcium chloride (CaCl₂), or similar solution. The fluid will be mixed onsite from dry salt and good quality (clean) freshwater, or it will be acquired pre-mixed. The fluid will also be filtered to ensure that solids do not interfere with the packer or other components of the annular protection system. The final choice of the type of fluid will depend on availability.

The annulus fluid will contain additives and inhibitors including a corrosion inhibitor, biocide (to prevent growth of harmful bacteria), and an oxygen scavenger. Example additives and inhibitors are listed below along with approximate mix rates:

Sensitive, Confidential, or Privileged Information



These products recommendations were provided by Tetra Technologies, Inc., of Houston, Texas. Actual products may vary from those described above.

4.9. Injection Wellhead and Valve Program

This section details the specifications of the injection wellheads and valves to be used for the NCV-4 injection well. All wellheads, valves, piping and surface facilities have been designed to meet or exceed API and ASTM international standards for the maximum anticipated injection pressure and will be maintained in a safe and leak-free condition. HGCS will equip all ports on the wellhead assembly above the casing bowl of injection wells with valves, blind flanges, or similar equipment. HGCS will also equip the injection well with valves to provide isolation of wells from the pipeline system and allow entry into the wells.

The HGSS NCV-4 injection wellhead will consist of the following components, from bottom to top:

Sensitive, Confidential, or Privileged Information



Sensitive, Confidential, or Privileged Information

The wellhead and Christmas tree will be composed of materials that are designed to be compatible with the injection fluid upon which the material may be expected to come into contact with. All components that encounter the CO₂ injection fluid will be made of a corrosion-resistant alloy such as stainless steel. Because the CO₂ injection fluid will be very dry, use of stainless-steel components for the flow-wetted components is a conservative measure to minimize corrosion and increase the life expectancy of this equipment. Materials that will not have contact with the injection fluid, such as the surface casing and shallow portion of the long string, will be manufactured of carbon steel. A preliminary materials specification for the wellhead and Christmas tree assembly is described in **Table 4-14** using material classes as defined in American Petroleum Institute (API) Specification 6A (Specification for Wellhead and Christmas Tree Equipment). A summary of material class definitions is provided in **Table 4-15**. The final wellhead and Christmas tree materials specification may vary slightly from the information given below because neither has been selected yet. A generalized illustration of the wellhead and Christmas tree is provided in **Figure 4-5**. If any changes are made to the wellhead and valve program, HGSC will communicate these changes to the Director and will finalize program specifics upon approval from the Director.

Table 4-14. Materials Specification of Wellhead and Christmas Tree.

Component	Material Class ^(a)
Casing Head Housing (for 20-in. surface casing)	Sensitive, Confidential, or Privileged Information
Casing Head Spool (for 13-3/8-in. intermediate casing)	
Tubing Spool Assembly (for 9-5/8-in. long-string casing)	
Christmas Tree	

(a) When multiple classes are given, the highest class applies. Cameron uses this convention because not all components are available in all class types.

Table 4-15. Material Classes from API 6A (Spec. for Wellhead and Christmas Tree Equipment).

API Material Class	Body, Bonnet, End & Outlet Connections	Pressure Controlling Parts, Stems, & Mandrel Hangers
AA – General Service	Sensitive, Confidential, or Privileged Information	
BB – General Service		
CC – General Service		
DD – Sour Service ^(a)		
EE – Sour Service ^(a)		
FF – Sour Service ^(a)		
HH – Sour Service ^(a)		

Source: Cameron Surface Systems, Houston, Texas

(a) As defined by National Association of Corrosion Engineers (NACE) Standard MR075.

(b) In compliance with NACE Standard MR0175.

Sensitive, Confidential, or Privileged Information




Figure 4-5. A design schematic of the HGSS injection wellhead and Christmas tree used for the NCV-4 CO₂ injection well.

4.10. Injection Well Routine Maintenance

HGCS will perform routine well maintenance on all injection wells. Routine maintenance will consist of wellhead valve maintenance and a review of recorded casing annular pressure measurements. If a significant deviation is noted (such that the mechanical integrity of the well is comprised or may become compromised), the appropriate remediation plan will be triggered. Please see the *Injection Well Operational Plan* and the *Emergency and Remedial Response Plan* sections for additional details.

4.11. Injection Well Perforation Program

The long-string casing will be perforated across the Mount Simon Sandstone with deep-penetrating shaped charges. The exact perforation interval will be determined after the well is drilled and characterized with geophysical logging/formation testing techniques. Sensitive, Confidential, or Privileged Information



4.12. Summary of Monitoring Technologies Deployed in Injection Wells

To meet monitoring and operational requirements of 40 CFR §146.90 and §146.88, several technologies will be deployed within-and-around the NCV-4 injection well to monitor critical parameters needed to ensure sustained integrity of the HGSS storage complex and protection of overlying USDWs. **Table 4-16** below details the suite of monitoring technologies that will be deployed directly within or around injection wellbore and surface injection wellhead/tree assemblies. Please refer to the testing and monitoring section of this permit for a more detailed breakdown of the HGSS monitoring network, monitoring technologies and monitoring strategies.

Table 4-16. *Technologies Deployed in NCV-4 Injection Well for Monitoring Purposes

Device(s)	Location	Purpose	Monitoring category
Wellhead Pressure-Temperature Gauge	<small>Sensitive, Confidential, or Privileged Information</small>	Wellhead Injection Pressure and temperature	CO ₂ Injection Process Monitoring
Downhole Pressure - Temperature Gauge		Reservoir & Bottom-Hole Pressure/Temperature	
Continuous Annular Pressure Gauge		Annular Pressure Monitoring	


Device(s)	Location	Purpose	Monitoring category
Downhole Pressure-Temperature Gauge	Sensitive, Confidential, or Privileged Information	Annular Pressure Monitoring	
Distributed Temperature Sensing (DTS)		Distributed Temperature Monitoring (Reservoir, Upper Mt. Simon, Eau Claire, Argenta, Precambrian Basement)	CO ₂ Injection Process Monitoring & In-direct Plume Monitoring
Daniel Sr Orifice Mass Flow Meter		Injection Rate and Volume	CO ₂ Injection Process Monitoring
Distributed Acoustic Sensing Fiber Optics (DAS)		3D/4D VSP & Microseismic	In-direct Plume Monitoring & Seismicity Monitoring
Boreal Laser Gas Detection System		Leak Detection	Surface or Near Surface Monitoring

*Note this list of technology does not encompass all monitoring technologies deployed within the HGSS monitoring network; please refer to the testing and monitoring section for a detailed breakdown of the HGSS monitoring network and strategy.

4.13. Schematic of the Subsurface Construction Details of the HGSS Injection Wells

A generalized schematic of the HGSS NCV-4 injection well is shown in **Figure 4-6**. As discussed in the previous sections, the injection well will include the following casing strings:

Sensitive, Confidential, or Privileged Information

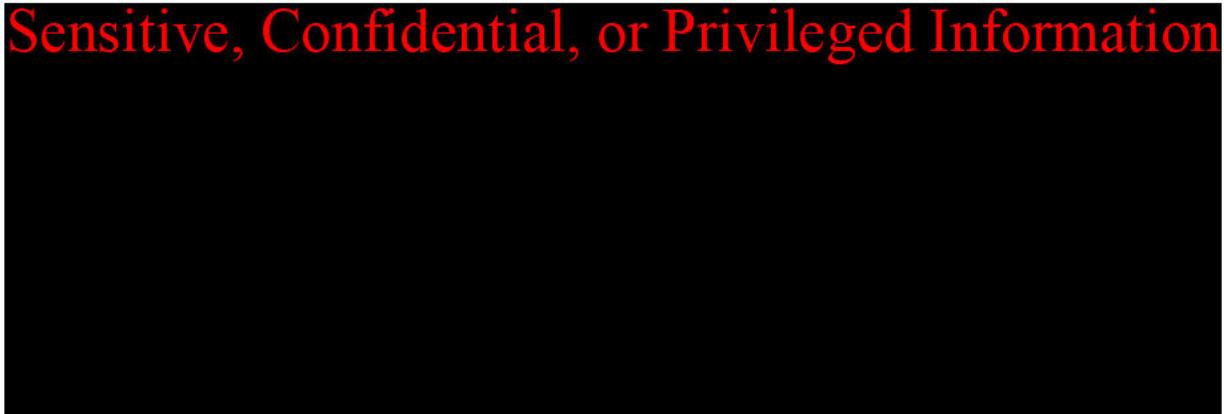

All depths are preliminary and will be adjusted based on additional characterization data obtained while drilling the CO₂ injection wells. The conductor, surface, intermediate, and long casing strings will be cemented to surface in accordance with 40 CFR § 146.86. The purpose of the conductor string is to provide a stable borehole across the near-surface, unconsolidated glacial deposits before drilling the remaining deeper casing strings and to help protect the

USDWs. Groundwater in the vicinity of the site is normally obtained from sand and gravel deposits that are contained within the unconsolidated Quaternary-aged material above bedrock. According to the Illinois Geological Survey ILWATER map, unconsolidated sand, and gravel deposits within the vicinity of the proposed site can range in depth from about 0 to 500 ft bgs and bedrock can range in depth from 400-600 feet bgs. The surface string will extend across the uppermost bedrock layers (Pennsylvanian age) and will help to further isolate and protect the USDWs. The intermediate casing string will extend across and isolate deeper potentially unstable layers or layers where there is potential for lost circulation to ensure that the well can be drilled to total depth, in addition to isolating and protecting the deeper USDWs (St. Peter Sandstone).

Sensitive, Confidential, or Privileged Information



Sensitive, Confidential, or Privileged Information

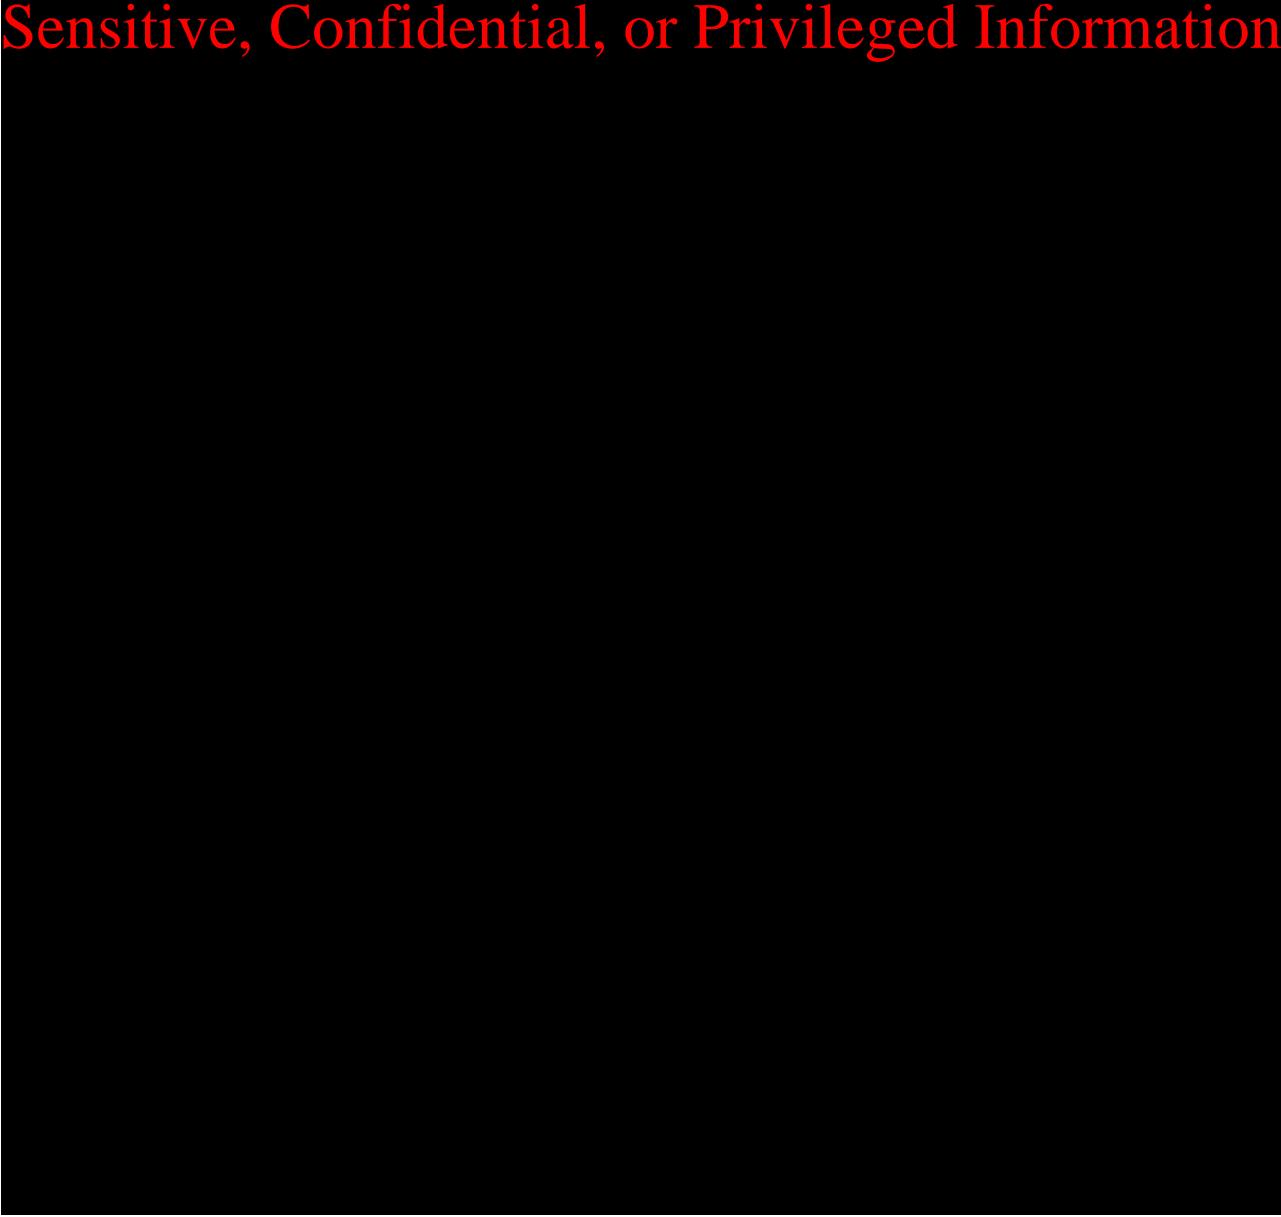


Figure 4-6. Design schematic of HGSS NCV-4 CO₂ injection well.

Table of Contents

5	INJECTION WELL CONSTRUCTION PLAN	3
4.1.	Injection Well Construction Overview	3
4.2.	Proposed Stimulation Program [40 CFR § 146.82(a)(9)]	4
4.3.	Construction Procedures [40 CFR § 146.82(a)(12)]	4
4.4.	Maximum Wellhead Injection Pressure	6
4.5.	Casing Program	10
4.6.	Injection Well Tubing and Packer Program	19
4.7.	Injection Well Cementing Program	22
4.8.	Injection Well Annular Fluid	25
4.9.	Injection Wellhead and Valve Program	25
4.10.	Injection Well Routine Maintenance	29
4.11.	Injection Well Perforation Program	29
4.12.	Summary of Monitoring Technologies Deployed in Injection Wells	29
4.13.	Schematic of the Subsurface Construction Details of the HGSS Injection Wells.....	30

LIST OF FIGURES

Figure 4-1.	Nodal analysis results showing the operating points for the three tubing sizes modelled.....	7
Figure 4-2.	Tubing and casing design based on the nodal analysis results.....	8
Figure 4-3.	Pressure versus depth for injection of the maximum injection rate with wellhead pressure set to 1200 psi.....	9
Figure 4-4.	Pressure versus depth for injection of the average injection rate with wellhead pressure set to 1200 psi.....	9
Figure 4-5.	A design schematic of the HGSS injection wellhead and Christmas tree used for the NCV-5 CO ₂ injection well.....	29
Figure 4-6.	Design schematic of HGSS NCV-5 CO ₂ injection well	32

LIST OF TABLES

Table 4-1.	Summary Table of Well Information for NCV-5.....	3
Table 4-2.	Summary Table of Generalized Completion Depth Intervals for NCV-5.....	4
Table 4-3.	NCV-5 Parameters Used in the Nodal Analysis Simulation	6
Table 4-4.	Minimum Design Factors	11

Table 4-5. Surface Casing Load Scenarios Evaluated showing the design factors for each scenario.....	13
Table 4-6. Intermediate Casing Load Scenarios Evaluated showing the design factors for each scenario.....	14
Table 4-7. Long-String Casing Load Scenarios evaluated showing the design factors for each scenario.....	15
Table 4-8. Tubing load scenarios evaluated showing the design factors for each scenario.	16
Table 4-9. HGSS Injection Well Casing Program and Properties of Materials.....	20
Table 4-10. Required Specifications for Tubing and Packer Selection and Placement (§146.86(c))	21
Table 4-11. Specifications of the Anticipated CO ₂ Stream Composition.....	21
Table 4-12. Tubing and Packer Details.....	22
Table 4-13. Specifications of the HGSS Cementing Program.....	24
Table 4-14. Materials Specification of Wellhead and Christmas Tree.....	27
Table 4-15. Material Classes from API 6A (Spec. for Wellhead and Christmas Tree Equipment).	27
Table 4-16. *Technologies Deployed in NCV-5 Injection Well for Monitoring Purposes.....	29

4 INJECTION WELL CONSTRUCTION PLAN
40 CFR 146.82(a) (9), (11), (12)

Heartland Greenway Storage Site NCV-5 Injection Well

Facility Information

Facility name: Heartland Greenway Storage Site (HGSS)
NCV-5
Facility Operator: Heartland Greenway Carbon Storage, LLC (HGCS)
Facility Contact: David Giles, President and COO
2626 Cole Ave., Dallas, Texas, USA 75204
Phone: (210) 880-6000; Email: dgiles@navco2.com
Project Location: Taylorville, Christian County, Illinois
39.691445 / -89.269736

4.1. Injection Well Construction Overview

Heartland Greenway Carbon Storage LLC. (HGCS) seeks to drill and construct a new Class VI CO₂ Injection well, NCV-5, within the Heartland Greenway Storage Site (HGSS) to support CO₂ storage operations and has designed this well construction plan in accordance with 40 CFR §146.86, pursuant to 40 CFR §146.82. HGCS has implemented well design strategies and materials focused on (1) preventing movement of fluids into or between USDWS or into any authorized zones; (2) permitting the use of appropriate testing devices and workover tools and; (3) permit continuous monitoring of the annulus space between the tubing and long string casing. Any necessary changes to this well plan due to logistical or geological conditions encountered within the field will be communicated to the Director prior to well construction. A summary of the spatial location, coordinates and well API/UWI values for NCV-5 are shown below in **Table 4-1**, and general well construction details are detailed below in **Table 4-2**

Table 4-1. Summary Table of Well Information for NCV-5.

Well Name	Location (LAT/LONG) ±300 ft	API	Operator	Completion Footages	Total Depth
NCV-5	39.691445 / -89.269736	TBD	<i>Heartland Greenway Carbon Storage, LLC</i>	5902-6211	6454

Table 4-2. Summary Table of Generalized Completion Depth Intervals for NCV-5

Casing	T.O.C-Shoe Depth (ft. MD.)	Open Hole Diameter (inches)	Comment
30" Conductor	Sensitive, Confidential, or Privileged Information		Driven or drilled into shallow soils until refusal
20" Surface			Ran through shallow USDWs
13 3/8" Intermediate			Ran through deepest USDW to top of Eau Claire Caprock
9 5/8" Long String			Ran to well terminal depth (Precambrian)

4.2. Proposed Stimulation Program [40 CFR § 146.82(a)(9)]

While not anticipated based on existing interpolations of reservoir quality, a well stimulation program (such as an acid wash) may be proposed by HGCS based on geologic conditions and data identified during drilling and well testing/logging operations. If well stimulation is determined to be required to meet injection goals of the NCV-5 well, HGCS will complete the required stimulation plan [attached to this permit] and communicate the details of the well stimulation program to the Director. HGCS will not proceed with well stimulation operations until approval is received.

4.3. Construction Procedures [40 CFR § 146.82(a)(12)]

The NCV-5 injection well has been designed to accommodate the mass of CO₂ that will be delivered to it, while considering critical characteristics of the CO₂ storage reservoir which affect the well design. Well design principals and materials detailed in subsequent sections were selected and vetted to ensure construction materials have sufficient structural strength to provide sustained mechanical integrity throughout the life of the CCS project in addition to permitting the use of appropriate testing devices, workover tools and continuous monitoring of the annulus space between the injection tubing and long string casing. All well construction materials were selected to be compatible with fluids of which they may be expected to come into contact (e.g., corrosion-resistant cement) and meet or exceed API and ASTM International standards. This plan illustrates the comprehensive analysis performed to comply with and exceed the standards detailed in 40 CFR §146.86 and other related sections (§146.87, 146.88, 146.89, 146.90, 146.94 (a), 146.91), in pursuant to 40 CFR § 146.82 regarding the design of the injection well casing, cement, and wellhead and their relation to subsequent testing, monitoring, and reporting activities.

The construction of the NCV-5 injection well within the Heartland Greenway Storage site will be performed using best practices and will conform to all requirements of Class VI Rule VI at 40 CFR 146.86(b). The drilling of the injection well in this part of the Illinois Basin is straightforward with very few known drilling hazards apart from a possible lost circulation zone in the Potosi formation within the intermediate section of the well. The surface casing will be set [REDACTED] and will be cemented to surface so that any shallow USDW aquifers will be protected. A normal [REDACTED] mud weight will prevent any movement of fluids from one aquifer to another. An intermediate section is planned from the base of the surface casing to the top of the Eau Claire formation which will also cover the St. Peter formation. This section will pass through the Potosi formation, previously recognized as a potential lost circulation zone. If a loss of circulation is encountered, lost circulation materials will be used to regain circulation. If lost circulation materials are not successful, cement plugs will be placed across the zone to enable the well to be drilled to casing point. The intermediate casing will be cemented in two stages with the first stage covering from T.D. at the top of the Eau Claire formation to just above the Potosi formation. The well will be circulated until the first stage cement is set through a stage collar and then the second stage will place cement from the stage collar to surface. The T.D. section will then be drilled through the Eau Claire formation, through the Mt. Simon formation and reaching total depth in basement rocks. The long string casing will then be cemented from T.D. back to surface. While drilling each section of the well the deviation will be checked to ensure that the well stays as close to vertical as possible with the deviation staying below five degrees and no section of the well will have a dog-leg severity greater than [REDACTED]. Should a deviation correction be required directional drilling tools will be employed. There are no known abnormal pressure formation in this area so mud weights [REDACTED] will provide well control. The casing and cements to be used in construction of the NCV-5 well will be compatible with the injected CO₂. A minimum of CR-13 casing will be used across the injection zone and caprock and on the lower section of the intermediate casing. This design has been confirmed with manufacturer testing performed to ASTM and Corrosion Standards. Cement across these sections will be CO₂ resistant as shown by API and ASTM testing.

The targeted injection formation will be tested prior to final completion by step-rate and pressure fall-off testing. These tests will confirm that the proposed injection zone will be able to receive the required volume of CO₂ while injection pressures will stay below fracturing pressure. The injection tubing will be a minimum of CR-13 and will be sized to accommodate the expected injection rate. The size of the wellbore will allow monitoring equipment to be placed in the wellbore so that injection and annular pressure can be monitored. The tubing will also be sized such that surveillance logging can be accommodated. More detail of the well construction methods and materials will be found in the following sections.

4.4. Maximum Wellhead Injection Pressure

A nodal analysis was conducted to determine the injection tubing diameter for the NCV-5 CO₂ injection well. Nodal analysis identifies the operating point where inflow at the top of the well and outflow at the bottom of the well match for different sizes of tubing, allowing a tubing size to be selected that meets the project needs of approximately one million metric tons per year (2740 metric tons per day) injected per well on average and a maximum rate of 1.34 million metric tons per year (3671 metric tons per day). Schlumberger's PIPESIM software was used to size the injection tubing.

Sensitive, Confidential, or Privileged Information



Table 4-3. NCV-5 Parameters Used in the Nodal Analysis Simulation

Nodal Analysis Assumption	Value
Long Casing Size	Sensitive, Confidential, or Privileged Information
Perforation Zone	
Perforation Specifics	
Reservoir Temperature	
Permeability	
Reservoir pressure gradient	
Wellhead Pressure	

Sensitive, Confidential, or Privileged Information




Figure 4-1. Nodal analysis results showing the operating points for the three tubing sizes modelled.

The results of the nodal analysis were used to update the PIPESIM flow model to have a 13 3/8 inch 61 lb/ft intermediate casing set at 4948 ft and a 9 5/8 inch 47 lb/ft long-string casing set at 6431 ft that contains a 5 1/2 inch 17lb/ft with a packer set at 5900 ft. This design is illustrated in **Figure 4-2** below. Using this design injection was modeled and the results for both the maximum rate (**Figure 4-3**) and average rate (**Figure 4-4**) show that 5 1/2 17 lb/ft tubing will meet the project requirements.

Sensitive, Confidential, or Privileged Information




Figure 4-2. Tubing and casing design based on the nodal analysis results.

Sensitive, Confidential, or Privileged Information




Figure 4-3. Pressure versus depth for injection of the maximum injection rate with wellhead pressure set to 1200 psi.

Sensitive, Confidential, or Privileged Information




Figure 4-4. Pressure versus depth for injection of the average injection rate with wellhead pressure set to 1200 psi.

4.5. Casing Program

The NCV-5 injection well design has been developed to accommodate a 5 1/2-inch outer diameter (OD) tubing string, based on the nodal analysis presented in the previous section and was designed to accommodate the concentric casing sizes required to isolate the injection reservoir from USDWs and prevent fluid flow into any unauthorized zones. In accordance with 40 CFR § 146.86, the casing program was designed while considering the following factors:

- 1) Depth to the injection zone;
- 2) Injection pressure, external pressure, internal pressure, and axial loading;
- 3) Hole sizes;
- 4) Size and grade of all casing strings (wall thickness, external diameter, nominal weight, length, joint specification, and construction material);
- 5) Corrosiveness of the CO₂ stream and formation fluids;
- 6) Downhole temperatures;
- 7) Lithology of injection and confining zones;
- 8) Type or grade of cement and cement additives;
- 9) Quantity, chemical composition, and temperature of the CO₂ stream;

In accordance with 40 CFR §146.87, prior to running each casing string, all open-hole logging and testing operations (deviation surveys, open hole logging, formation testing) will be completed. Please see the *Pre-operations Formation Testing section* of this permit for a detailed breakdown of which specific methods and tools will be utilized for the well.

To prevent unintended fluid migration and protect USDW integrity, the surface casing string will extend through shallow USDWs, the intermediate casing string will extend through the lowermost USDW aquifer (St. Peter Sandstone), and the long string casing will extend from the surface through the injection interval with a sufficient number of centralizers. All casing strings will be cemented in place to the surface in one or more stages (see the cementing program below for additional detail).

The metallurgy for each casing string was selected to be compatible with the fluids and stresses encountered within the well and meet or exceed API and ASTM standards. Sensitive, Confidential, or Privileged Information



Casing loadings were modelled using Schlumberger's Tubing Design and Analysis (TDAS) software. To ensure sufficient structural strength and mechanical integrity throughout the life of the HGSS project, stresses were analyzed and calculated according to worst-case scenarios and tubular specifications were selected accordingly. Minimum design factors are presented in **Table**

4-4. Table 4-5 through Table 4-8 below summarize the results of this stress analysis. The burst, collapse, and tensile strength of each tubular was calculated according to the scenarios defined below and was dependent on fracture gradients, mud weight, depths, and minimum safety factors.

As demonstrated, these safety factors are sufficient in the worst-case scenarios to prevent migration of fluids into or out of USDWs or unauthorized zones. The casing and tubing materials are designed to be compatible with the fluids encountered and the stresses induced throughout the sequestration project. Schlumberger Integrated Drilling Systems design standards were incorporated for the casing design calculations, and Schlumberger Completions group standards were incorporated for the tubing design calculations.

Table 4-4. Minimum Design Factors.

Load	Casing Design Criteria	Tubing Design Criteria
Burst	Sensitive, Confidential, or Privileged Information	
Collapse		
Tension		
Compression		
VME		

The casing installed in any well should be designed to withstand collapse loading based on the following assumption:

1. The hydrostatic head of the drilling fluid in which the casing is run acts on the exterior of the casing at any given depth;
2. Subject to the casing is 1/3 evacuated;
3. The production casing is completely evacuated;
4. The effect of axial stresses on collapse resistance shall be considered; and
5. The effect of temperature deration and casing wear shall be considered.

Any casing/liner that creates an annular space with the production tubing shall be treated as a production casing/liner. The casing installed in any well shall be designed to withstand tensile loading based on the following assumptions:

1. The weight of casing is its weight in air; and
2. The tensile strength of the casing is the yield strength of the casing wall or of the joint, whichever is the lesser.

The following additional assumptions were made during the design process for the Injection wells:

1. A 5% casing wear due to Bottomhole Assembly (BHA) rotation is assumed on all casing design segments with consecutive hole sections;

2. Wall tolerance of 87.5% is assumed as per API standards;
3. Temperature deration is considered on the design of the 13-3/8-inch and 9-5/8- inch casing strings; and
4. The 13-3/8-inch casing is being proposed and engineered to be required to comply with a casing design to pass a 1/3 evacuation loading on collapse.

If the casing recommended is not available, final casing selection would be based on what other technical options are currently available and what might in stock in US-based tubular suppliers' inventory. The minimum criteria for an alternate design would be to exceed standard design criteria.

Table 4-5. Surface Casing Load Scenarios Evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information

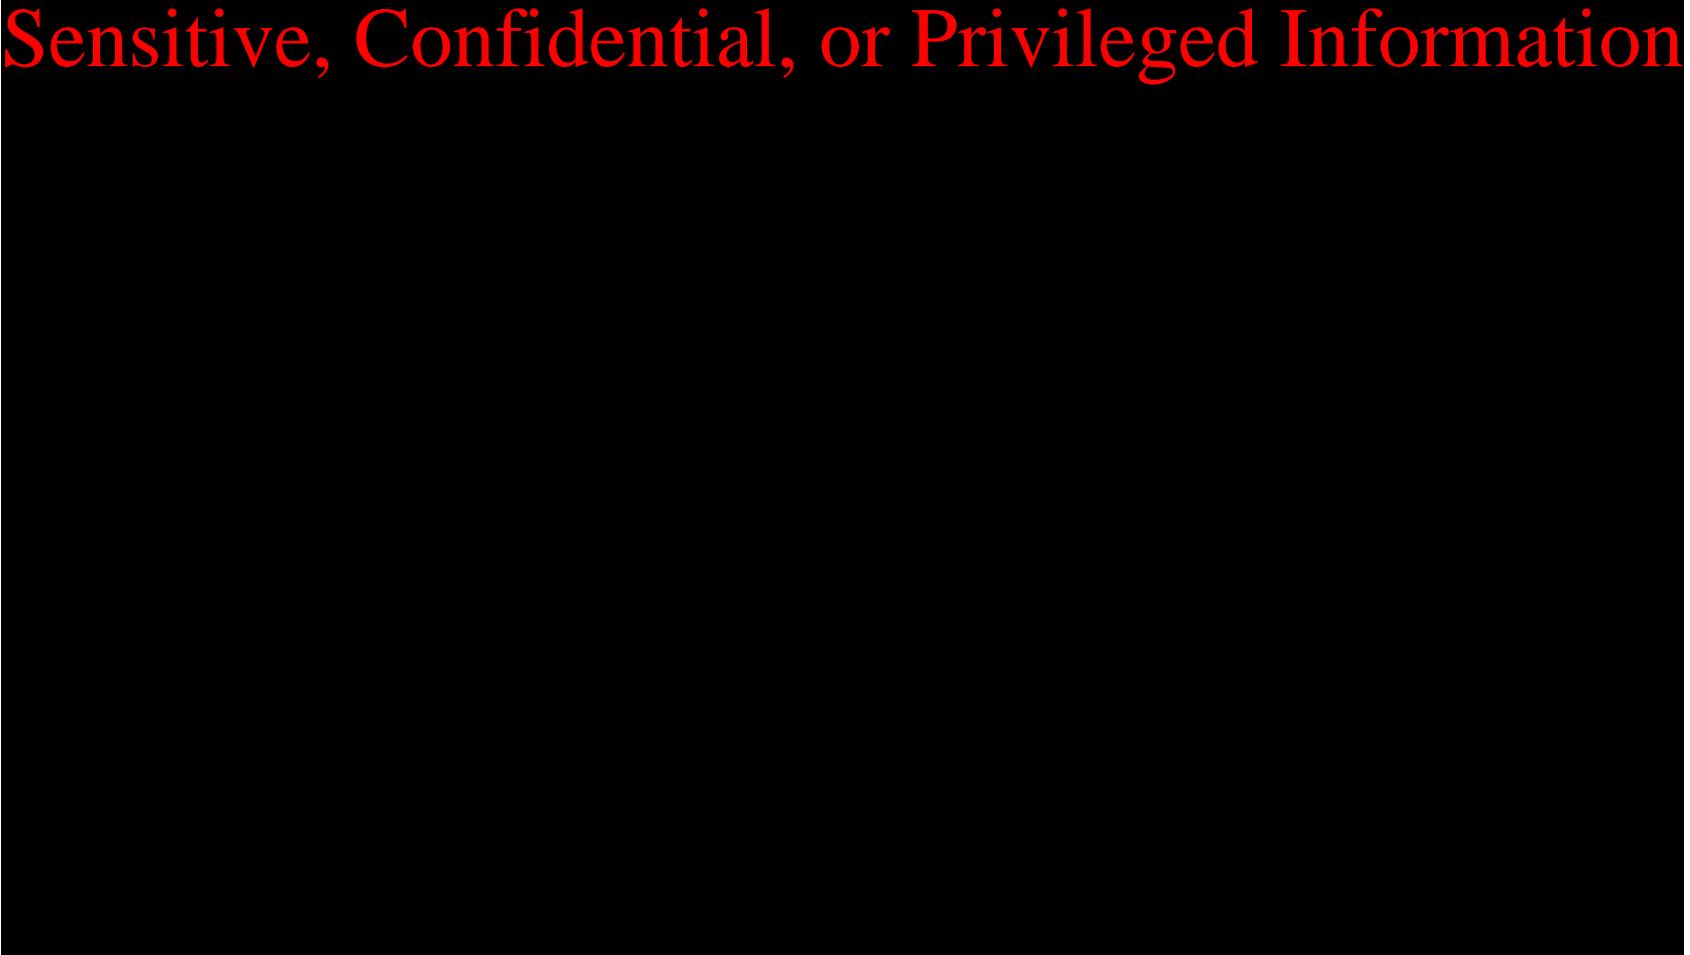


Table 4-6. Intermediate Casing Load Scenarios Evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information

Table 4-7. Long-String Casing Load Scenarios evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information

Table 4-8. Tubing load scenarios evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information	
1	2
3	4
5	6
7	8
9	10
11	12
13	14
15	16
17	18
19	20
21	22
23	24
25	26
27	28
29	30
31	32
33	34
35	36
37	38
39	40
41	42
43	44
45	46
47	48
49	50
51	52
53	54
55	56
57	58
59	60
61	62
63	64
65	66
67	68
69	70
71	72
73	74
75	76
77	78
79	80
81	82
83	84
85	86
87	88
89	90
91	92
93	94
95	96
97	98
99	100
101	102
103	104
105	106
107	108
109	110
111	112
113	114
115	116
117	118
119	120
121	122
123	124
125	126
127	128
129	130
131	132
133	134
135	136
137	138
139	140
141	142
143	144
145	146
147	148
149	150
151	152
153	154
155	156
157	158
159	160
161	162
163	164
165	166
167	168
169	170
171	172
173	174
175	176
177	178
179	180
181	182
183	184
185	186
187	188
189	190
191	192
193	194
195	196
197	198
199	200
201	202
203	204
205	206
207	208
209	210
211	212
213	214
215	216
217	218
219	220
221	222
223	224
225	226
227	228
229	230
231	232
233	234
235	236
237	238
239	240
241	242
243	244
245	246
247	248
249	250
251	252
253	254
255	256
257	258
259	260
261	262
263	264
265	266
267	268
269	270
271	272
273	274
275	276
277	278
279	280
281	282
283	284
285	286
287	288
289	290
291	292
293	294
295	296
297	298
299	300
301	302
303	304
305	306
307	308
309	310
311	312
313	314
315	316
317	318
319	320
321	322
323	324
325	326
327	328
329	330
331	332
333	334
335	336
337	338
339	340
341	342
343	344
345	346
347	348
349	350
351	352
353	354
355	356
357	358
359	360
361	362
363	364
365	366
367	368
369	370
371	372
373	374
375	376
377	378
379	380
381	382
383	384
385	386
387	388
389	390
391	392
393	394
395	396
397	398
399	400
401	402
403	404
405	406
407	408
409	410
411	412
413	414
415	416
417	418
419	420
421	422
423	424
425	426
427	428
429	430
431	432
433	434
435	436
437	438
439	440
441	442
443	444
445	446
447	448
449	450
451	452
453	454
455	456
457	458
459	460
461	462
463	464
465	466
467	468
469	470
471	472
473	474
475	476
477	478
479	480
481	482
483	484
485	486
487	488
489	490
491	492
493	494
495	496
497	498
499	500
501	502
503	504
505	506
507	508
509	510
511	512
513	514
515	516
517	518
519	520
521	522
523	524
525	526
527	528
529	530
531	532
533	534
535	536
537	538
539	540
541	542
543	544
545	546
547	548
549	550
551	552
553	554
555	556
557	558
559	560
561	562
563	564
565	566
567	568
569	570
571	572
573	574
575	576
577	578
579	580
581	582
583	584
585	586
587	588
589	590
591	592
593	594
595	596
597	598
599	600
601	602
603	604
605	606
607	608
609	610
611	612
613	614
615	616
617	618
619	620
621	622
623	624
625	626
627	628
629	630
631	632
633	634
635	636
637	638
639	640
641	642
643	644
645	646
647	648
649	650
651	652
653	654
655	656
657	658
659	660
661	662
663	664
665	666
667	668
669	670
671	672
673	674
675	676
677	678
679	680
681	682
683	684
685	686
687	688
689	690
691	692
693	694
695	696
697	698
699	700
701	702
703	704
705	706
707	708
709	710
711	712
713	714
715	716
717	718
719	720
721	722
723	724
725	726
727	728
729	730
731	732
733	734
735	736
737	738
739	740
741	742
743	744
745	746
747	748
749	750
751	752
753	754
755	756
757	758
759	760
761	762
763	764
765	766
767	768
769	770
771	772
773	774
775	776
777	778
779	780
781	782
783	784
785	786
787	788
789	790
791	792
793	794
795	796
797	798
799	800
801	802
803	804
805	806
807	808
809	810
811	812
813	814
815	816
817	818
819	820
821	822
823	824
825	826
827	828
829	830
831	832
833	834
835	836
837	838
839	840
841	842
843	844
845	846
847	848
849	850
851	852
853	854
855	856
857	858
859	860
861	862
863	864
865	866
867	868
869	870
871	872
873	874
875	876
877	878
879	880
881	882
883	884
885	886
887	888
889	890
891	892
893	894
895	896
897	898
899	900
901	902
903	904
905	906
907	908
909	910
911	912
913	914
915	916
917	918
919	920
921	922
923	924
925	926
927	928
929	930
931	932
933	934
935	936
937	938
939	940
941	942
943	944
945	946
947	948
949	950
951	952
953	954
955	956
957	958
959	960
961	962
963	964
965	966
967	968
969	970
971	972
973	974
975	976
977	978
979	980
981	982
983	984
985	986
987	988
989	990
991	992
993	994
995	996
997	998
999	1000

4.5.1. Casing Summary

Sensitive, Confidential, or Privileged Information

Please refer to

Table 4-11. Specifications of the Anticipated CO₂ Stream Composition

Component	Specification	Unit
Minimum CO ₂	98	mole%, dry basis
Water content	< / = 20	lb/MMscf
Impurities (dry basis):		
Total Hydrocarbons	< / = 2	mol%
Inert Gases (N ₂ , Ar, O ₂)	< / = 2	mol%
Hydrogen	< / = 1	mol%
Alcohols, aldehydes, esters	< / = 500	ppmv
Hydrogen Sulfide	< / = 100	ppmv
Total Sulfur	< / = 100	ppmv
Oxygen	< / = 100	ppmv
Carbon monoxide	< / = 100	ppmv
Glycol	< / = 1	ppmv

below for a summary of the properties and placement of casing strings within the casing program. All casing strings will be cemented to the surface in one or more stages in accordance with 40 CFR §146.86. The borehole diameters are considered conventional sizes for the sizes of casing that will be used and should allow ample clearance between the outside of the casing and the borehole wall to ensure that a continuous cement seal can be emplaced along the entire length of the casing string. Each section of the well is discussed in a separate subsection below.

4.5.2. Conductor Casing

The conductor casing consists of [Sensitive, Confidential, or Privileged Information] carbon steel pipe which will provide the stable base required for drilling activities in unconsolidated sediment. Depending on wellsite conditions, the conductor casing will be driven or drilled into shallow soils until striking bedrock

or casing can advance no further below the ground surface. The conductor casing will then be cemented in place.

4.5.3. *Surface Casing*

The surface casing consists of Sensitive, Confidential, or Privileged Information pipe with buttress thread couplings (BTC). The metallurgy of this casing string will be carbon steel and the surface casing string will be cemented to the surface. Prior to running the surface casing downhole, all appropriate logging and testing operations will be completed. The surface string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing* section of this permit for further details.

4.5.4. *Intermediate Casing*

The intermediate casing consists of Sensitive, Confidential, or Privileged Information pipe with BTC couplings. The intermediate string will extend from the ground surface to the top of the confining zone (Eau Claire). The metallurgy of this casing string will be carbon steel and the intermediate casing string will be cemented to the surface to isolate and protect USDW zones. Prior to running the intermediate casing downhole, all appropriate logging and testing operations will be completed. The intermediate string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing* section of this permit for further details.

4.5.5. *Long String Casing*

The long-string casing will be Sensitive, Confidential, or Privileged Information pipe composed of two sections. The uppermost section will extend from the ground surface to 500-feet from the top of the confining unit (Eau Claire) and will be comprised of Sensitive, Confidential, or Privileged Information carbon steel pipe with either long thread coupling (LTC) or BTC connections. Sensitive, Confidential, or Privileged Information



Upon selection of the proprietary seal type, the seal type will be communicated to the Director and HGCS will utilize such seal pending approval from the Director. Prior to running the intermediate casing downhole, all appropriate logging and testing operations will be completed. The long string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent

fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing Section* of this permit for further details.

4.6. Injection Well Tubing and Packer Program

The tubing connects the injection zone to the wellhead, providing a pathway for safely injecting and storing CO₂. In accordance with 40 CFR § 146.86 (c), the tubing and packer material used for construction of the NCV-5 injection well will be compatible with fluids with which the material may be expected to come into contact with and will meet or exceed API and ASTM international standards. HGCS will inject CO₂ through corrosion-resistant tubing with a packer set at a depth opposite a cemented interval a location approved by the Director. While selecting the tubing and packers for the NCV-5 injection, the following factors were taken into consideration:

1. Depth of setting;
2. Characteristics of the CO₂ stream (chemical content, corrosiveness, temperature, and density) and formation fluids;
3. Maximum proposed injection pressure;
4. Maximum proposed annular pressure;
5. Proposed injection rate (intermittent or continuous) and volume and/or mass of the CO₂ stream;
6. Size of tubing and casing; and
7. Tubing tensile strength, burst and collapse pressures.

A summary of these factors is available in **Table 4-10, Table 4-11, and Table 4-12**. Any change to the tubing and packer specifics detailed in the below will be communicated to the Director.

Sensitive, Confidential, or Privileged Information

A series of seven horizontal black bars of varying lengths, with the first bar containing the red text "Sensitive, Confidential, or Privileged Information".

The annulus between the tubing and long-string casing will be filled with noncorrosive fluid described in further detail within the annular fluid program in Section 4.8 below.

Table 4-9. HGSS Injection Well Casing Program and Properties of Materials.

Sensitive, Confidential, or Privileged Information

Table 4-10. Required Specifications for Tubing and Packer Selection and Placement (§146.86(c))

Parameter	Attribute	
Characteristics of the CO ₂ Stream	Chemical Content	Please refer to Table 4-11 below.
	Corrosiveness	<i>Stream will contain <50ppm of water and likely not to cause CO₂-driven corrosion</i>
	Temperature	50 °F (At wellhead) 131°F (Injection Zone)
	Density	57.26 lb/ft ³ (at wellhead, under 1400 psi) 49.65 lb/ft ³ (at injection zone, under 3,395 psi)
Characteristics of Formation Fluids (Mount Simon Reservoir)	Temperature	131 °F
	Formation Pressure	2,634 psi
	Fluid Density	68.5 lb/ft ³
	Salinity	160,000 Mg/L
Maximum Proposed Injection Pressure (Downhole)	3,711 psi	
Maximum Proposed Annular Pressure	3,961 psi	
Average Proposed Injection Rate (CO ₂)	2,740 Metric Tons/day	
Volume of CO ₂ Stream	53 MMCF/day	

Table 4-11. Specifications of the Anticipated CO₂ Stream Composition

Component	Specification	Unit
Minimum CO ₂	98	mole%, dry basis
Water content	< / = 20	lb/MMscf
Impurities (dry basis):		
Total Hydrocarbons	< / = 2	mol%
Inert Gases (N ₂ , Ar, O ₂)	< / = 2	mol%
Hydrogen	< / = 1	mol%
Alcohols, aldehydes, esters	< / = 500	ppmv
Hydrogen Sulfide	< / = 100	ppmv
Total Sulfur	< / = 100	ppmv
Oxygen	< / = 100	ppmv
Carbon monoxide	< / = 100	ppmv
Glycol	< / = 1	ppmv

Table 4-12. Tubing and Packer Details.

Item	Setting Depth (Approximate)	Tensile Strength (psi)	Burst Strength (psi)	Collapse Strength (psi)	Material (weight/grade/connection)
Tubing	Sensitive, Confidential, or Privileged Information				
<i>Packer</i> (Baker Hughes Model F Permanent Packer)					

***Setting depth interval is dependent on geological conditions observed in the field and is subject to change.**

** JFEBEAR™ or similar premium connection

4.7. Injection Well Cementing Program

This section discusses the types and quantities of cement that will be used for each string of casing during construction of the HGSS NCV-5 injection well. In accordance with 40 CFR §146.86, the cement and cement additives were designed to have sufficient quality and quantity to maintain seal integrity throughout the life of the HGSS project and are compatible with the fluids (CO₂ stream and formation fluids) with which the materials may be expected to come into contact and meet or exceed API and ASTM standards. The cementing program has been designed to prevent the movement of fluids out of the sequestration zone into overlying USDWs. The cementing program was designed while considering the following critical factors:


1. Depth to the sequestration zone;
2. Injection pressure, external pressure, internal pressure, and axial loading;
3. Hole sizes;
4. Size and grade of all casing strings (wall thickness, external diameter, nominal weight, length, joint specification, and construction material);
5. Corrosiveness of the CO₂ stream and formation fluids;
6. Downhole temperatures;
7. Lithology of sequestration and confining zones;
8. Type or grade of cement and cement additives; and
9. Quantity, chemical composition, and temperature of the CO₂ stream.

After cementing each casing string to the surface, the integrity and location of cement will be verified using a cement-bond log capable of evaluating the cemental quality radially and identifying the presence/location of channels to ensure against the likelihood of unintended release of CO₂ from the sequestration zone into the storage complex. Please refer to the pre-operational formation testing plan for further details. Any changes to the cement program will be communicated to the Director prior to well construction operations.

Table 4-13 below features the cement types, cement additives, quantities, and staging depths for each casing string. Each casing string will be cemented to the surface in one or more stages using the balance method. A sufficient number of casing centralizers will be used on all casing strings to centralize the casing in the hole and help ensure that cement completely surrounds the casing along the entire length of pipe. Except for the conductor casing, a guide shoe or float shoe will be run on the bottom of the bottom joint of casing and a float collar will be run on the top of the bottom joint of casing.

Due to the technical challenges involving cementing within geologic formations such as the Potosi Dolomite, the intermediate casing string of each HGSS injection well will be cemented in two stages. To facilitate a two-stage cement job, a multiple-stage cementing tool will be installed approximately 200 ft above the top of the Potosi Formation. After the completion of the first-stage cement job for the intermediate casing string, the multiple-stage cementing tool will be opened and fluid will be circulated down the casing and up the annulus above the cementing tool for a minimum of 8 hours to allow the first-stage cement job to acquire sufficient gel strength.

Sensitive, Confidential, or Privileged Information



Additionally, the excess space (“rathole”) from the top of the Argenta to the well’s terminal depth will be plugged back with EverCRETE to avoid unintended pressure transmission from the injection zone into the basement or near-basement zones. This will be likely be accomplished by setting the float shoe just above the top of the Argenta during long string cementing operations, however other methods may be considered. After an appropriate amount of setting time, cement-bond logs will be run and analyzed for each casing string as detailed in *Pre-operations Formation Testing Plan*.

Table 4-13. Specifications of the HGSS Cementing Program.


Sensitive, Confidential, or Privileged Information

4.8. Injection Well Annular Fluid

The annular space above the packer between the 9 5/8-inch long-string casing and the 5 1/2-inch injection tubing will be filled with a non-corrosive fluid to provide a positive pressure differential to stabilize the injection tubing and inhibit corrosion. The annular fluid will be a dilute salt solution such as potassium chloride (KCl), sodium chloride (NaCl), calcium chloride (CaCl₂), or similar solution. The fluid will be mixed onsite from dry salt and good quality (clean) freshwater, or it will be acquired pre-mixed. The fluid will also be filtered to ensure that solids do not interfere with the packer or other components of the annular protection system. The final choice of the type of fluid will depend on availability.

The annulus fluid will contain additives and inhibitors including a corrosion inhibitor, biocide (to prevent growth of harmful bacteria), and an oxygen scavenger. Example additives and inhibitors are listed below along with approximate mix rates:

Sensitive, Confidential, or Privileged Information

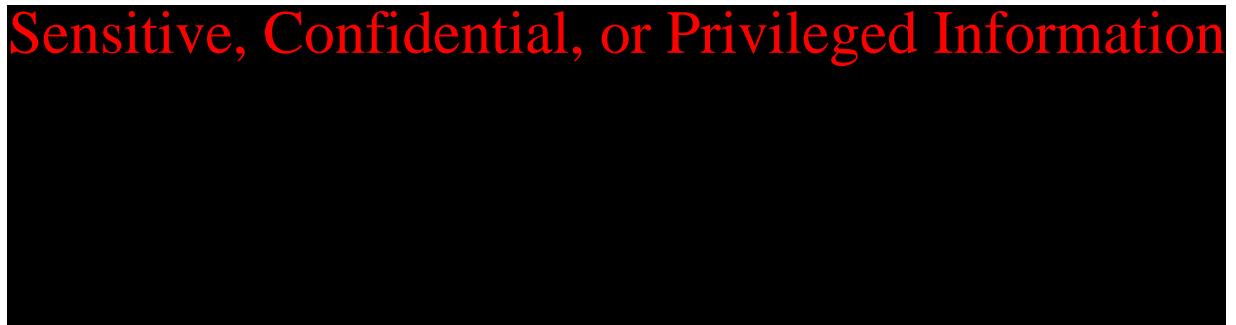

These products recommendations were provided by Tetra Technologies, Inc., of Houston, Texas. Actual products may vary from those described above.

4.9. Injection Wellhead and Valve Program


This section details the specifications of the injection wellheads and valves to be used for the NCV-5 injection well. All wellheads, valves, piping and surface facilities have been designed to meet or exceed API and ASTM international standards for the maximum anticipated injection pressure and will be maintained in a safe and leak-free condition. HGCS will equip all ports on the wellhead assembly above the casing bowl of injection wells with valves, blind flanges, or similar equipment. HGCS will also equip the injection well with valves to provide isolation of wells from the pipeline system and allow entry into the wells.

The HGSS NCV-5 injection wellhead will consist of the following components, from bottom to top:

Sensitive, Confidential, or Privileged Information



Sensitive, Confidential, or Privileged Information



The wellhead and Christmas tree will be composed of materials that are designed to be compatible with the injection fluid upon which the material may be expected to come into contact with. All components that encounter the CO₂ injection fluid will be made of a corrosion-resistant alloy such as stainless steel. Because the CO₂ injection fluid will be very dry, use of stainless-steel components for the flow-wetted components is a conservative measure to minimize corrosion and increase the life expectancy of this equipment. Materials that will not have contact with the injection fluid, such as the surface casing and shallow portion of the long string, will be manufactured of carbon steel. A preliminary materials specification for the wellhead and Christmas tree assembly is described in **Table 4-14** using material classes as defined in American Petroleum Institute (API) Specification 6A (Specification for Wellhead and Christmas Tree Equipment). A summary of material class definitions is provided in **Table 4-15**. The final wellhead and Christmas tree materials specification may vary slightly from the information given below because neither has been selected yet. A generalized illustration of the wellhead and Christmas tree is provided in **Figure 4-5**. If any changes are made to the wellhead and valve program, HGSC will communicate these changes to the Director and will finalize program specifics upon approval from the Director.

Table 4-14. Materials Specification of Wellhead and Christmas Tree.

Component	Material Class ^(a)
Casing Head Housing (for 20-in. surface casing)	Sensitive, Confidential, or Privileged Information
Casing Head Spool (for 13-3/8-in. intermediate casing)	
Tubing Spool Assembly (for 9-5/8-in. long-string casing)	
Christmas Tree	

(a) When multiple classes are given, the highest class applies. Cameron uses this convention because not all components are available in all class types.

Table 4-15. Material Classes from API 6A (Spec. for Wellhead and Christmas Tree Equipment).

API Material Class	Body, Bonnet, End & Outlet Connections	Pressure Controlling Parts, Stems, & Mandrel Hangers
AA – General Service	Sensitive, Confidential, or Privileged Information	
BB – General Service		
CC – General Service		
DD – Sour Service ^(a)		
EE – Sour Service ^(a)		
FF – Sour Service ^(a)		
HH – Sour Service ^(a)		

Source: Cameron Surface Systems, Houston, Texas

(a) As defined by National Association of Corrosion Engineers (NACE) Standard MR075.

(b) In compliance with NACE Standard MR0175.

Sensitive, Confidential, or Privileged Information

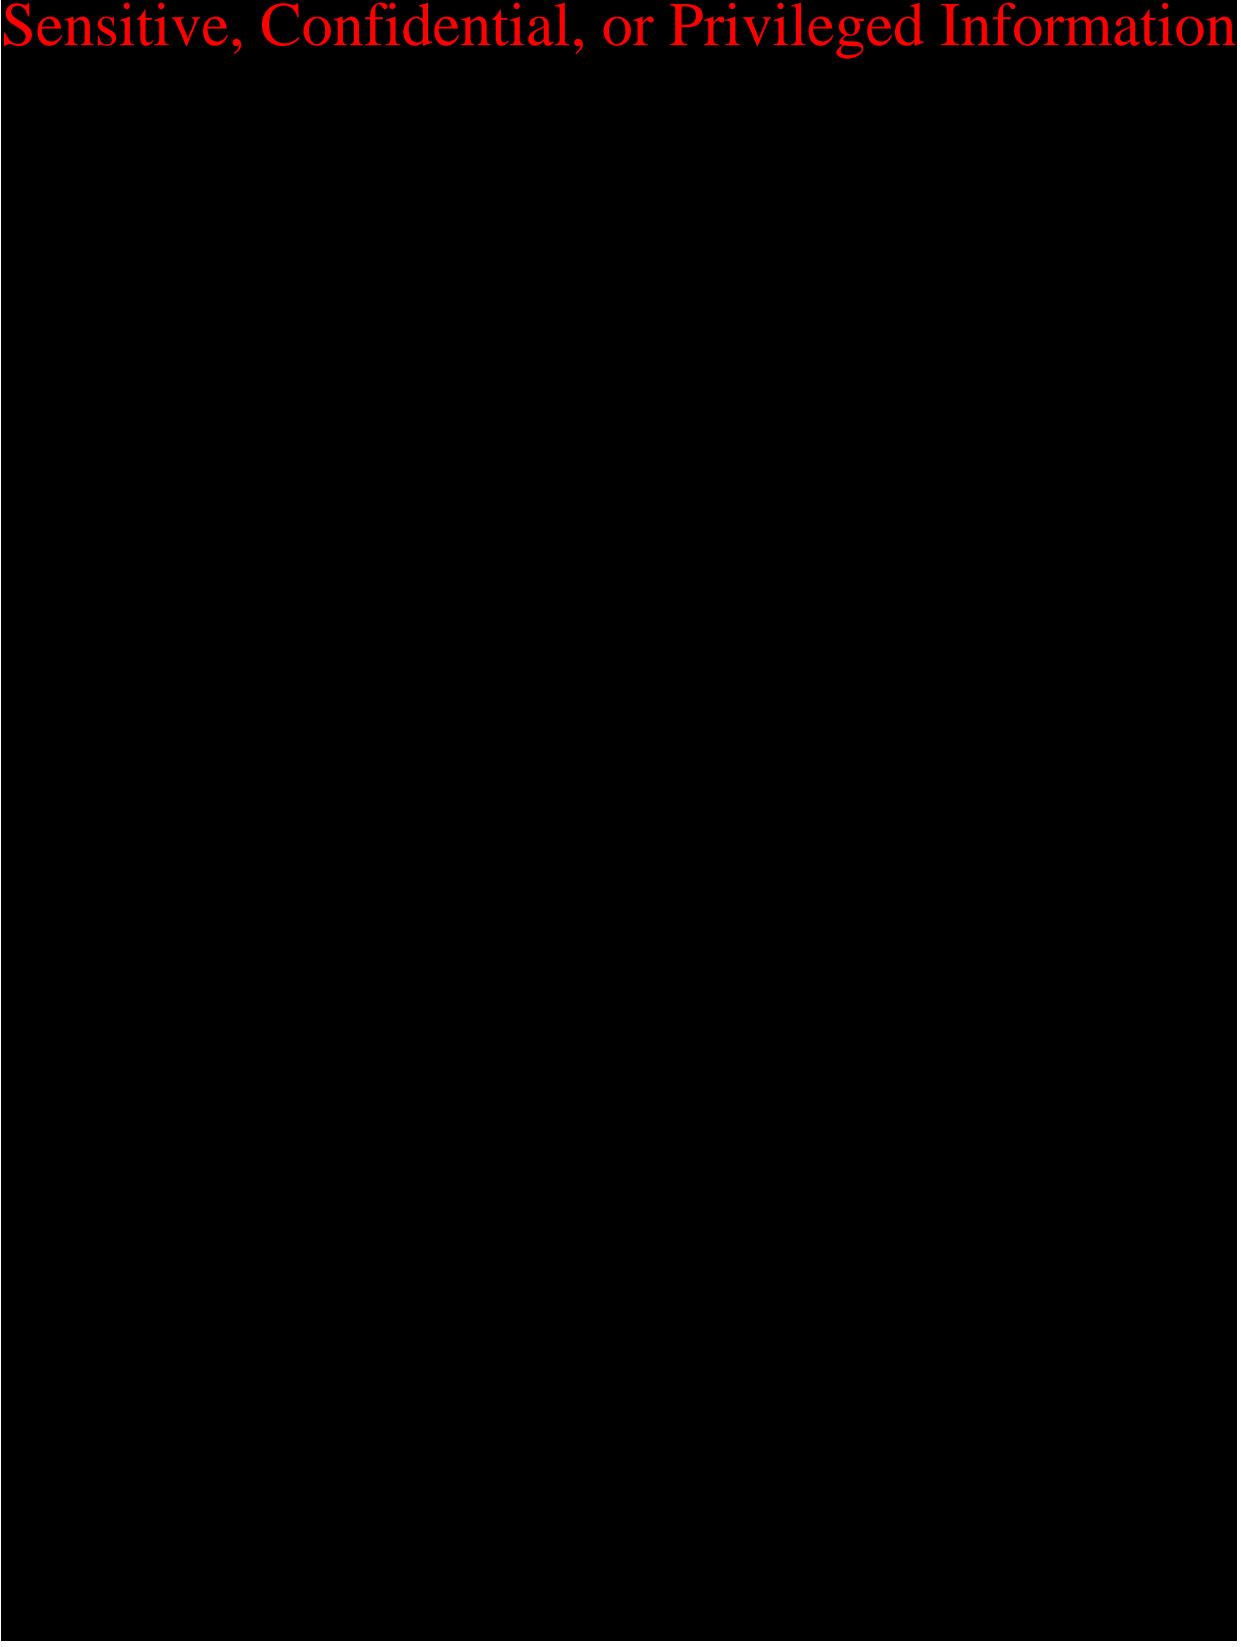


Figure 4-5. A design schematic of the HGSS injection wellhead and Christmas tree used for the NCV-5 CO₂ injection well.

4.10. Injection Well Routine Maintenance

HGCS will perform routine well maintenance on all injection wells. Routine maintenance will consist of wellhead valve maintenance and a review of recorded casing annular pressure measurements. If a significant deviation is noted (such that the mechanical integrity of the well is comprised or may become compromised), the appropriate remediation plan will be triggered. Please see the *Injection Well Operational Plan* and the *Emergency and Remedial Response Plan* sections for additional details.

4.11. Injection Well Perforation Program

The long-string casing will be perforated across the Mount Simon Sandstone with deep-penetrating shaped charges. The exact perforation interval will be determined after the well is drilled and characterized with geophysical logging/formation testing techniques. Sensitive, Confidential, or Privileged Information



4.12. Summary of Monitoring Technologies Deployed in Injection Wells

To meet monitoring and operational requirements of 40 CFR §146.90 and §146.88, several technologies will be deployed within-and-around the NCV-5 injection well to monitor critical parameters needed to ensure sustained integrity of the HGSS storage complex and protection of overlying USDWs. **Table 4-16** below details the suite of monitoring technologies that will be deployed directly within or around injection wellbore and surface injection wellhead/tree assemblies. Please refer to the testing and monitoring section of this permit for a more detailed breakdown of the HGSS monitoring network, monitoring technologies and monitoring strategies.

Table 4-16. *Technologies Deployed in NCV-5 Injection Well for Monitoring Purposes

Device(s)	Location	Purpose	Monitoring category
Wellhead Pressure-Temperature Gauge	<small>Sensitive, Confidential, or Privileged Information</small>	Wellhead Injection Pressure and temperature	CO ₂ Injection Process Monitoring
Downhole Pressure - Temperature Gauge		Reservoir & Bottom-Hole Pressure/Temperature	
Continuous Annular Pressure Gauge		Annular Pressure Monitoring	


Device(s)	Location	Purpose	Monitoring category
Downhole Pressure-Temperature Gauge	Sensitive, Confidential, or Privileged Information	Annular Pressure Monitoring	
Distributed Temperature Sensing (DTS)		Distributed Temperature Monitoring (Reservoir, Upper Mt. Simon, Eau Claire, Argenta, Precambrian Basement)	CO ₂ Injection Process Monitoring & In-direct Plume Monitoring
Daniel Sr Orifice Mass Flow Meter		Injection Rate and Volume	CO ₂ Injection Process Monitoring
Distributed Acoustic Sensing Fiber Optics (DAS)		3D/4D VSP & Microseismic	In-direct Plume Monitoring & Seismicity Monitoring
Boreal Laser Gas Detection System		Leak Detection	Surface or Near Surface Monitoring

*Note this list of technology does not encompass all monitoring technologies deployed within the HGSS monitoring network; please refer to the testing and monitoring section for a detailed breakdown of the HGSS monitoring network and strategy.

4.13. Schematic of the Subsurface Construction Details of the HGSS Injection Wells

A generalized schematic of the HGSS NCV-5 injection well is shown in **Figure 4-6**. As discussed in the previous sections, the injection well will include the following casing strings:

Sensitive, Confidential, or Privileged Information

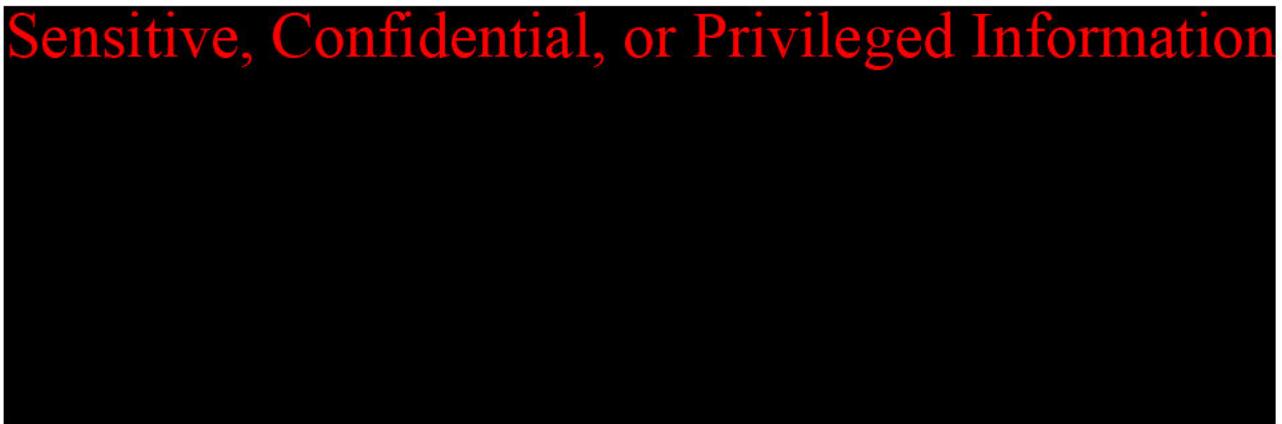

All depths are preliminary and will be adjusted based on additional characterization data obtained while drilling the CO₂ injection wells. The conductor, surface, intermediate, and long casing strings will be cemented to surface in accordance with 40 CFR § 146.86. The purpose of the conductor string is to provide a stable borehole across the near-surface, unconsolidated glacial deposits before drilling the remaining deeper casing strings and to help protect the

USDWs. Groundwater in the vicinity of the site is normally obtained from sand and gravel deposits that are contained within the unconsolidated Quaternary-aged material above bedrock. According to the Illinois Geological Survey ILWATER map, unconsolidated sand, and gravel deposits within the vicinity of the proposed site can range in depth from about 0 to 500 ft bgs and bedrock can range in depth from 400-600 feet bgs. The surface string will extend across the uppermost bedrock layers (Pennsylvanian age) and will help to further isolate and protect the USDWs. The intermediate casing string will extend across and isolate deeper potentially unstable layers or layers where there is potential for lost circulation to ensure that the well can be drilled to total depth, in addition to isolating and protecting the deeper USDWs (St. Peter Sandstone).

Sensitive, Confidential, or Privileged Information



Sensitive, Confidential, or Privileged Information

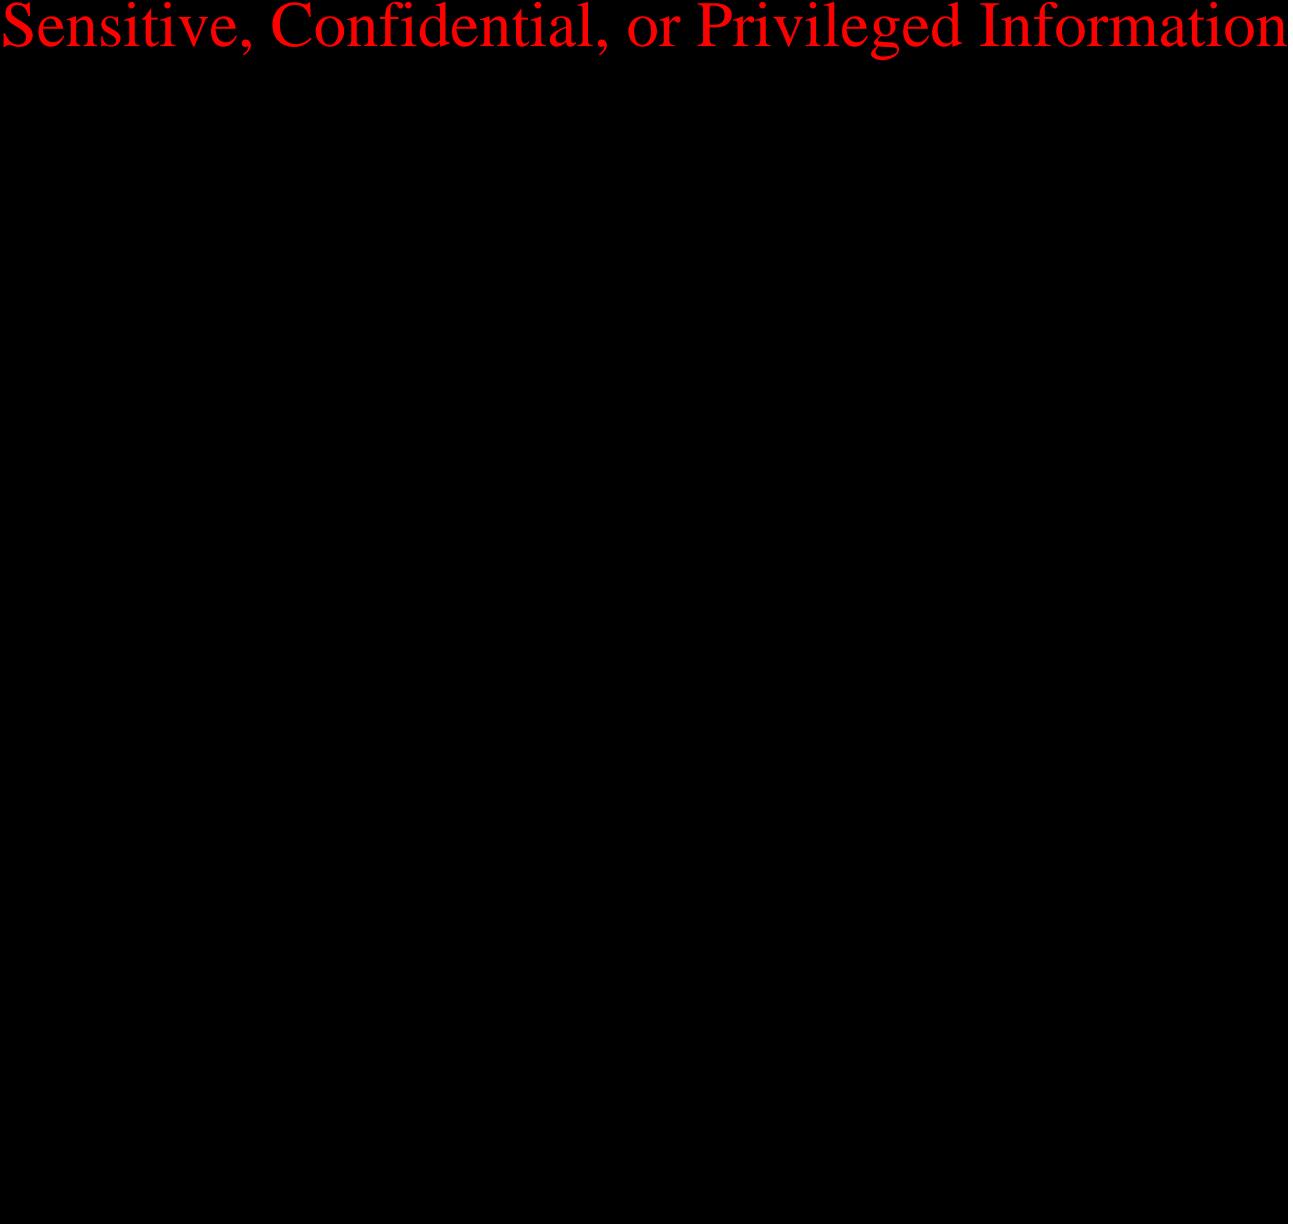


Figure 4-6. Design schematic of HGSS NCV-5 CO₂ injection well.

TABLE OF CONTENTS

4	INJECTION WELL CONSTRUCTION PLAN	3
4.1.	Injection Well Construction Overview	3
4.2.	Proposed Stimulation Program [40 CFR § 146.82(a)(9)]	4
4.3.	Construction Procedures [40 CFR § 146.82(a)(12)]	4
4.4.	Maximum Wellhead Injection Pressure	6
4.5.	Casing Program	10
4.6.	Injection Well Tubing and Packer Program	19
4.7.	Injection Well Cementing Program	22
4.8.	Injection Well Annular Fluid	25
4.9.	Injection Wellhead and Valve Program	25
4.10.	Injection Well Routine Maintenance	29
4.11.	Injection Well Perforation Program	29
4.12.	Summary of Monitoring Technologies Deployed in Injection Wells	29
4.13.	Schematic of the Subsurface Construction Details of the HGSS Injection Wells.....	30

LIST OF FIGURES

Figure 4-1.	Nodal analysis results showing the operating points for the three tubing sizes modelled.....	7
Figure 4-2.	Tubing and casing design based on the nodal analysis results.....	8
Figure 4-3.	Pressure versus depth for injection of the maximum injection rate with wellhead pressure set to 1200 psi.....	9
Figure 4-4.	Pressure versus depth for injection of the average injection rate with wellhead pressure set to 1200 psi.....	9
Figure 4-5.	A design schematic of the HGSS injection wellhead and Christmas tree used for the NCV-6 CO ₂ injection well.....	29
Figure 4-6.	Design schematic of HGSS NCV-6 CO ₂ injection well	32

LIST OF TABLES

Table 4-1.	Summary Table of Well Information for NCV-6.....	3
Table 4-2.	Summary Table of Generalized Completion Depth Intervals for NCV-6.....	4
Table 4-3.	NCV-6 Parameters Used in the Nodal Analysis Simulation	6
Table 4-4.	Minimum Design Factors	11

Table 4-5. Surface Casing Load Scenarios Evaluated showing the design factors for each scenario.....	13
Table 4-6. Intermediate Casing Load Scenarios Evaluated showing the design factors for each scenario.....	14
Table 4-7. Long-String Casing Load Scenarios evaluated showing the design factors for each scenario.....	15
Table 4-8. Tubing load scenarios evaluated showing the design factors for each scenario.	16
Table 4-9. HGSS Injection Well Casing Program and Properties of Materials.....	20
Table 4-10. Required Specifications for Tubing and Packer Selection and Placement (§146.86(c))	21
Table 4-11. Specifications of the Anticipated CO ₂ Stream Composition.....	21
Table 4-12. Tubing and Packer Details.....	22
Table 4-13. Specifications of the HGSS Cementing Program.....	24
Table 4-14. Materials Specification of Wellhead and Christmas Tree.....	27
Table 4-15. Material Classes from API 6A (Spec. for Wellhead and Christmas Tree Equipment).	27
Table 4-16. *Technologies Deployed in NCV-6 Injection Well for Monitoring Purposes.....	29

4 INJECTION WELL CONSTRUCTION PLAN
40 CFR 146.82(a) (9), (11), (12)

Heartland Greenway Storage Site NCV-6 Injection Well

Facility Information

Facility name: Heartland Greenway Storage Site (HGSS)
NCV-6
Facility Operator: Heartland Greenway Carbon Storage, LLC (HGCS)
Facility Contact: David Giles, President and COO
2626 Cole Ave., Dallas, Texas, USA 75204
Phone: (210) 880-6000; Email: dgiles@navco2.com
Project Location: Taylorville, Christian County, Illinois
39.654806 / -89.302665

4.1. Injection Well Construction Overview

Heartland Greenway Carbon Storage LLC. (HGCS) seeks to drill and construct a new Class VI CO₂ Injection well, NCV-6, within the Heartland Greenway Storage Site (HGSS) to support CO₂ storage operations and has designed this well construction plan in accordance with 40 CFR §146.86, pursuant to 40 CFR §146.82. HGCS has implemented well design strategies and materials focused on (1) preventing movement of fluids into or between USDWS or into any authorized zones; (2) permitting the use of appropriate testing devices and workover tools and; (3) permit continuous monitoring of the annulus space between the tubing and long string casing. Any necessary changes to this well plan due to logistical or geological conditions encountered within the field will be communicated to the Director prior to well construction. A summary of the spatial location, coordinates and well API/UWI values for NCV-6 are shown below in **Table 4-1**, and general well construction details are detailed below in **Table 4-2**.

Table 4-1. Summary Table of Well Information for NCV-6.

Well Name	Location (LAT/LONG) ±300 ft	API	Operator	Completion Footages	Total Depth
NCV-6	39.654806 / -89.302665	TBD	<i>Heartland Greenway Carbon Storage, LLC</i>	5876-6176	6407

Table 4-2. Summary Table of Generalized Completion Depth Intervals for NCV-6

Casing	T.O.C-Shoe Depth (ft. MD.)	Open Hole Diameter (inches)	Comment
30" Conductor	Sensitive, Confidential, or Privileged Information		Driven or drilled into shallow soils until refusal
20" Surface			Ran through shallow USDWs
13 3/8" Intermediate			Ran through deepest USDW to top of Eau Claire Caprock
9 5/8" Long String			Ran to well terminal depth (Precambrian)

4.2. Proposed Stimulation Program [40 CFR § 146.82(a)(9)]

While not anticipated based on existing interpolations of reservoir quality, a well stimulation program (such as an acid wash) may be proposed by HGCS based on geologic conditions and data identified during drilling and well testing/logging operations. If well stimulation is determined to be required to meet injection goals of the NCV-6 well, HGCS will complete the required stimulation plan [attached to this permit] and communicate the details of the well stimulation program to the Director. HGCS will not proceed with well stimulation operations until approval is received.

4.3. Construction Procedures [40 CFR § 146.82(a)(12)]

The NCV-6 injection well has been designed to accommodate the mass of CO₂ that will be delivered to it, while considering critical characteristics of the CO₂ storage reservoir which affect the well design. Well design principals and materials detailed in subsequent sections were selected and vetted to ensure construction materials have sufficient structural strength to provide sustained mechanical integrity throughout the life of the CCS project in addition to permitting the use of appropriate testing devices, workover tools and continuous monitoring of the annulus space between the injection tubing and long string casing. All well construction materials were selected to be compatible with fluids of which they may be expected to come into contact (e.g., corrosion-resistant cement) and meet or exceed API and ASTM International standards.

This plan illustrates the comprehensive analysis performed to comply with and exceed the standards detailed in 40 CFR §146.86 and other related sections (§146.87, 146.88, 146.89, 146.90, 146.94 (a), 146.91), in pursuant to 40 CFR § 146.82 regarding the design of the injection well casing, cement, and wellhead and their relation to subsequent testing, monitoring, and reporting activities.

The construction of the NCV-6 injection well within the Heartland Greenway Storage site will be performed using best practices and will conform to all requirements of Class VI Rule VI at 40 CFR 146.86(b). The drilling of the injection well in this part of the Illinois Basin is straightforward with very few known drilling hazards apart from a possible lost circulation zone in the Potosi formation within the intermediate section of the well. The surface casing will be set [REDACTED] bgs and will be cemented to surface so that any shallow USDW aquifers will be protected. A normal [REDACTED] mud weight will prevent any movement of fluids from one aquifer to another. An intermediate section is planned from the base of the surface casing to the top of the Eau Claire formation which will also cover the St. Peter formation. This section will pass through the Potosi formation, previously recognized as a potential lost circulation zone. If a loss of circulation is encountered, lost circulation materials will be used to regain circulation. If lost circulation materials are not successful, cement plugs will be placed across the zone to enable the well to be drilled to casing point. The intermediate casing will be cemented in two stages with the first stage covering from T.D. at the top of the Eau Claire formation to just above the Potosi formation. The well will be circulated until the first stage cement is set through a stage collar and then the second stage will place cement from the stage collar to surface. The T.D. section will then be drilled through the Eau Claire formation, through the Mt. Simon formation and reaching total depth in basement rocks. The long string casing will then be cemented from T.D. back to surface. While drilling each section of the well the deviation will be checked to ensure that the well stays as close to vertical as possible with the deviation staying below five degrees and no section of the well will have a dog-leg severity greater than [REDACTED]. Should a deviation correction be required directional drilling tools will be employed. There are no known abnormal pressure formation in this area so mud weights of [REDACTED] will provide well control. The casing and cements to be used in construction of the NCV-6 well will be compatible with the injected CO₂. A minimum of CR-13 casing will be used across the injection zone and caprock and on the lower section of the intermediate casing. This design has been confirmed with manufacturer testing performed to ASTM and Corrosion Standards. Cement across these sections will be CO₂ resistant as shown by API and ASTM testing.

The targeted injection formation will be tested prior to final completion by step-rate and pressure fall-off testing. These tests will confirm that the proposed injection zone will be able to receive the required volume of CO₂ while injection pressures will stay below fracturing pressure. The injection tubing will be a minimum of CR-13 and will be sized to accommodate the expected injection rate. The size of the wellbore will allow monitoring equipment to be placed in the wellbore so that injection and annular pressure can be monitored. The tubing will also be sized such that surveillance logging can be accommodated. More detail of the well construction methods and materials will be found in the following sections.

4.4. Maximum Wellhead Injection Pressure

A nodal analysis was conducted to determine the injection tubing diameter for the NCV-6 CO₂ injection well. Nodal analysis identifies the operating point where inflow at the top of the well and outflow at the bottom of the well match for different sizes of tubing, allowing a tubing size to be selected that meets the project needs of approximately one million metric tons per year (2740 metric tons per day) injected per well on average and a maximum rate of 1.34 million metric tons per year (3671 metric tons per day). Schlumberger's PIPESIM software was used to size the injection tubing.

Sensitive, Confidential, or Privileged Information



Table 4-3. NCV-6 Parameters Used in the Nodal Analysis Simulation

Nodal Analysis Assumption	Value
Long Casing Size	Sensitive, Confidential, or Privileged Information
Perforation Zone	
Perforation Specifics	
Reservoir Temperature	
Permeability	
Reservoir pressure gradient	
Wellhead Pressure	

Sensitive, Confidential, or Privileged Information




Figure 4-1. Nodal analysis results showing the operating points for the three tubing sizes modelled.

The results of the nodal analysis were used to update the PIPESIM flow model to have a 13 3/8 inch 61 lb/ft intermediate casing set at 4948 ft and a 9 5/8 inch 47 lb/ft long-string casing set at 6431 ft that contains a 5 1/2 inch 17lb/ft with a packer set at 5900 ft. This design is illustrated in **Figure 4-2** below. Using this design injection was modeled and the results for both the maximum rate (**Figure 4-3**) and average rate (**Figure 4-4**) show that 5 1/2 17 lb/ft tubing will meet the project requirements.

Sensitive, Confidential, or Privileged Information




Figure 4-2. Tubing and casing design based on the nodal analysis results.

Sensitive, Confidential, or Privileged Information

Figure 4-3. Pressure versus depth for injection of the maximum injection rate with wellhead pressure set to 1200 psi.

Sensitive, Confidential, or Privileged Information

Figure 4-4. Pressure versus depth for injection of the average injection rate with wellhead pressure set to 1200 psi.

4.5. Casing Program

The NCV-6 injection well design has been developed to accommodate a 5 1/2-inch outer diameter (OD) tubing string, based on the nodal analysis presented in the previous section and was designed to accommodate the concentric casing sizes required to isolate the injection reservoir from USDWs and prevent fluid flow into any unauthorized zones. In accordance with 40 CFR § 146.86, the casing program was designed while considering the following factors:

- 1) Depth to the injection zone;
- 2) Injection pressure, external pressure, internal pressure, and axial loading;
- 3) Hole sizes;
- 4) Size and grade of all casing strings (wall thickness, external diameter, nominal weight, length, joint specification, and construction material);
- 5) Corrosiveness of the CO₂ stream and formation fluids;
- 6) Downhole temperatures;
- 7) Lithology of injection and confining zones;
- 8) Type or grade of cement and cement additives;
- 9) Quantity, chemical composition, and temperature of the CO₂ stream;

In accordance with 40 CFR §146.87, prior to running each casing string, all open-hole logging and testing operations (deviation surveys, open hole logging, formation testing) will be completed. Please see the *Pre-operations Formation Testing section* of this permit for a detailed breakdown of which specific methods and tools will be utilized for the well.

To prevent unintended fluid migration and protect USDW integrity, the surface casing string will extend through shallow USDWs, the intermediate casing string will extend through the lowermost USDW aquifer (St. Peter Sandstone), and the long string casing will extend from the surface through the injection interval with a sufficient number of centralizers. All casing strings will be cemented in place to the surface in one or more stages (see the cementing program below for additional detail).

The metallurgy for each casing string was selected to be compatible with the fluids and stresses encountered within the well and meet or exceed API and ASTM standards. Sensitive, Confidential, or Privileged Information



Casing loadings were modelled using Schlumberger's Tubing Design and Analysis (TDAS) software. To ensure sufficient structural strength and mechanical integrity throughout the life of the HGSS project, stresses were analyzed and calculated according to worst-case scenarios and tubular specifications were selected accordingly. Minimum design factors are presented in **Table**

4-4. Table 4-5 through Table 4-8 below summarize the results of this stress analysis. The burst, collapse, and tensile strength of each tubular was calculated according to the scenarios defined below and was dependent on fracture gradients, mud weight, depths, and minimum safety factors.

As demonstrated, these safety factors are sufficient in the worst-case scenarios to prevent migration of fluids into or out of USDWs or unauthorized zones. The casing and tubing materials are designed to be compatible with the fluids encountered and the stresses induced throughout the sequestration project. Schlumberger Integrated Drilling Systems design standards were incorporated for the casing design calculations, and Schlumberger Completions group standards were incorporated for the tubing design calculations.

Table 4-4. Minimum Design Factors.

Load	Casing Design Criteria	Tubing Design Criteria
Burst	Sensitive, Confidential, or Privileged Information	
Collapse		
Tension		
Compression		
VME		

The casing installed in any well should be designed to withstand collapse loading based on the following assumption:

1. The hydrostatic head of the drilling fluid in which the casing is run acts on the exterior of the casing at any given depth;
2. Subject to the casing is 1/3 evacuated;
3. The production casing is completely evacuated;
4. The effect of axial stresses on collapse resistance shall be considered; and
5. The effect of temperature deration and casing wear shall be considered.

Any casing/liner that creates an annular space with the production tubing shall be treated as a production casing/liner. The casing installed in any well shall be designed to withstand tensile loading based on the following assumptions:

1. The weight of casing is its weight in air; and
2. The tensile strength of the casing is the yield strength of the casing wall or of the joint, whichever is the lesser.

The following additional assumptions were made during the design process for the Injection wells:

1. A 5% casing wear due to Bottomhole Assembly (BHA) rotation is assumed on all casing design segments with consecutive hole sections;

2. Wall tolerance of 87.5% is assumed as per API standards;
3. Temperature deration is considered on the design of the 13-3/8-inch and 9-5/8- inch casing strings; and
4. The 13-3/8-inch casing is being proposed and engineered to be required to comply with a casing design to pass a 1/3 evacuation loading on collapse.

If the casing recommended is not available, final casing selection would be based on what other technical options are currently available and what might in stock in US-based tubular suppliers' inventory. The minimum criteria for an alternate design would be to exceed standard design criteria.

Table 4-5. Surface Casing Load Scenarios Evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information	
1	
2	
3	
4	
5	
6	
7	
8	
9	
10	
11	
12	
13	
14	
15	
16	
17	
18	
19	
20	
21	
22	
23	
24	
25	
26	
27	
28	
29	
30	
31	
32	
33	
34	
35	
36	
37	
38	
39	
40	
41	
42	
43	
44	
45	
46	
47	
48	
49	
50	
51	
52	
53	
54	
55	
56	
57	
58	
59	
60	
61	
62	
63	
64	
65	
66	
67	
68	
69	
70	
71	
72	
73	
74	
75	
76	
77	
78	
79	
80	
81	
82	
83	
84	
85	
86	
87	
88	
89	
90	
91	
92	
93	
94	
95	
96	
97	
98	
99	
100	
101	
102	
103	
104	
105	
106	
107	
108	
109	
110	
111	
112	
113	
114	
115	
116	
117	
118	
119	
120	
121	
122	
123	
124	
125	
126	
127	
128	
129	
130	
131	
132	
133	
134	
135	
136	
137	
138	
139	
140	
141	
142	
143	
144	
145	
146	
147	
148	
149	
150	
151	
152	
153	
154	
155	
156	
157	
158	
159	
160	
161	
162	
163	
164	
165	
166	
167	
168	
169	
170	
171	
172	
173	
174	
175	
176	
177	
178	
179	
180	
181	
182	
183	
184	
185	
186	
187	
188	
189	
190	
191	
192	
193	
194	
195	
196	
197	
198	
199	
200	
201	
202	
203	
204	
205	
206	
207	
208	
209	
210	
211	
212	
213	
214	
215	
216	
217	
218	
219	
220	
221	
222	
223	
224	
225	
226	
227	
228	
229	
230	
231	
232	
233	
234	
235	
236	
237	
238	
239	
240	
241	
242	
243	
244	
245	
246	
247	
248	
249	
250	
251	
252	
253	
254	
255	
256	
257	
258	
259	
260	
261	
262	
263	
264	
265	
266	
267	
268	
269	
270	
271	
272	
273	
274	
275	
276	
277	
278	
279	
280	
281	
282	
283	
284	
285	
286	
287	
288	
289	
290	
291	
292	
293	
294	
295	
296	
297	
298	
299	
300	
301	
302	
303	
304	
305	
306	
307	
308	
309	
310	
311	
312	
313	
314	
315	
316	
317	
318	
319	
320	
321	
322	
323	
324	
325	
326	
327	
328	
329	
330	
331	
332	
333	
334	
335	
336	
337	
338	
339	
340	
341	
342	
343	
344	
345	
346	
347	
348	
349	
350	
351	
352	
353	
354	
355	
356	
357	
358	
359	
360	
361	
362	
363	
364	
365	
366	
367	
368	
369	
370	
371	
372	
373	
374	
375	
376	
377	
378	
379	
380	
381	
382	
383	
384	
385	
386	
387	
388	
389	
390	
391	
392	
393	
394	
395	
396	
397	
398	
399	
400	
401	
402	
403	
404	
405	
406	
407	
408	
409	
410	
411	
412	
413	
414	
415	
416	
417	
418	
419	
420	
421	
422	
423	
424	
425	
426	
427	
428	
429	
430	
431	
432	
433	
434	
435	
436	
437	
438	
439	
440	
441	
442	
443	
444	
445	
446	
447	
448	
449	
450	
451	
452	
453	
454	
455	
456	
457	
458	
459	
460	
461	
462	
463	
464	
465	
466	
467	
468	
469	
470	
471	
472	
473	
474	
475	
476	
477	
478	
479	
480	
481	
482	
483	
484	
485	
486	
487	
488	
489	
490	
491	
492	
493	
494	
495	
496	
497	
498	
499	
500	
501	
502	
503	
504	
505	
506	
507	
508	
509	
510	
511	
512	
513	
514	
515	
516	
517	
518	
519	
520	
521	
522	
523	
524	
525	
526	
527	
528	
529	
530	
531	
532	
533	
534	
535	
536	
537	
538	
539	
540	
541	
542	
543	
544	
545	
546	
547	
548	
549	
550	
551	
552	
553	
554	
555	
556	
557	
558	
559	
560	
561	
562	
563	
564	
565	
566	
567	
568	
569	
570	
571	
572	
573	
574	
575	
576	
577	
578	
579	
580	
581	
582	
583	
584	
585	
586	
587	
588	
589	
590	
591	
592	
593	
594	
595	
596	
597	
598	
599	
600	
601	
602	
603	
604	
605	
606	
607	
608	
609	
610	
611	
612	
613	
614	
615	
616	
617	
618	
619	
620	
621	
622	
623	
624	
625	
626	
627	
628	
629	
630	
631	
632	
633	
634	
635	
636	
637	
638	
639	
640	
641	
642	
643	
644	
645	
646	
647	
648	
649	
650	
651	
652	
653	
654	
655	
656	
657	
658	
659	
660	
661	
662	
663	
664	
665	
666	
667	
668	
669	
670	
671	
672	
673	
674	
675	
676	
677	
678	
679	
680	
681	
682	
683	
684	
685	
686	
687	
688	
689	
690	
691	
692	
693	
694	
695	
696	
697	
698	

Table 4-6. Intermediate Casing Load Scenarios Evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information

Table 4-7. Long-String Casing Load Scenarios evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information

Table 4-8. Tubing load scenarios evaluated showing the design factors for each scenario.

Sensitive, Confidential, or Privileged Information

4.5.1. Casing Summary

Sensitive, Confidential, or Privileged Information

Please refer to

Table 4-11. Specifications of the Anticipated CO₂ Stream Composition

Component	Specification	Unit
Minimum CO ₂	98	mole%, dry basis
Water content	< / = 20	lb/MMscf
Impurities (dry basis):		
Total Hydrocarbons	< / = 2	mol%
Inert Gases (N ₂ , Ar, O ₂)	< / = 2	mol%
Hydrogen	< / = 1	mol%
Alcohols, aldehydes, esters	< / = 500	ppmv
Hydrogen Sulfide	< / = 100	ppmv
Total Sulfur	< / = 100	ppmv
Oxygen	< / = 100	ppmv
Carbon monoxide	< / = 100	ppmv
Glycol	< / = 1	ppmv

below for a summary of the properties and placement of casing strings within the casing program. All casing strings will be cemented to the surface in one or more stages in accordance with 40 CFR §146.86. The borehole diameters are considered conventional sizes for the sizes of casing that will be used and should allow ample clearance between the outside of the casing and the borehole wall to ensure that a continuous cement seal can be emplaced along the entire length of the casing string. Each section of the well is discussed in a separate subsection below.

4.5.2. Conductor Casing

The conductor casing consists of Sensitive, Confidential, or Privileged Information carbon steel pipe which will provide the stable base required for drilling activities in unconsolidated sediment. Depending on wellsite conditions, the conductor casing will be driven or drilled into shallow soils until striking bedrock

or casing can advance no further below the ground surface. The conductor casing will then be cemented in place.

4.5.3. *Surface Casing*

The surface casing consists of Sensitive, Confidential, or Privileged Information grade pipe with buttress thread couplings (BTC). The metallurgy of this casing string will be carbon steel and the surface casing string will be cemented to the surface. Prior to running the surface casing downhole, all appropriate logging and testing operations will be completed. The surface string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing* section of this permit for further details.

4.5.4. *Intermediate Casing*

The intermediate casing consists of Sensitive, Confidential, or Privileged Information grade pipe with BTC couplings. The intermediate string will extend from the ground surface to the top of the confining zone (Eau Claire). The metallurgy of this casing string will be carbon steel and the intermediate casing string will be cemented to the surface to isolate and protect USDW zones. Prior to running the intermediate casing downhole, all appropriate logging and testing operations will be completed. The intermediate string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing* section of this permit for further details.

4.5.5. *Long String Casing*

The long-string casing will be Sensitive, Confidential, or Privileged Information pipe composed of two sections. The uppermost section will extend from the ground surface to 500-feet from the top of the confining unit (Eau Claire) and will be comprised of Sensitive, Confidential, or Privileged Information carbon steel pipe with either long thread coupling (LTC) or BTC connections. Sensitive, Confidential, or Privileged Information

[REDACTED]

[REDACTED]

[REDACTED]

Upon selection of the proprietary seal type, the seal type will be communicated to the Director and HGCS will utilize such seal pending approval from the Director. Prior to running the intermediate casing downhole, all appropriate logging and testing operations will be completed. The long string casing will then be run and cemented to the surface to isolate and protect USDW zones. After an appropriate amount of time for cement setting, a cement bond log will be run to ensure a sufficient seal is in place to prevent

fluid migration into USDWs. Please refer to the *Pre-operations Formation Testing Section* of this permit for further details.

4.6. Injection Well Tubing and Packer Program

The tubing connects the injection zone to the wellhead, providing a pathway for safely injecting and storing CO₂. In accordance with 40 CFR § 146.86 (c), the tubing and packer material used for construction of the NCV-6 injection well will be compatible with fluids with which the material may be expected to come into contact with and will meet or exceed API and ASTM international standards. HGCS will inject CO₂ through corrosion-resistant tubing with a packer set at a depth opposite a cemented interval a location approved by the Director. While selecting the tubing and packers for the NCV-6 injection, the following factors were taken into consideration:

1. Depth of setting;
2. Characteristics of the CO₂ stream (chemical content, corrosiveness, temperature, and density) and formation fluids;
3. Maximum proposed injection pressure;
4. Maximum proposed annular pressure;
5. Proposed injection rate (intermittent or continuous) and volume and/or mass of the CO₂ stream;
6. Size of tubing and casing; and
7. Tubing tensile strength, burst and collapse pressures.

A summary of these factors is available in **Table 4-10, Table 4-11, and Table 4-12**. Any change to the tubing and packer specifics detailed in the below will be communicated to the Director.

Sensitive, Confidential, or Privileged Information

A series of seven horizontal black bars of varying lengths, with the first bar containing the red text "Sensitive, Confidential, or Privileged Information".

The annulus between the tubing and long-string casing will be filled with noncorrosive fluid described in further detail within the annular fluid program in Section 4.8 below.

Table 4-9. HGSS Injection Well Casing Program and Properties of Materials.

Sensitive, Confidential, or Privileged Information

Table 4-10. Required Specifications for Tubing and Packer Selection and Placement (§146.86(c))

Parameter	Attribute
Characteristics of the CO ₂ Stream	Chemical Content
	Corrosiveness
	Temperature
	Density
Characteristics of Formation Fluids (Mount Simon Reservoir)	Temperature
	Formation Pressure
	Fluid Density
	Salinity
Maximum Proposed Injection Pressure (Downhole)	3,704 psi
Maximum Proposed Annular Pressure	3,954 psi
Average Proposed Injection Rate (CO ₂)	2,740 Metric Tons/day
Volume of CO ₂ Stream	53 MMCF/day

Table 4-11. Specifications of the Anticipated CO₂ Stream Composition

Component	Specification	Unit
Minimum CO ₂	98	mole%, dry basis
Water content	< / = 20	lb/MMscf
Impurities (dry basis):		
Total Hydrocarbons	< / = 2	mol%
Inert Gases (N ₂ , Ar, O ₂)	< / = 2	mol%
Hydrogen	< / = 1	mol%
Alcohols, aldehydes, esters	< / = 500	ppmv
Hydrogen Sulfide	< / = 100	ppmv
Total Sulfur	< / = 100	ppmv
Oxygen	< / = 100	ppmv
Carbon monoxide	< / = 100	ppmv
Glycol	< / = 1	ppmv

Table 4-12. Tubing and Packer Details.

Item	Setting Depth (Approximate)	Tensile Strength (psi)	Burst Strength (psi)	Collapse Strength (psi)	Material (weight/grade/connection)
Tubing	Sensitive, Confidential, or Privileged Information				
<i>Packer</i> (Baker Hughes Model F Permanent Packer)					

*Setting depth interval is dependent on geological conditions observed in the field and is subject to change.

** JFEBEAR™ or similar premium connection

4.7. Injection Well Cementing Program

This section discusses the types and quantities of cement that will be used for each string of casing during construction of the HGSS NCV-6 injection well. In accordance with 40 CFR §146.86, the cement and cement additives were designed to have sufficient quality and quantity to maintain seal integrity throughout the life of the HGSS project and are compatible with the fluids (CO₂ stream and formation fluids) with which the materials may be expected to come into contact and meet or exceed API and ASTM standards. The cementing program has been designed to prevent the movement of fluids out of the sequestration zone into overlying USDWs. The cementing program was designed while considering the following critical factors:

1. Depth to the sequestration zone;
2. Injection pressure, external pressure, internal pressure, and axial loading;
3. Hole sizes;
4. Size and grade of all casing strings (wall thickness, external diameter, nominal weight, length, joint specification, and construction material);
5. Corrosiveness of the CO₂ stream and formation fluids;
6. Downhole temperatures;
7. Lithology of sequestration and confining zones;
8. Type or grade of cement and cement additives; and
9. Quantity, chemical composition, and temperature of the CO₂ stream.


After cementing each casing string to the surface, the integrity and location of cement will be verified using a cement-bond log capable of evaluating the cemental quality radially and

identifying the presence/location of channels to ensure against the likelihood of unintended release of CO₂ from the sequestration zone into the storage complex. Please refer to the pre-operational formation testing plan for further details. Any changes to the cement program will be communicated to the Director prior to well construction operations.

Table 4-13 below features the cement types, cement additives, quantities, and staging depths for each casing string. Each casing string will be cemented to the surface in one or more stages using the balance method. A sufficient number of casing centralizers will be used on all casing strings to centralize the casing in the hole and help ensure that cement completely surrounds the casing along the entire length of pipe. Except for the conductor casing, a guide shoe or float shoe will be run on the bottom of the bottom joint of casing and a float collar will be run on the top of the bottom joint of casing.

Due to the technical challenges involving cementing within geologic formations such as the Potosi Dolomite, the intermediate casing string of each HGSS injection well will be cemented in two stages. To facilitate a two-stage cement job, a multiple-stage cementing tool will be installed approximately 200 ft above the top of the Potosi Formation. After the completion of the first-stage cement job for the intermediate casing string, the multiple-stage cementing tool will be opened and fluid will be circulated down the casing and up the annulus above the cementing tool for a minimum of 8 hours to allow the first-stage cement job to acquire sufficient gel strength.

Sensitive, Confidential, or Privileged Information



Additionally, the excess space (“rathole”) from the top of the Argenta to the well’s terminal depth will be plugged back with EverCRETE to avoid unintended pressure transmission from the injection zone into the basement or near-basement zones. This will be likely be accomplished by setting the float shoe just above the top of the Argenta during long string cementing operations, however other methods may be considered. After an appropriate amount of setting time, cement-bond logs will be run and analyzed for each casing string as detailed in *Pre-operations Formation Testing Plan*.

Table 4-13. Specifications of the HGSS Cementing Program.


Sensitive, Confidential, or Privileged Information

4.8. Injection Well Annular Fluid

The annular space above the packer between the 9 5/8-inch long-string casing and the 5 1/2-inch injection tubing will be filled with a non-corrosive fluid to provide a positive pressure differential to stabilize the injection tubing and inhibit corrosion. The annular fluid will be a dilute salt solution such as potassium chloride (KCl), sodium chloride (NaCl), calcium chloride (CaCl₂), or similar solution. The fluid will be mixed onsite from dry salt and good quality (clean) freshwater, or it will be acquired pre-mixed. The fluid will also be filtered to ensure that solids do not interfere with the packer or other components of the annular protection system. The final choice of the type of fluid will depend on availability.

The annulus fluid will contain additives and inhibitors including a corrosion inhibitor, biocide (to prevent growth of harmful bacteria), and an oxygen scavenger. Example additives and inhibitors are listed below along with approximate mix rates:

Sensitive, Confidential, or Privileged Information



These products recommendations were provided by Tetra Technologies, Inc., of Houston, Texas. Actual products may vary from those described above.

4.9. Injection Wellhead and Valve Program


This section details the specifications of the injection wellheads and valves to be used for the NCV-6 injection well. All wellheads, valves, piping and surface facilities have been designed to meet or exceed API and ASTM international standards for the maximum anticipated injection pressure and will be maintained in a safe and leak-free condition. HGCS will equip all ports on the wellhead assembly above the casing bowl of injection wells with valves, blind flanges, or similar equipment. HGCS will also equip the injection well with valves to provide isolation of wells from the pipeline system and allow entry into the wells.

The HGSS NCV-6 injection wellhead will consist of the following components, from bottom to top:

Sensitive, Confidential, or Privileged Information



Sensitive, Confidential, or Privileged Information

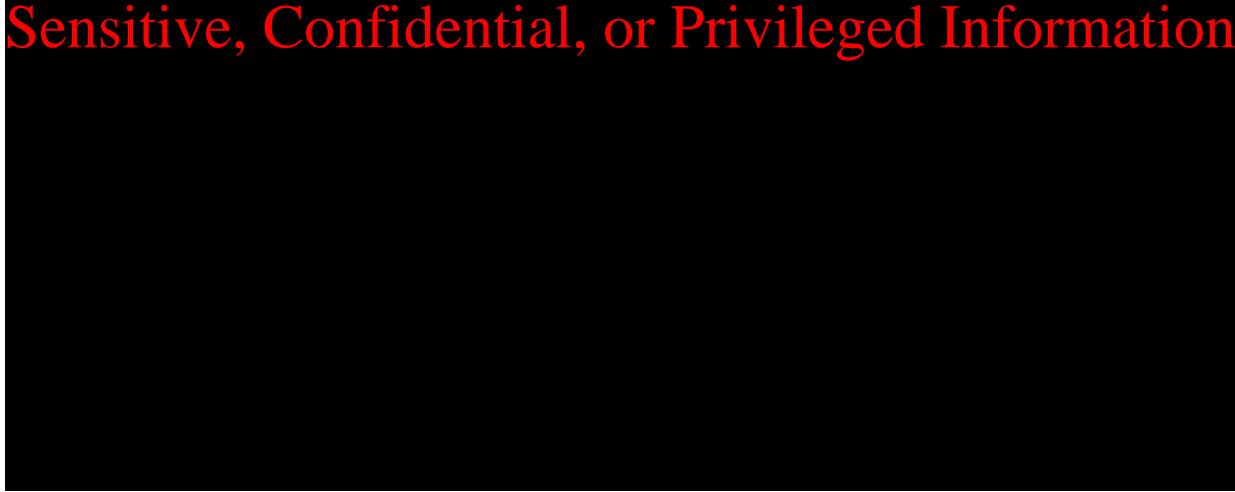

The wellhead and Christmas tree will be composed of materials that are designed to be compatible with the injection fluid upon which the material may be expected to come into contact with. All components that encounter the CO₂ injection fluid will be made of a corrosion-resistant alloy such as stainless steel. Because the CO₂ injection fluid will be very dry, use of stainless-steel components for the flow-wetted components is a conservative measure to minimize corrosion and increase the life expectancy of this equipment. Materials that will not have contact with the injection fluid, such as the surface casing and shallow portion of the long string, will be manufactured of carbon steel. A preliminary materials specification for the wellhead and Christmas tree assembly is described in **Table 4-14** using material classes as defined in American Petroleum Institute (API) Specification 6A (Specification for Wellhead and Christmas Tree Equipment). A summary of material class definitions is provided in **Table 4-15**. The final wellhead and Christmas tree materials specification may vary slightly from the information given below because neither has been selected yet. A generalized illustration of the wellhead and Christmas tree is provided in **Figure 4-5**. If any changes are made to the wellhead and valve program, HGSC will communicate these changes to the Director and will finalize program specifics upon approval from the Director.

Table 4-14. Materials Specification of Wellhead and Christmas Tree.

Component	Material Class ^(a)
Casing Head Housing (for 20-in. surface casing)	Sensitive, Confidential, or Privileged Information
Casing Head Spool (for 13-3/8-in. intermediate casing)	
Tubing Spool Assembly (for 9-5/8-in. long-string casing)	
Christmas Tree	

(a) When multiple classes are given, the highest class applies. Cameron uses this convention because not all components are available in all class types.

Table 4-15. Material Classes from API 6A (Spec. for Wellhead and Christmas Tree Equipment).

API Material Class	Body, Bonnet, End & Outlet Connections	Pressure Controlling Parts, Stems, & Mandrel Hangers
AA – General Service	Sensitive, Confidential, or Privileged Information	
BB – General Service		
CC – General Service		
DD – Sour Service ^(a)		
EE – Sour Service ^(a)		
FF – Sour Service ^(a)		
HH – Sour Service ^(a)		

Source: Cameron Surface Systems, Houston, Texas

(a) As defined by National Association of Corrosion Engineers (NACE) Standard MR075.

(b) In compliance with NACE Standard MR0175.

Sensitive, Confidential, or Privileged Information

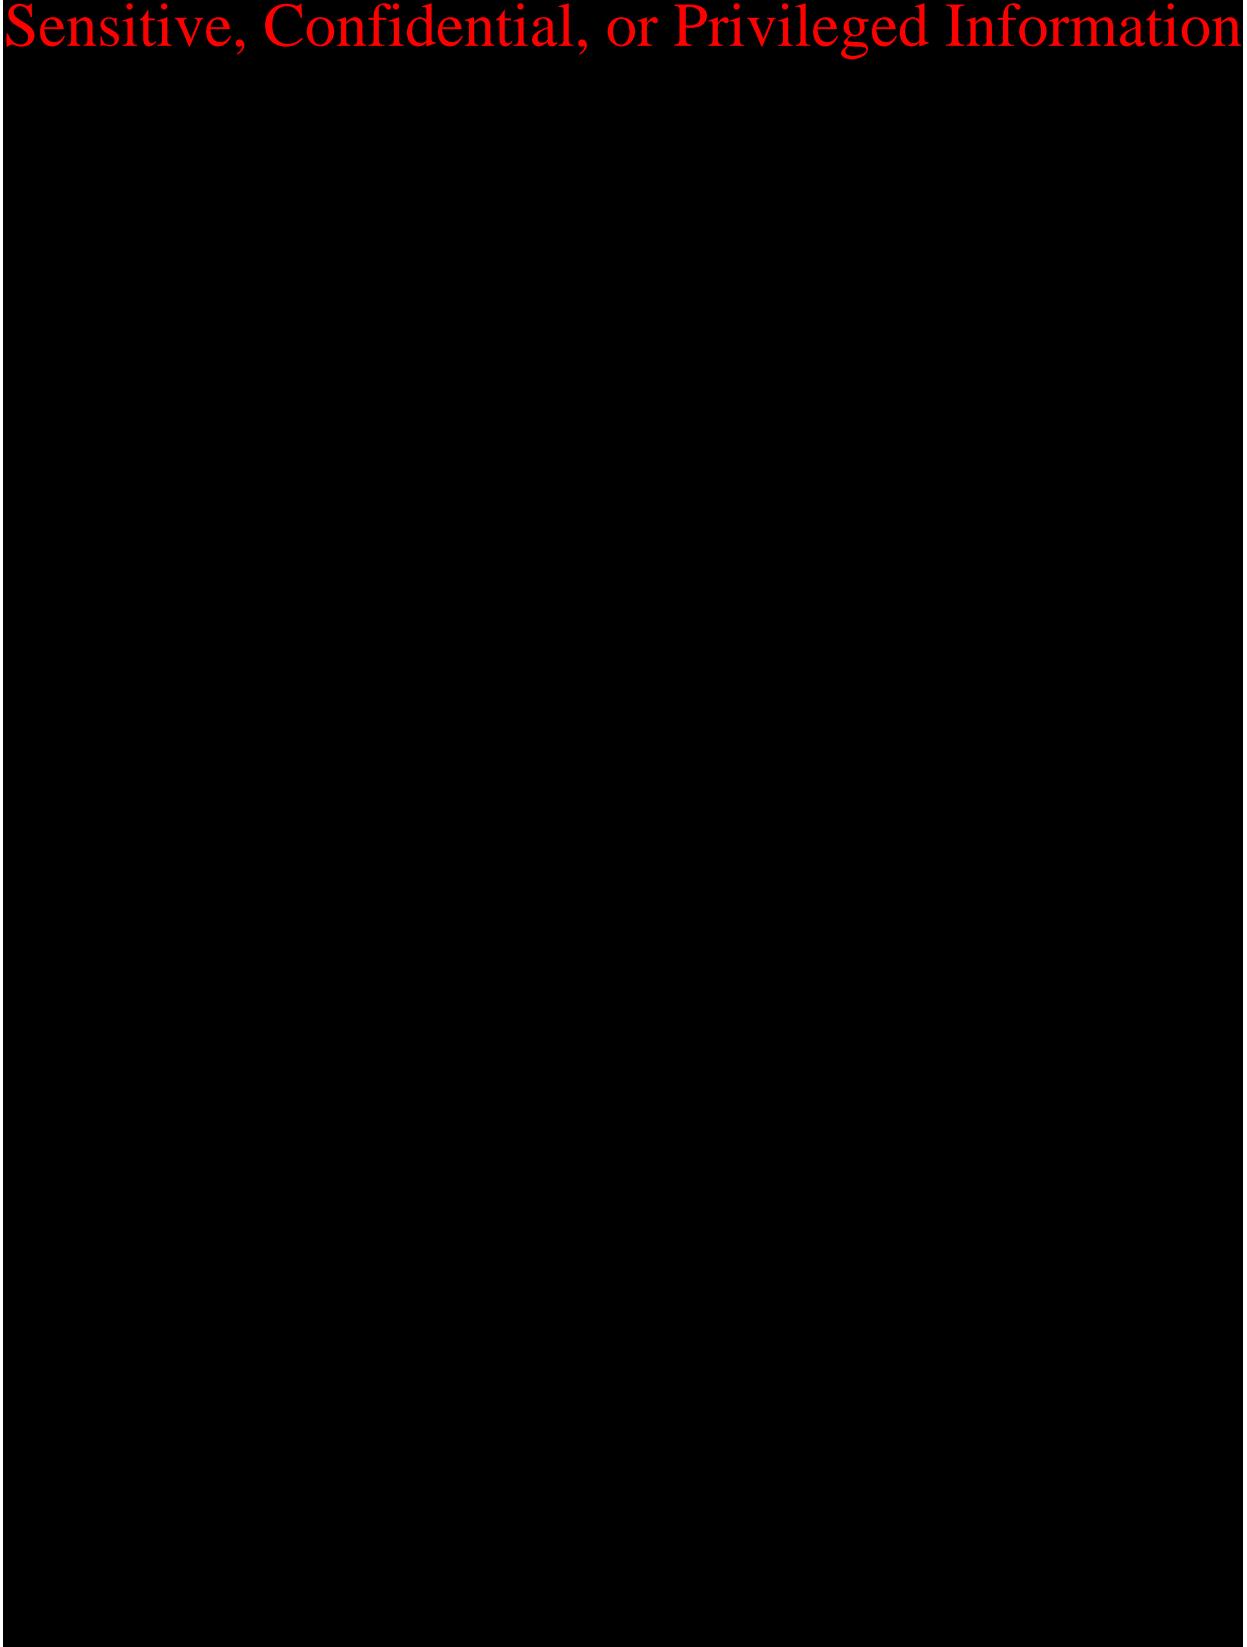


Figure 4-5. A design schematic of the HGSS injection wellhead and Christmas tree used for the NCV-6 CO₂ injection well.


4.10. Injection Well Routine Maintenance

HGCS will perform routine well maintenance on all injection wells. Routine maintenance will consist of wellhead valve maintenance and a review of recorded casing annular pressure measurements. If a significant deviation is noted (such that the mechanical integrity of the well is comprised or may become compromised), the appropriate remediation plan will be triggered. Please see the *Injection Well Operational Plan* and the *Emergency and Remedial Response Plan* sections for additional details.

4.11. Injection Well Perforation Program

The long-string casing will be perforated across the Mount Simon Sandstone with deep-penetrating shaped charges. The exact perforation interval will be determined after the well is drilled and characterized with geophysical logging/formation testing techniques.

Sensitive, Confidential, or Privileged Information

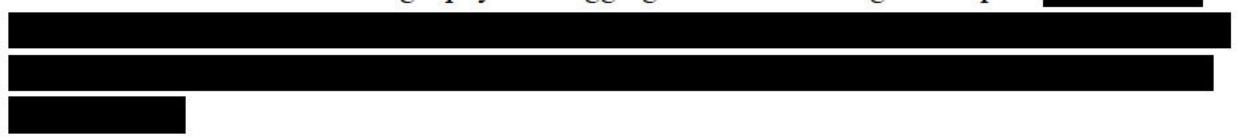

4.12. Summary of Monitoring Technologies Deployed in Injection Wells

To meet monitoring and operational requirements of 40 CFR §146.90 and §146.88, several technologies will be deployed within-and-around the NCV-6 injection well to monitor critical parameters needed to ensure sustained integrity of the HGSS storage complex and protection of overlying USDWs. **Table 4-16** below details the suite of monitoring technologies that will be deployed directly within or around injection wellbore and surface injection wellhead/tree assemblies. Please refer to the testing and monitoring section of this permit for a more detailed breakdown of the HGSS monitoring network, monitoring technologies and monitoring strategies.

Table 4-16. *Technologies Deployed in NCV-6 Injection Well for Monitoring Purposes

Device(s)	Location	Purpose	Monitoring category
Wellhead Pressure-Temperature Gauge	<small>Sensitive, Confidential, or Privileged Information</small>	Wellhead Injection Pressure and temperature	CO ₂ Injection Process Monitoring
Downhole Pressure - Temperature Gauge		Reservoir & Bottom-Hole Pressure/Temperature	
Continuous Annular Pressure Gauge		Annular Pressure Monitoring	
Downhole Pressure-Temperature Gauge		Annular Pressure Monitoring	


Device(s)	Location	Purpose	Monitoring category
Distributed Temperature Sensing (DTS)	Sensitive, Confidential, or Privileged Information	Distributed Temperature Monitoring (Reservoir, Upper Mt. Simon, Eau Claire, Argenta, Precambrian Basement)	CO ₂ Injection Process Monitoring & In-direct Plume Monitoring
Daniel Sr Orifice Mass Flow Meter		Injection Rate and Volume	CO ₂ Injection Process Monitoring
Distributed Acoustic Sensing Fiber Optics (DAS)		3D/4D VSP & Microseismic	In-direct Plume Monitoring & Seismicity Monitoring
Boreal Laser Gas Detection System		Leak Detection	Surface or Near Surface Monitoring

*Note this list of technology does not encompass all monitoring technologies deployed within the HGSS monitoring network; please refer to the testing and monitoring section for a detailed breakdown of the HGSS monitoring network and strategy.

4.13. Schematic of the Subsurface Construction Details of the HGSS Injection Wells

A generalized schematic of the HGSS NCV-6 injection well is shown in **Figure 4-6**. As discussed in the previous sections, the injection well will include the following casing strings:

Sensitive, Confidential, or Privileged Information

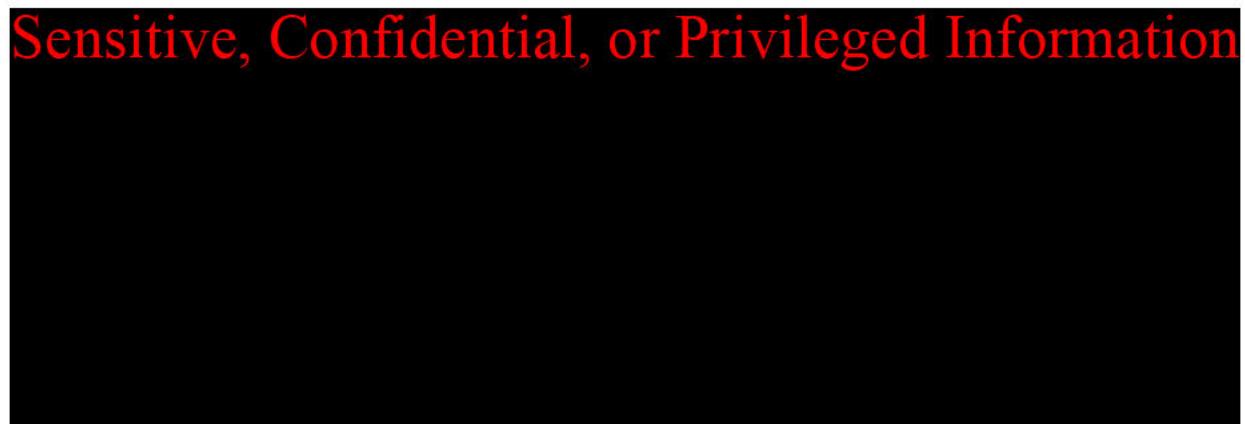

All depths are preliminary and will be adjusted based on additional characterization data obtained while drilling the CO₂ injection wells. The conductor, surface, intermediate, and long casing strings will be cemented to surface in accordance with 40 CFR §146.86. The purpose of the conductor string is to provide a stable borehole across the near-surface, unconsolidated glacial deposits before drilling the remaining deeper casing strings and to help protect the USDWs. Groundwater in the vicinity of the site is normally obtained from sand and gravel deposits that are contained within the unconsolidated Quaternary-aged material above bedrock.

According to the Illinois Geological Survey ILWATER map, unconsolidated sand, and gravel deposits within the vicinity of the proposed site can range in depth from about 0 to 500 ft bgs and bedrock can range in depth from 400-600 feet bgs. The surface string will extend across the uppermost bedrock layers (Pennsylvanian age) and will help to further isolate and protect the USDWs. The intermediate casing string will extend across and isolate deeper potentially unstable layers or layers where there is potential for lost circulation to ensure that the well can be drilled to total depth, in addition to isolating and protecting the deeper USDWs (St. Peter Sandstone). [REDACTED]

Sensitive, Confidential, or Privileged Information

[REDACTED]

[REDACTED]

Sensitive, Confidential, or Privileged Information




Figure 4-6. Design schematic of HGSS NCV-6 CO₂ injection well.